



SECTION - ADIT 597-50

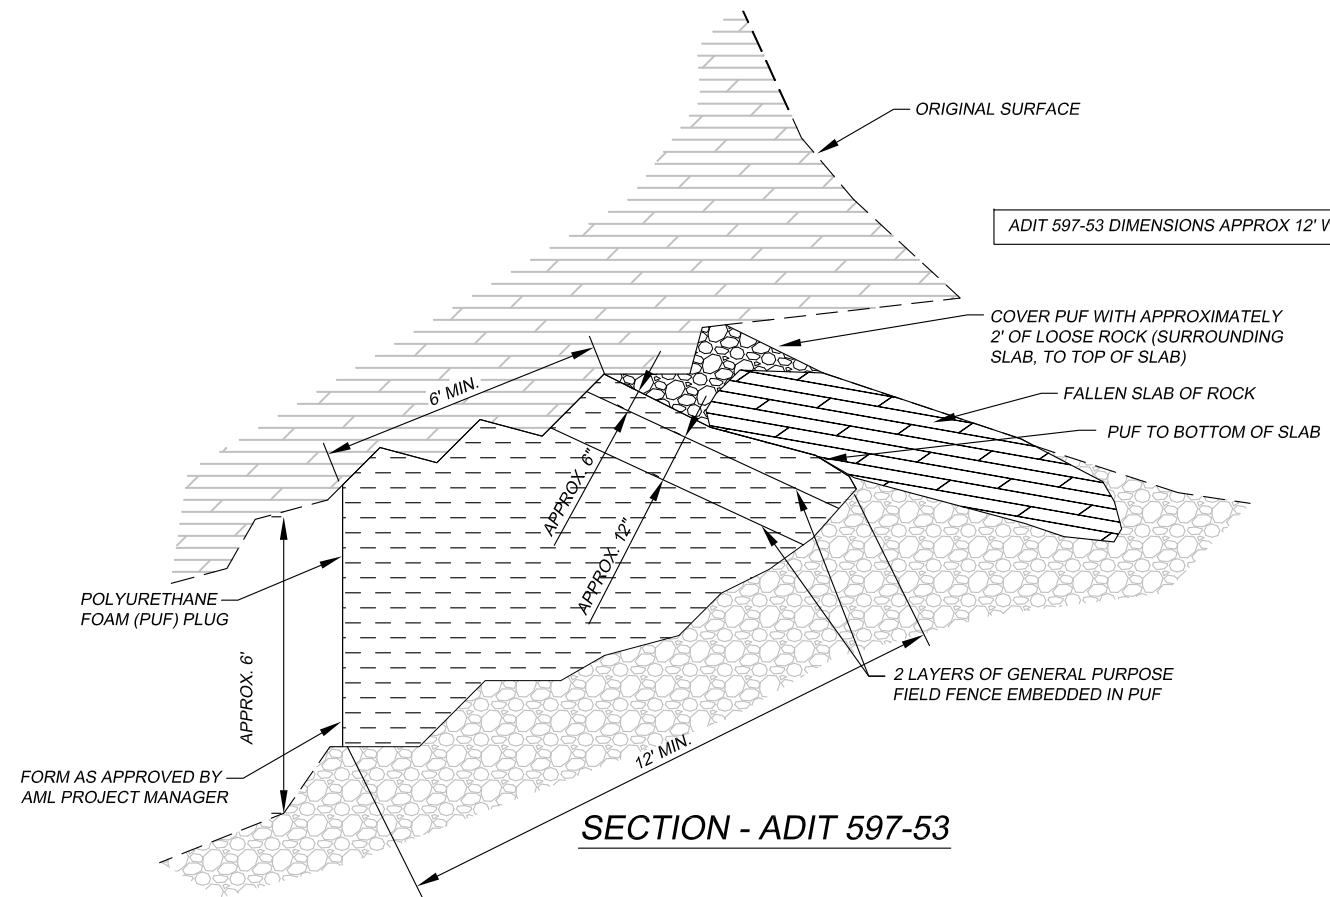

SECTION - ADIT 597-53

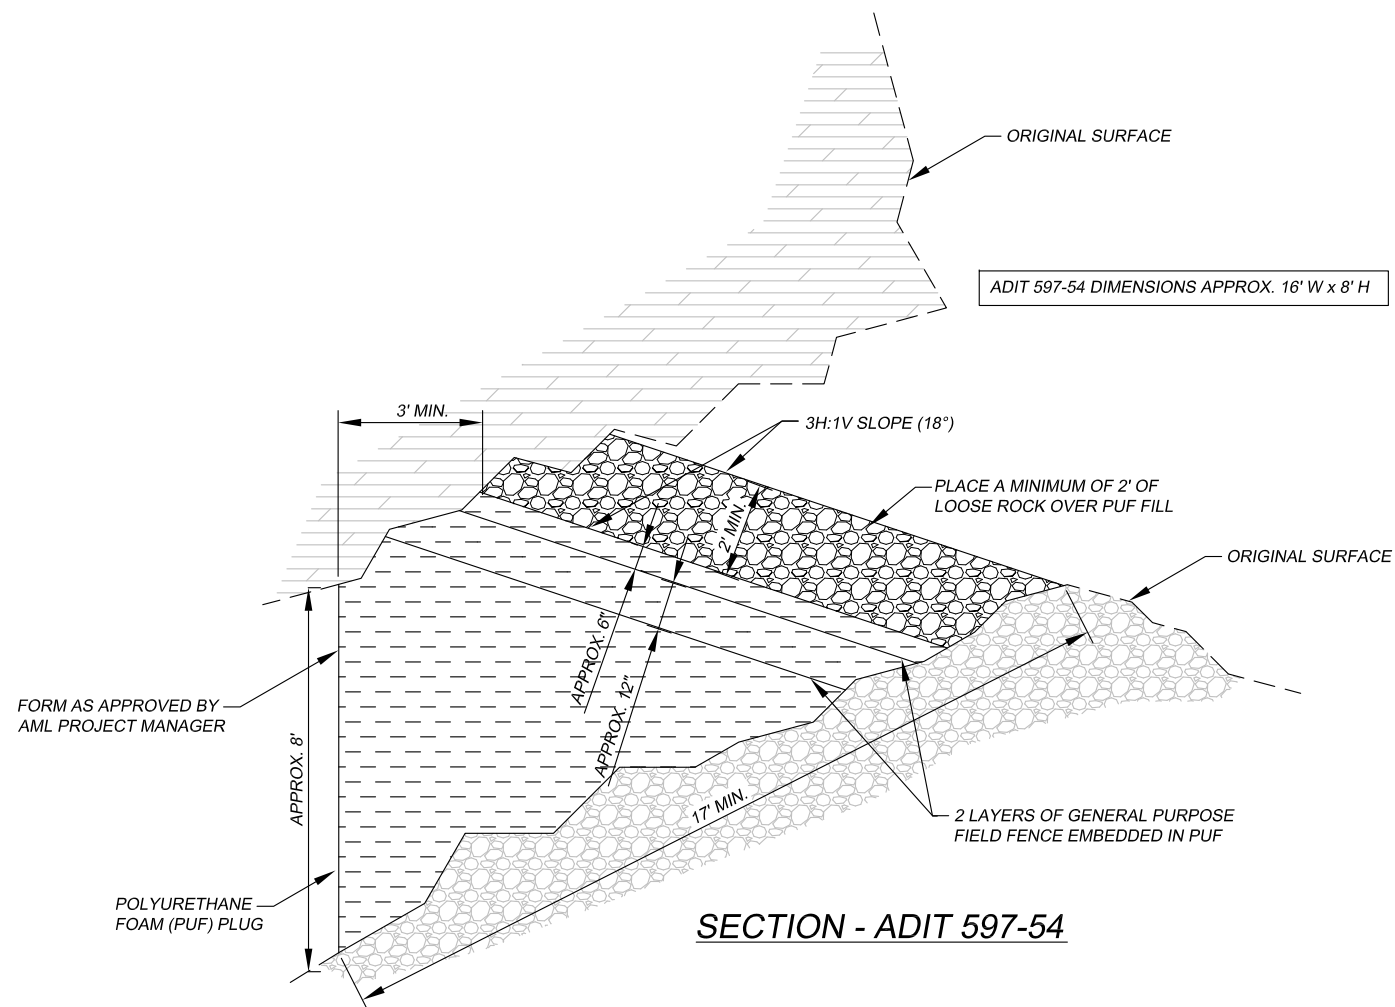

SECTION - ADIT 597-54

NOTE: THE CONTRACTOR SHALL PLACE TWO LAYERS OF GENERAL PURPOSE FIELD FENCE PERPENDICULAR TO THE FINAL FACE OF THE PUF FILL WITH THE LAYERS OF FENCING LOCATED APPROXIMATELY 6" AND 18" FROM THE FINAL FACE OF THE PUF FILL. THE FENCING SHALL HAVE 11 GA. FILLER WIRES, VERTICAL STAYS WITH A 6" SPACING, 9 GA. TOP/BOTTOM WIRES, ZINC COATED WITH A BRIGHT GALVANIZED FINISH. EACH LAYER OF FENCING SHALL COMPLETELY COVER THE OPEN SPACE OF THE ADIT AND THERE SHALL BE A MINIMUM 6" OVERLAP BETWEEN SECTIONS OF FENCING.

GENERAL NOTES:

1. THIS DRAWING SHOWS THE GENERAL SHAPE AND APPROXIMATE PROFILE OF THE ADITS AT THE INTENDED LOCATION OF THE CLOSURE. USE THE DRAWING AS A GUIDE FOR FIELD LAYOUT OF THE CLOSURE. FIELD VERIFY DIMENSIONS PRIOR TO CONSTRUCTION.
2. ROCK USED FOR PUF COVER SHALL BE DURABLE AS APPROVED BY THE AML PROJECT MANAGER.

CAUTION - THIS PROJECT REQUIRES CONSTRUCTION WORK IN, AROUND, AND OVER HAZARDOUS AND UNPROTECTED MINE SHAFTS, STOPES, ADITS, HIGHWALLS AND OTHER FEATURES WHICH MAY BE UNSTABLE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THOROUGHLY INVESTIGATING THE SITE CONDITIONS AND SCHEDULING EQUIPMENT, EQUIPMENT OPERATORS, OPERATIONS, PERSONNEL AND SAFETY PROCEDURES TO PREVENT ACCIDENTS AND INJURIES.

ABANDONED MINE LAND PROGRAM MINING AND MINERALS DIVISION ENERGY, MINERALS AND NATURAL RESOURCES DEPARTMENT		
SCALE: 1/4" = 10'	ADITS 597-50,53,54	DRAWN BY: JTG
DATE: DEC. 07, 2012		REVISED:
PUF PLUG WITH ROCK COVER		
Cleveland Mine Safeguard Project		DRAWING NUMBER: FIGURE 12