


**MOUNDED BACKFILL DESIGN
(TYPICAL SECTION)**

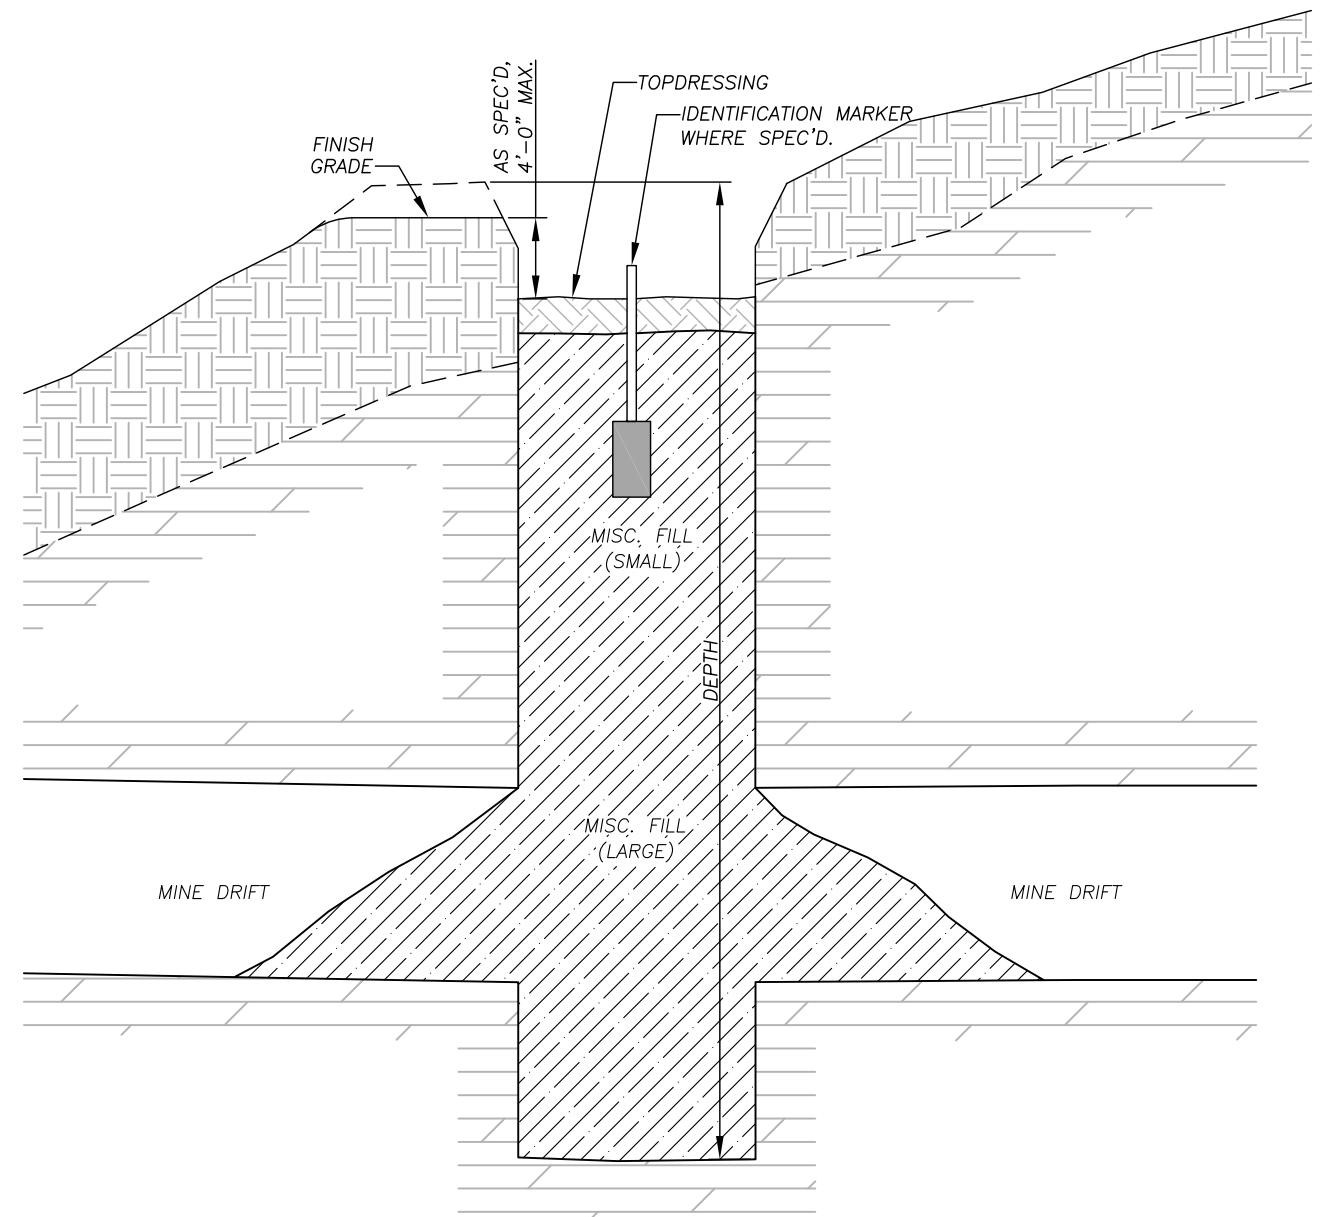

**DEPRESSED BACKFILL DESIGN
(TYPICAL SECTION)**

GENERAL NOTES:

1. THE FILL AT AND ABOVE DRIFT LEVELS SHALL CONSIST OF THE COARSEST MATERIAL AVAILABLE. SMALLER MATERIAL MAY BE USED ELSEWHERE. SEE THE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
2. AS PRACTICABLE, SHAPE THE REMAINING MINE WASTE MATERIAL TO RESEMBLE AN UNDISTURBED MINE WASTE PILE.
3. THE LENGTH AND WIDTH OF THE TOP OF THE MOUND SHALL BE EQUAL TO OR GREATER THAN THE INTERNAL SHAFT LENGTH AND WIDTH RESPECTIVELY.

| | | | |
|---|--|---------------|--|
| ABANDONED MINE LAND PROGRAM MINING AND MINERALS DIVISION NEW MEXICO ENERGY, MINERALS, AND NATURAL RESOURCES DEPARTMENT | | | |
| SCALE: NOT TO SCALE | VARIOUS LOCATIONS | DRAWN BY: JAK | |
| DATE: | | REVISED BY: | |
| SHAFT BACKFILL DESIGNS | | | |
| FILE: | CERRILLOS CENT/BONANZA CREEK MINE SAFEGUARD PROJECT-PH III | FIGURE: 16 | |