

NM1-57

Revised Permit Application

June 2014

**Volume 1:
Permit Application Text**

**STATE OF NEW MEXICO
DIRECTOR OF OIL CONSERVATION DIVISION**

**IN THE MATTER OF THE
APPLICATION OF DNCS
PROPERTIES, LLC FOR A
SURFACE WASTE MANAGEMENT
FACILITY PERMIT**

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**NOVEMBER 2013
(UPDATED JUNE 2014)**

VOLUME I: PERMIT APPLICATION TEXT

Prepared For:

**DNCS Properties, LLC
2028 E. Hackberry Place
Chandler, AZ 85286
480.437.0044**

Submitted To:


**New Mexico Energy, Minerals, and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505
505.476.3440**

Prepared By:

**Gordon Environmental, Inc.
213 S. Camino del Pueblo
Bernalillo, NM 87004
505.867.6990**

CERTIFICATION OF APPLICATION

The Permit Application submitted for the DNCS Environmental Solutions Surface Waste Management Facility located in Lea County, New Mexico, was prepared by me and technical staff under my direct supervision. I provided input and review to each of the consultants responsible for the preparation of the other technical reports. I certify that, to the best of my knowledge and belief, the information contained herein is accurate, and that the Permit Application complies with the current New Mexico Oil and Gas Rules (19.15.36 NMAC). I am a registered professional engineer in good standing in the State of New Mexico practicing under License No. 10984.

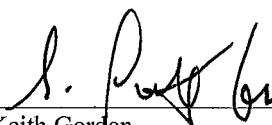
I. Keith Gordon
New Mexico P.E. No. 10984



SIGNATURE AND VERIFICATION


STATE OF Arizona)
COUNTY OF Maricopa)

I, Adrian Holman, being first duty sworn, state that I am a Member of DNCS Properties, LLC that I have read the foregoing Application for Permit including the contents of any exhibits, and the same is true and correct to the best of my knowledge and belief.


Adrian Holman
DNCS Properties, LLC

Subscribed and sworn to before me this 4 day of November 2013.


Notary Public Stephanie Scow
My Commission Expires 8-16-17



**STATE OF NEW MEXICO
DIRECTOR OF OIL CONSERVATION DIVISION**

**IN THE MATTER OF THE §
APPLICATION OF DNCS §
ENVIRONMENTAL SOLUTIONS §
FOR A SURFACE WASTE §
MANAGEMENT FACILITY PERMIT §**

APPLICATION FOR PERMIT

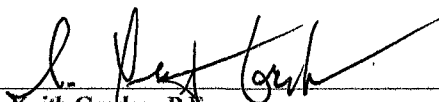

I. Keith Gordon, P.E.
Gordon Environmental, Inc.
213 South Camino del Pueblo
Bernalillo, New Mexico 87004
(505) 867-6990
Environmental Consultant to and
Representative of
DNCS Environmental Solutions
2028 E. Hackberry Place
Chandler, Arizona 85286
480.437.0044
Applicant

CERTIFICATION OF SERVICE

I hereby certify that a copy of the foregoing Application for Permit was delivered to the following party of record on _____, 2013

Oil Conservation Division
NM Energy, Minerals, and Natural Resources Dept.
1220 South St. Francis Drive
Santa Fe, New Mexico 87505

(Signature of person receiving copy)

(Name of signer)

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

For State Use Only

Form C-137
Revised August 1, 2011

Submit 1 Copy to Santa Fe Office

APPLICATION FOR SURFACE WASTE MANAGEMENT FACILITY

A meeting should be scheduled with the Division's Santa Fe office Environmental Bureau prior to pursuing an application for a surface waste management facility in order to determine if the proposed location is capable of satisfying the siting requirements of Subsections A and B of 19.15.36.13 NMAC for consideration of an application submittal.

1. Application: ☒ New ☐ Modification ☐ Renewal
2. Type: ☒ Evaporation ☐ Injection ☒ Treating Plant ☒ Landfill ☐ Landfarm ☐ Other
3. Facility Status: ☒ Commercial ☐ Centralized

4. Operator: DNCS Properties, LLC

Address: 2028 E. Hackberry Place, Chandler, AZ 85286

Contact Person: Adrian Holman

Phone: 480.437.0044

5. Location: See Application /4 31,6 /4 Section 17, 18 Township 33 East Range

6. Is this an existing facility? ☐ Yes ☒ No If yes, provide permit number _____

7. Attach the names and addresses of the applicant and principal officers and owners of 25 percent or more of the applicant. Specify the office held by each officer and identify the individual(s) primary responsible for overseeing management of the facility.

8. Attach a plat and topographic map showing the surface waste management facility's location in relation to governmental surveys (quarter-quarter section, township and range); highways or roads giving access to the surface waste management facility site; watercourses; fresh water sources, including wells and springs; and inhabited buildings within one mile of the site's perimeter.

9. Attach the names and addresses of the surface owners of the real property on which the surface waste management facility is sited and surface owners of the real property within one mile of the site's perimeter.

10. Attach a description of the surface waste management facility with a diagram indicating the location of fences and cattle guards, and detailed construction/installation diagrams of pits, liners, dikes, piping, sprayers, tanks, roads, fences, gates, berms, pipelines crossing the surface waste management facility, buildings and chemical storage areas.

11. Attach engineering designs, certified by a registered professional engineer, including technical data on the design elements of each applicable treatment, remediation and disposal method and detailed designs of surface impoundments.

12. Attach a plan for management of approved oil field wastes that complies with the applicable requirements contained in 19.15.36.13, 19.15.36.14, 19.15.36.15 and 19.15.36.17 NMAC.

13. Attach an inspection and maintenance plan that complies with the requirements contained in Subsection L of 19.15.36.13 NMAC.

14. Attach a hydrogen sulfide prevention and contingency plan that complies with those provisions of 19.15.3.118 NMAC that apply to surface waste management facilities.

15. Attach a closure and post closure plan, including a responsible third party contractor's cost estimate, sufficient to close the surface waste management facility in a manner that will protect fresh water, public health, safety and the environment (the closure and post closure plan shall comply with the requirements contained in Subsection D of 19.15.36.18 NMAC).

16. Attach a contingency plan that complies with the requirements of Subsection N of 19.15.36.13 NMAC and with NMSA 1978, Sections 12-12-1 through 12-12-30, as amended (the Emergency Management Act).

17. Attach a plan to control run-on water onto the site and run-off water from the site that complies with the requirements of Subsection M of 19.15.36.13 NMAC.

18. In the case of an application to permit a new or expanded landfill, attach a leachate management plan that describes the anticipated amount of leachate that will be generated and the leachate's handling, storage, treatment and disposal, including final post closure options.

19. In the case of an application to permit a new or expanded landfill, attach a gas safety management plan that complies with the requirements of Subsection O of 19.15.36.13 NMAC.

20. Attach a best management practice plan to ensure protection of fresh water, public health, safety and the environment.

21. Attach a demonstration of compliance with the siting requirements of Subsections A and B of 19.15.36.13 NMAC.

22. Attach geological/hydrological data including:

- (a) a map showing names and location of streams, springs or other watercourses, and water wells within one mile of the site;
- (b) laboratory analyses, performed by an independent commercial laboratory, for major cations and anions; benzene, toluene, ethyl benzene and xylenes (BTX); RCRA metals; and total dissolved solids (TDS) of ground water samples of the shallowest fresh water aquifer beneath the proposed site;
- (c) depth to, formation name, type and thickness of the shallowest fresh water aquifer;
- (d) soil types beneath the proposed surface waste management facility, including a lithologic description of soil and rock members from ground surface down to the top of the shallowest fresh water aquifer;
- (e) geologic cross-sections;
- (f) potentiometric maps for the shallowest fresh water aquifer; and
- (g) porosity, permeability, conductivity, compaction ratios and swelling characteristics for the sediments on which the contaminated soils will be placed.

23. In the case of an existing surface waste management facility applying for a minor modification, describe the proposed change and identify information that has changed from the last C-137 filing.


24. The division may require additional information to demonstrate that the surface waste management facility's operation will not adversely impact fresh water, public health, safety or the environment and that the surface waste management facility will comply with division rules and orders.

25. CERTIFICATION

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name: Adrian Holman

Title: Member

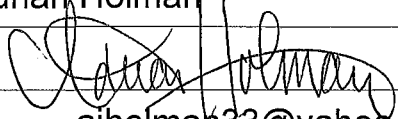Signature: 

Date: 6/21/2014

E-mail Address: ajholman33@yahoo.com

DNCS Surface Waste Management Facility

Applicant:

DNCS Properties, LLC
2028 E. Hackberry Place
Chandler, AZ 85286

Members:

1) Bryce Karger, Managing Member – 50% Ownership
2028 E. Hackberry Place
Chandler, AZ 85286

2) Adrian Holman, Member – 50% Ownership
2028 E. Hackberry Place
Chandler, AZ 85286

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

TABLE OF CONTENTS

**CERTIFICATION OF APPLICATION
CERTIFICATION OF SERVICE
C-137 APPLICATION FOR SURFACE WASTE MANAGEMENT FACILITY**

VOLUME I: PERMIT APPLICATION TEXT

| <u>Section</u> | <u>Title</u> |
|-----------------------|-------------------------------------|
| 19.15.36 | Surface Waste Management Facilities |

VOLUME II: FACILITY MANAGEMENT PLANS

| <u>Section</u> | <u>Title</u> |
|-----------------------|---|
| 1 | Operations, Inspection, and Maintenance Plan |
| 2 | Oil Field Waste Management Plan |
| 3 | Hydrogen Sulfide (H ₂ S) Prevention and Contingency Plan |
| 4 | Closure/Post-Closure Plan |
| 5 | Contingency Plan |
| 6 | Migratory Bird Protection Plan |
| 7 | Liner Construction Quality Assurance (CQA) Plan |
| 8 | Vadose Zone Monitoring Plan |
| 9 | Leachate Management Plan |

VOLUME III: ENGINEERING DESIGN AND CALCULATIONS

| <u>Section</u> | <u>Title</u> |
|-----------------------|--|
| 1 | Engineering Design |
| 2 | Volumetrics Calculations |
| 3 | Drainage Calculations |
| 4 | HELP Model |
| 5 | Pipe Loading Calculations |
| 6 | Geosynthetic Application and Compatibility Documentation |
| 7 | Tensile Stress Analysis |
| 8 | Erosion Calculations |
| 9 | Settlement Calculations |
| 10 | Evaporation Pond Calculations |
| 11 | Wave Action Calculations |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

TABLE OF CONTENTS (cont.)

VOLUME IV: SITING AND HYDROGEOLOGY

| <u>Section</u> | <u>Title</u> |
|-----------------------|---------------------|
| 1 | Siting Criteria |
| 2 | Hydrogeology |

LIST OF PERMIT PLANS

| <u>Sheet</u> | <u>Title</u> |
|---------------------|---|
| 1 | Cover Sheet and Drawing Index |
| 2 | Existing Site Conditions |
| 3 | Site Development Plan |
| 4 | Landfill Base Grading Plan |
| 5 | Landfill Final Grading Plan |
| 6 | Landfill Cross Sections |
| 7 | Landfill Completion Drainage Plan |
| 8 | Liner System and Cover Details |
| 9 | Leachate Collection System Details |
| 10 | Stormwater Drainage Details |
| 11 | Processing Area Layout |
| 12 | Evaporation Pond Details |
| 13 | Evaporation Pond and Stabilization/Solidification Area Cross Sections |
| 14 | Processing Area Cross Sections |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|--|-------------|
| 1.0 | INTRODUCTION..... | I-1 |
| 19.15.36.8 | SURFACE WASTE MANAGEMENT FACILITY PERMITS AND APPLICATION REQUIREMENTS:..... | I-13 |
| 19.15.36.9 | NOTICE REQUIREMENTS FOR NEW SURFACE WASTE MANAGEMENT FACILITIES, MAJOR MODIFICATIONS OR RENEWALS AND ISSUANCE OF A TENTATIVE DECISION: | I-22 |
| 19.15.36.10 | COMMENTS AND HEARING ON APPLICATION:..... | I-24 |
| 19.15.36.11 | FINANCIAL ASSURANCE REQUIREMENTS:..... | I-25 |
| 19.15.36.12 | PERMIT APPROVAL, DENIAL, REVOCATION, SUSPENSION, MODIFICATION OR TRANSFER:..... | I-28 |
| 19.15.36.13 | SITING AND OPERATIONAL REQUIREMENTS APPLICABLE TO ALL PERMITTED SURFACE WASTE MANAGEMENT FACILITIES: EXCEPT AS OTHERWISE PROVIDED IN 19.15.36 NMAC. | I-32 |
| 19.15.36.14 | SPECIFIC REQUIREMENTS APPLICABLE TO LANDFILLS:..... | I-43 |
| 19.15.36.15 | SPECIFIC REQUIREMENTS APPLICABLE TO LANDFARMS:..... | I-62 |
| 19.15.36.16 | SMALL LANDFARMS:..... | I-62 |
| 19.15.36.17 | SPECIFIC REQUIREMENTS APPLICABLE TO EVAPORATION, STORAGE, TREATMENT AND SKIMMER PONDS:..... | I-62 |
| 19.15.36.18 | CLOSURE AND POST CLOSURE: | I-70 |
| 19.15.36.19 | EXCEPTIONS AND WAIVERS:..... | I-77 |
| 19.15.36.20 | TRANSITIONAL PROVISIONS: | I-78 |

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|-----------------------------------|-------------|
| I.1 | SITE LOCATION MAP..... | I-2 |
| I.2 | SITE PLAN..... | I-4 |
| I.3 | SITE TOPOGRAPHY | I-15 |
| I.4 | SITE ENTRANCE SIGN (TYPICAL)..... | I-38 |
| I.5 | LINER SCHEMATIC..... | I-50 |
| I.6 | FINAL COVER PROFILE..... | I-51 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**

LIST OF TABLES

| Table No. | Title | Page |
|------------------|---------------------------------------|-------------|
| I.1 | SITE ACREAGES | I.3 |
| I.2 | ESTIMATED OPERATIONAL RATES | I.5 |
| I.3 | PROPOSED FACILITIES | I.5 |
| I.4 | DNCS DEVELOPMENT SEQUENCE | I.7 |
| I.5 | LIST OF PERMIT PLANS..... | I.9 |
| I.6 | LIST OF ACRONYMS AND DEFINITIONS..... | I.10 |
| I.7 | FIRE PREVENTION AND CONTROL | I.44 |
| I.8 | DUST CONTROL | I.45 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| I.A | PUBLIC NOTIFICATION |
| I.B | FINANCIAL ASSURANCE |
| I.C | BOUNDARY SURVEY (PETTIGREW & ASSOCIATES PA, 12/13/2012) |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**


1.0 INTRODUCTION

DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

DNCS Properties, LLC herein submits this Application for Permit (Application) for the proposed DNCS Facility. This Application has been developed in order to address the specific standards of 19.15.36 NMAC. As a Surface Waste Management Facility per 19.15.2.7.S.11 NMAC, DNCS will meet the siting, design, and operating requirements of 19.15.36 NMAC, as detailed in this Application. More specifically, the proposed DNCS Facility is a “*commercial facility*” as defined in Section 19.15.36.7.A.(2) NMAC: “... *a surface waste management facility that is not a centralized facility*”, more specifically a landfill and a processing area.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre ± tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, in Lea County, NM. Site access will be provided via the south side of NM 529. A Site Location Map is provided as **Figure I.1**.

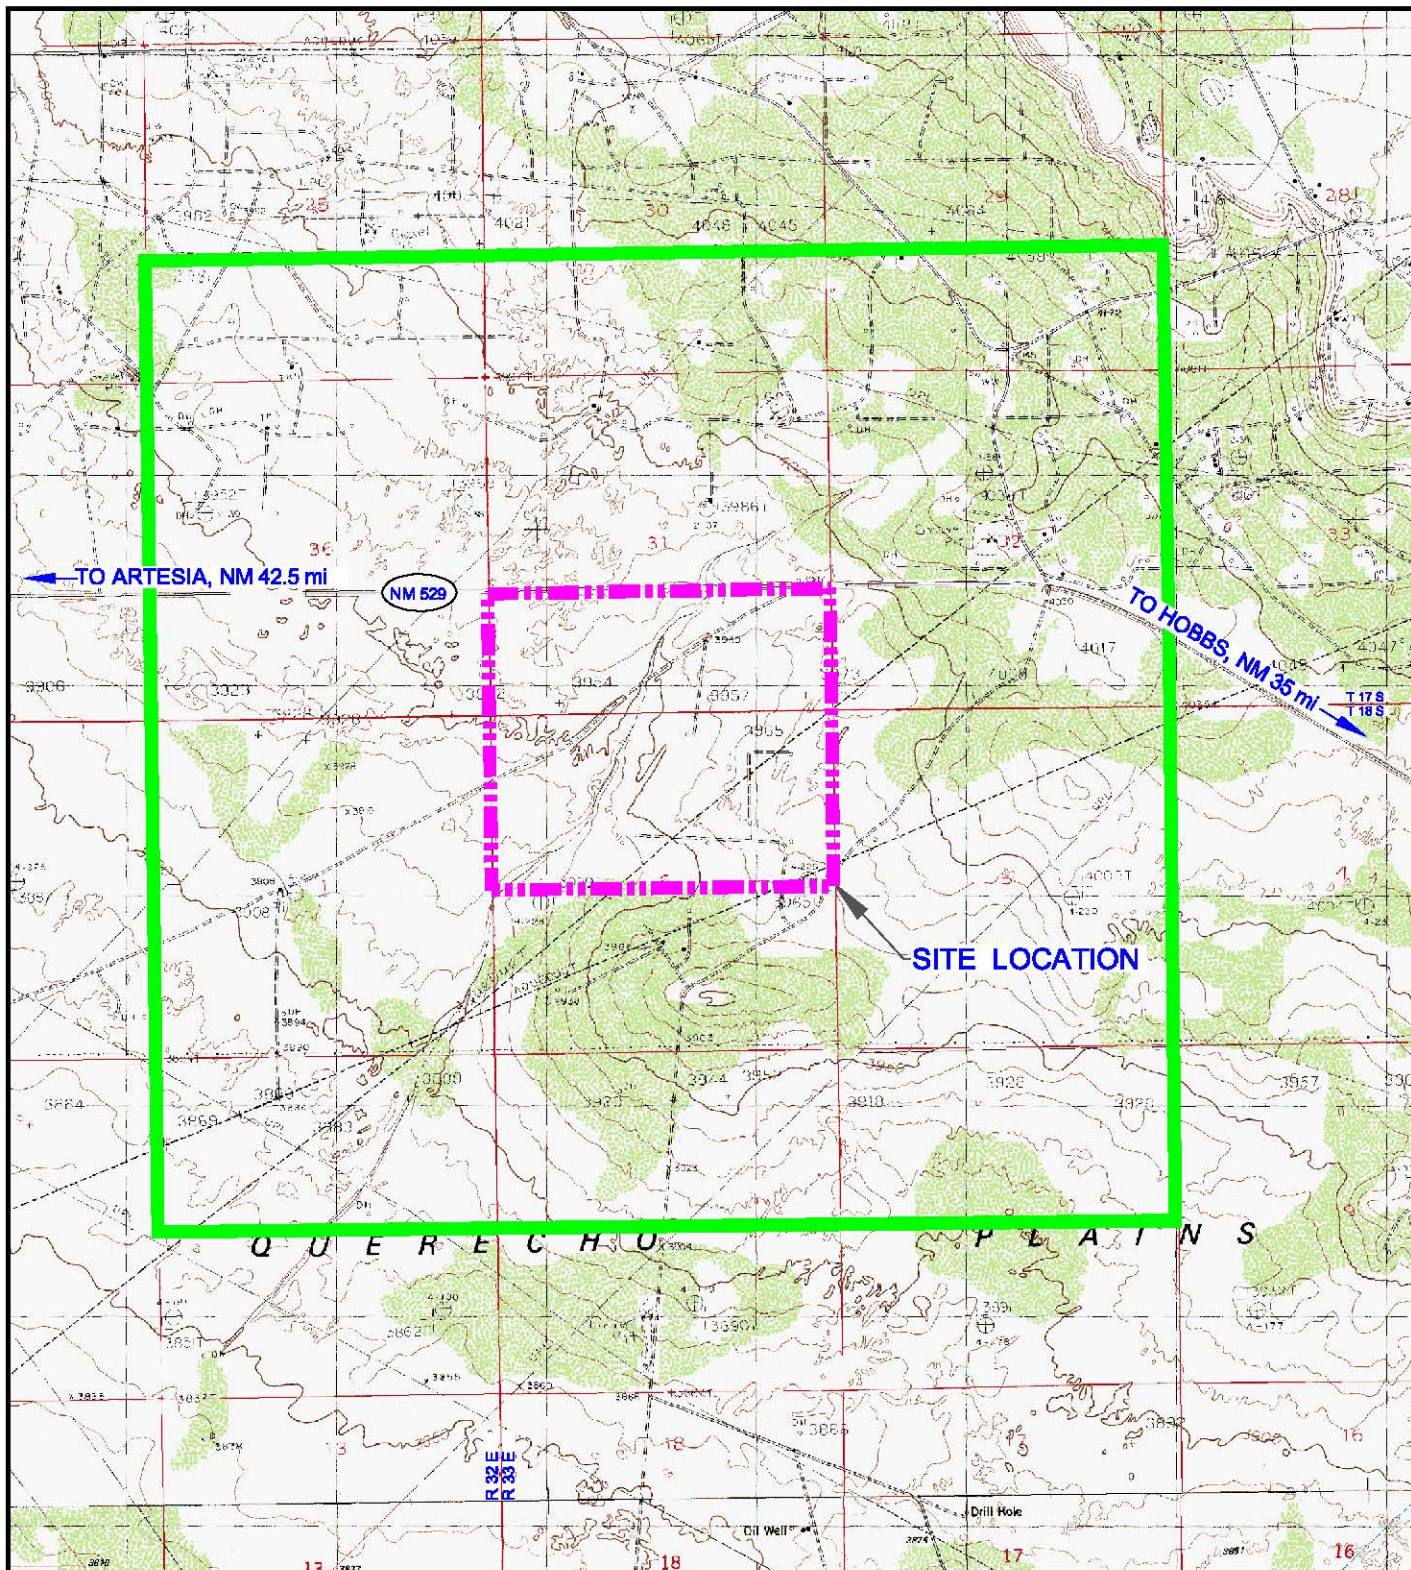


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:50:41 ; LAYOUT: A (P)

Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE I.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

1.2 Site Description

A portion of the 562-acre tract is a drainage feature that will be excluded from development. The drainage feature includes a 500-ft buffer zone that totals 67 acres \pm . The DNCS Facility will include two main components; a liquid oil field waste Processing Area (177 acres \pm); and an oil field waste Landfill (318 acres \pm). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Plan provided as **Figure I.2** identifies the locations of the Processing Area and Landfill facilities, and **Table I.1** provides a description of site acreages. Perimeter setbacks in excess of 200 ft are provided for surface water management and site access, as well as a buffer zone to adjacent properties.

TABLE I.1
Site Acreages
DNCS Environmental Solutions

| Description | Acres (\pm) |
|---|---------------------------------|
| DNCS Site: Total Tract | 562 |
| Drainage Feature (including buffer zone) | 67 |
| Surface Waste Management Facility Boundary | 495 |
| Surface Waste Management Facility: Processing Area (West Tract) | 177 |
| Surface Waste Management Facility: Landfill (East Tract) | 318 |
| Landfill: Disposal Footprint | 234 |
| Processing Area: Operations Footprint | 98 |

A Site Plan which identifies the layout of the proposed DNCS Facility is provided as **Figure I.2**. Operations at the proposed DNCS Facility will be constructed in phases over a period of several years, as dictated by demand. The estimated Facility operational rates are presented in **Table I.2**, and the phased development sequence is described in Section 1.3 and **Table I.4**.

TABLE I.2
Estimated Operational Rates^{1,2,3}
DNCS Environmental Solutions

| | |
|---|----------------|
| Average Daily Liquid Operational Rate | 10,000 bbl/day |
| Maximum Daily Liquid Operational Rate | 12,000 bbl/day |
| Average Daily Solid Waste Acceptance Rate | 2,500 cy/day |
| Maximum Daily Solid Waste Acceptance Rate | 5,000 cy/day |
| Liquid Receiving and Storage Capacity | 949,400 bbl |

Notes:

¹Subject to change. The estimated operational rates are based on familiarity with local oil and gas industry operations; therefore this list may be modified in response to changes in waste streams, market conditions, technology, etc.

²bbl = barrels of oil

³cy = cubic yards

The proposed DNCS surface waste management facilities are listed in **Table I.3**, and identified on the Site Plan provided as **Figure I.2**.

TABLE I.3
Proposed Facilities¹
DNCS Environmental Solutions

| Description | No. |
|---------------------------------------|------------|
| Oil field waste disposal landfill | 1 |
| Produced water load-out points | 9 |
| Produced water receiving tanks | 12 |
| Produced water settling tanks | 48 |
| Mechanical oil/water separation unit | 4 |
| Evaporation ponds | 12 |
| Stabilization and Solidification Area | 1 |
| Oil treatment plant | 1 |
| Crude oil recovery tanks | 5 |
| Oil sales tanks | 5 |
| Customer jet wash | 1 (6 bays) |

Note:

¹Subject to change. The proposed facilities are based on projected waste types and volumes; therefore this list may be modified in response to changes in waste streams, market conditions, technology, etc.

The improvements identified in **Table I.3** are discussed in detail in this Application. In addition, various support facilities, including: an office, scale(s), waste acceptance/security, maintenance building, roads, break room, emergency shower & eyewash station, and stormwater detention basins are proposed for the new Facility (see **Engineering Design, Volume III**).

1.3 Development Sequence

The development sequence for the DNCS Facility is proposed to be conducted in four primary phases (**Table I.4**). This phased development sequence is estimated to take place over a period of approximately four years from the issuance of the Permit, depending on the demand for the services provided by the Facility. However, different combinations of these improvements may be constructed to any time. The phased development is projected as follows:

Phase I - Initial Landfill and Produced Water Processing Operation. This Phase will include the initial 13.5-acre cell (**Figure I.2**) of the landfill where landfiling of materials will be conducted. This Phase will also include:

- The installation of four Produced Water Load-Out points
- The complete tank farm berm
- The 75 horsepower (HP) boiler circulating a heat transfer fluid to the four 1,000 barrel (bbl) heated Produced Water Receiving Tanks
- Sixteen 1,000 bbl Produced Water Settling Tanks
- A heated 1,000 bbl Crude Oil Recovery Tank
- A 1,000 bbl Oil Sale Tank
- A mechanical oil/water separation unit
- Four Evaporation Ponds with a capacity of 9.5 acre-feet each, capable of evaporating 3,000 bbl per day of liquid.

It is estimated that this Phase will be completed within approximately one year of permitting.

Phase II - Jet-Out Pit Operation. This Phase of the operation will include installation of the six-station Jet-Out Pit for handling bottom sediment and water (BS&W), Tank Bottoms, Oily Drilling Muds and Tank Wash-Outs. A heated 1,000 bbl Crude Oil Recovery Tank will be installed in the Tank Farm. It is estimated that this Phase will be completed within approximately two years of permitting.

TABLE I.4
DNCS Development Sequence¹
DNCS Environmental Solutions

| Description | Summary | Year No. ² |
|--|---|-----------------------|
| Phase I - Initial Landfill & Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Initial Landfill Cell (13.5-acres) Produced water load-out points (4) Tank farm berm (complete) Boiler (75 HP) running a heat transfer fluid tank farm Produced Water Receiving Tanks (4), 1,000 bbl capacity³ Settling Tanks (16), 1,000 bbl capacity Crude Oil Recovery Tank (1), 1,000 bbl capacity Oil Sale Tank (1), 1,000 bbl capacity Mechanical Oil/Water Separation Unit Ponds (4) capable of evaporating 3,000 bbl of liquid per day | The oil recovered from the Produced Water Processing Operations process is anticipated to be 6 bbl per day. This material will be pumped to the heated crude oil recovery tank for further processing before being pumped to the oil sale tank. | 1 |
| Phase II - Jet-Out Pit Operation. | | |
| <ul style="list-style-type: none"> Jet-Out Pit (six-station) for handling basic sediment and water (BS&W), tank bottoms, oily drilling muds and tank wash-outs Additional crude oil recovery tank (1), 1,000 bbl capacity Install 5-acre Stabilization and Solidification area | The oil recovered from the top of the Jet-Out Pit will be pumped to a heated Crude Oil Recovery Tank installed in the Tank Farm. Oil recovery from the Produced Water Tanks will also be plumbed to this tank. Water recovered from the Pit will be pumped to the Produced Water Receiving Tanks. Sediments from the Pit will be bucket-loaded out of the pit and transferred to the Stabilization and Solidification Area for processing prior to landfilling. | 2 |
| Phase III - Expanded Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Produced water load-out points (4) Additional Produced Water Receiving Tanks (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Crude Oil Recovery Tanks (3), 1,000 bbl capacity Additional Oil Sales Tanks (2), 1,000 bbl capacity Additional (2) Mechanical Oil/Water Separation Units Additional ponds (4) capable of evaporating an additional 5,000 bbl per day of liquid | The additional oil recovered from the expanded Produced Water Processing Operation process, anticipated to be 6 bbl per day, will be pumped to the Crude Oil Recovery tanks for further processing. | 3 |
| Phase VI - Ultimate Produced Water Processing Facility. | | |
| <ul style="list-style-type: none"> Additional Produced Water Receiving Tank (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Oil Sales Tanks (1), 1,000 bbl capacity Additional Mechanical Oil/Water Separation Unit Additional ponds (4) capable of evaporating an additional 4,000 bbl per day of liquid | The additional oil recovered from the ultimate Produced Water Processing Facility will be pumped to the Crude Oil Recovery Tank for further processing. | 4 |

Notes:

¹ The DNCS site development sequence is subject to change. Different combination of these improvements may be constructed at any time.

² Estimated number of years after OCD Surface Waste Management Facility Permit issued

³ bbl = barrels of oil

Phase III - Expanded Produced Water Processing Operation. This Phase will include the installation of an additional four Produced Water Load-Out points, four additional 1,000 bbl heated Produced Water Receiving Tanks, sixteen additional 1,000 bbl Produced Water Settling Tanks, three additional Crude Oil Recovery Tanks, an additional mechanical oil/water separator unit and four additional 9.5 acre-foot ponds capable of evaporating an additional 5,000 bbl per day of liquid. It is estimated that this Phase will be completed within approximately three years of permitting.

Phase IV- Ultimate Produced Water Processing Facility. This Phase will include the installation of two additional Produced Water Load-Out points, four additional 10,000 bbl heated Produced Water Receiving Tanks, sixteen additional 1,000 bbl Produced Water Settling Tanks, an additional mechanical oil/water separator unit, and four additional Evaporation Ponds capable of evaporating an additional 4,000 bbl per day of liquid. It is estimated that this Phase will be completed within approximately four years of permitting.

1.4 Permit Application Format

For ease of review and reference, this Application for Permit has been organized into a four-volume set, in the same order and format as the current Rules for Surface Waste Management Facilities (19.15.36 NMAC). OCD Form C-137 (*Application for Surface Waste Management Facilities*) is provided as a preface to this **Volume**. The Permit Application Text provided in **Volume I** addresses the applicable requirements of 19.15.36 NMAC, by restating each requirement (**in bold**) followed by the appropriate response (*in italics*).

The Facility Management Plans provided in **Volume II** address the operation and closure of storage tanks, evaporation ponds, solid waste landfill and supporting infrastructure (i.e., stormwater drainage). Design data and supporting calculations in accordance with the applicable sections of 19.15.36 NMAC are presented in **Volume III**. **Volume IV** of this Application provides the results of focused site characterization and hydrogeological investigations for the entire 562 acre \pm site.

In many cases, the technical response to a particular item is so sufficiently detailed or complex that a separate graphic, table, report, plan, or calculation has been prepared. The applicable technical documents in this Application are cross-referenced in the narrative responses to each of the individual regulatory requirements as delineated in **Volume I**. Each section of each volume also includes, as applicable:

- Table of Contents
- List of Figures
- List of Tables
- List of Attachments

The Table of Contents for the entire four-volume Application is also included in each volume in order to assist in cross-referencing, along with the List of **Permit Plans (Table I.5)**. The four-volume Application is provided in five binders. Each binder is divided by tabs which identify the Volume and Section as referenced in the master Table of Contents.

TABLE I.5
List of Permit Plans
DNCS Environmental Solutions

| Sheet No. | Title |
|-----------|---|
| 1. | Cover Sheet and Drawing Index |
| 2. | Existing Site Conditions |
| 3. | Site Development Plan |
| 4. | Landfill Base Grading Plan |
| 5. | Landfill Final Grading Plan |
| 6. | Landfill Cross Sections |
| 7. | Landfill Completion Drainage Plan |
| 8. | Liner System and Cover Details |
| 9. | Leachate Collection System Details |
| 10. | Stormwater Drainage Details |
| 11. | Processing Area Layout |
| 12. | Evaporation Pond Details |
| 13. | Evaporation Pond and Stabilization/Solidification Area Cross Sections |
| 14. | Processing Area Cross Sections |

TABLE I.6
List of Acronyms and Definitions
DNCS Environmental Solutions

| | |
|----------------------|---|
| <i>ASTM</i> | <i>American Society for Testing and Materials</i> |
| <i>BBL</i> | <i>Barrels; 42 gallons (oil)</i> |
| <i>BLM</i> | <i>Bureau of Land Management</i> |
| <i>BTEX</i> | <i>Benzene, Toluene, Ethylbenzene, and Xylenes</i> |
| <i>C/PC</i> | <p><i>Closure/Post-Closure:</i> C/PC refers to two independent steps following completion of facility operations:</p> <ul style="list-style-type: none"> • Closure typically refers to regrading the surface and repositioning of infrastructure to accommodate the post-closure. • Post-closure care refers to maintenance and monitoring after completion of closure. |
| <i>cm/sec</i> | <i>Centimeters per second</i> |
| <i>DNCS</i> | <i>DNCS Environmental Solutions</i> |
| <i>CQA</i> | <p><i>Construction Quality Assurance:</i> CQA is the process of applying field and laboratory testing, and construction observation to confirm that environmental control systems (e.g., liners and covers) are installed according to the design, regulatory requirements, and current industry standards.</p> |
| <i>FEMA</i> | <i>Federal Emergency Management Agency</i> , which administers the Flood Insurance Rate Map (FIRM) program. |
| <i>FML</i> | <p><i>Flexible Membrane Liner (or geomembrane):</i> Geosynthetic plastic liners are the standard design for the primary (upper) containment layer of the composite liner system, which in a RCRA Subtitle D (solid waste) Landfill is underlain by a compacted clay liner (CCL) or a geosynthetic clay liner (GCL).</p> |
| <i>GCL</i> | <p><i>Geosynthetic Clay Liner:</i> These are composite materials with geotextiles (fabrics) used in conjunction with dense bentonite clays, and are commonly used as the secondary lower liner in the landfill liner system.</p> |
| <i>HDPE</i> | <p><i>High Density Polyethylene:</i> This geomembrane (plastic) is the preferred material for FML landfill liners, and is typically installed in 60 – 100 mil thicknesses. HDPE is also used for leachate collection system piping and landfill gas management systems.</p> |

| | |
|------------------------------|---|
| <i>H₂S</i> | <i>Hydrogen Sulfide</i> |
| <i>LEL</i> | <i>Lower Explosive Limit</i> is the lowest percent by volume of a mixture of explosive gases in air that will propagate a flame at 77 degrees Fahrenheit and atmospheric pressure. |
| <i>mcf</i> | <i>Thousand Cubic Feet</i> |
| <i>mg/l</i> | <i>Milligrams Per Liter</i> |
| <i>NMAC</i> | <i>New Mexico Administrative Code</i> |
| <i>NMDOT</i> | <i>New Mexico Department of Transportation:</i> The NMDOT is committed to providing safe and reliable transportation systems to the state of New Mexico. NMDOT also works closely with other state agencies on transportation related issues. |
| <i>NMPM</i> | <i>New Mexico Principal Meridian</i> |
| <i>NOI</i> | <i>Notice of Intent:</i> Application to USEPA for stormwater discharges associated with industrial activity under the NPDES program. <i>Notice of Inspection:</i> The written record of a compliance inspection by a regulatory agency. |
| <i>NORM</i> | <i>Naturally Occurring Radioactive Material</i> |
| <i>NPDES</i> | <i>National Pollutant Discharge Elimination System:</i> The federal permit program which requires point sources discharging pollutants to waters of the United States to obtain a permit. |
| <i>NRCS</i> | <i>Natural Resources Conservation Service:</i> The federal agency with local offices that provide guidance on seeding of the final cover. |
| <i>OCD</i> | <i>Oil Conservation Division;</i> a division of the New Mexico Energy, Minerals, and Natural Resources Department |
| <i>OSE</i> | <i>Office of the State Engineer</i> |
| <i>PE</i> | <i>Professional Engineer</i> |
| <i>PSL</i> | <i>Protective Soil Layer:</i> Liners typically shall have a protective cover of at least two feet of granular soil. This protective cover shall, in addition to providing physical protection for the liner, facilitate the collection of leachate in the leachate collection system. |

| | |
|---------------------|--|
| <i>PVC</i> | <i>Polyvinyl Chloride</i> |
| <i>RAI</i> | <i>Request for Additional Information;</i> typically issued by a regulatory agency to an Applicant in response to an Application. |
| <i>RCRA</i> | <i>Resource Conservation and Recovery Act;</i> the program administered by USEPA that sets national standards for solid waste management and disposal. |
| <i>SLO</i> | <i>State Land Office</i> |
| <i>SWPPP</i> | <i>Stormwater Pollution Prevention Plan:</i> Sites subject to the federal National Pollutant Discharge Elimination System (NPDES) regulations must prepare and implement a SWPPP. The Plan identifies potential pollutant sources and plans to mitigate/eliminate these sources. |
| <i>TDS</i> | <i>Total Dissolved Solids;</i> a measure of water quality |
| <i>TPH</i> | <i>Total Petroleum Hydrocarbons</i> |
| <i>USEPA</i> | <i>United States Environmental Protection Agency:</i> The federal entity responsible for administering the RCRA program. USEPA also sets national standards for air quality (NAPS) and stormwater quality (NPDES) protection. |
| <i>USGS</i> | <i>United State Geological Survey</i> |
| <i>μm</i> | <i>Micrometers</i> |
| <i>UV</i> | <i>Ultra-violet light;</i> one component of sunlight |
| <i>WQCC</i> | <i>Water Quality Control Commission (NMWQCC);</i> responsible for the protection of groundwater and surface water in New Mexico. |

19.15.36.8 SURFACE WASTE MANAGEMENT FACILITY PERMITS AND APPLICATION REQUIREMENTS:

- A. Permit required.** No person shall operate a surface waste management facility (other than a small landfarm registered pursuant to Paragraph (1) of Subsection A of 19.15.36.16 NMAC) except pursuant to and in accordance with the terms and conditions of a division-issued surface waste management facility permit.

DNCS proposes to operate a new Surface Waste Management Facility, pursuant to and in accordance with the terms and conditions of a Surface Waste Management Facility Permit issued by the Oil Conservation Division (OCD) of the New Mexico Energy, Minerals and Natural Resources Department.

- B. Permitting requirements.** Except for small landfarms registered pursuant to Paragraph (1) of Subsection A of 19.15.36.16 NMAC, new commercial or centralized facilities prior to commencement of construction, and existing commercial or centralized facilities prior to modification or permit renewal, shall be permitted by the division in accordance with the applicable requirements of Subsection C of 19.15.36.8 NMAC and 19.15.36.11 NMAC.

DNCS is requesting a new commercial Surface Waste Management Facility Permit in accordance with the applicable requirements of 19.15.36.8.C NMAC and 19.15.36.11 NMAC. The purpose of this Application is to detail the Facility design, capacity, and operational practices in accordance with the Rules. For ease of regulatory review, this Application provides the information required in applicable sections of 19.15.36 NMAC as delineated in this Volume.

- C. Application requirements for new facilities, major modifications and permit renewals.** An applicant or operator shall file an application, form C-137, for a permit for a new surface waste management facility, to modify an existing surface waste management facility or for permit renewal with the environmental bureau in the division's Santa Fe office. The application shall include:
- (1) the names and addresses of the applicant and principal officers and owners of 25 percent or more of the applicant;**

The purpose of this Application is to request a Permit for a new surface waste management facility, and to document Facility design, capacity, and proposed operational activities. The completed form C-137, provided for informational purposes, is located as the preface to this Volume. The names and addresses of the Applicant and principal officers and owners of 25 percent or more of the Applicant are listed on C-137.

- (2) a plat and topographic map showing the surface waste management facility's location in relation to governmental surveys (quarter-quarter section, township and range); highways or roads giving access to the surface waste management facility site; watercourses; fresh water sources, including wells and springs; and inhabited buildings within one mile of the site's perimeter;

*A Site Location Map that shows the DNCS Facility plotted on the most current United States Geological Survey (USGS) Quadrangle map is provided as **Figure I.1**. The Site Location Map shows the Facility and the surrounding area, and **Figure I.3** is a detailed Site Topograph. A more detailed discussion of site characteristics and land use is provided in **Volume IV.1** (Siting Criteria). A Boundary Survey of the DNCS site is provided as **Attachment I.C**.*


- (3) the names and addresses of the surface owners of the real property on which the surface waste management facility is sited and surface owners of the real property within one mile of the site's perimeter;

The owner of the real property on which the Surface Waste Management Facility is sited is:

DNCS Properties, LLC
2028 E. Hackberry Place
Chandler, AZ 85286

*DNCS Properties, LLC recently acquired the property for their use as a Surface Waste Management Facility. **Attachment I.A** (Public Notification) includes a list of the names and addresses of real surface owners of the real property within one mile of the site's perimeter based on the data available from the Lea County Assessor's Office.*

- (4) a description of the surface waste management facility with a diagram indicating the location of fences and cattle guards, and detailed construction/installation diagrams of pits, liners, dikes, piping, sprayers, tanks, roads, fences, gates, berms, pipelines crossing the surface waste management facility, buildings and chemical storage areas;

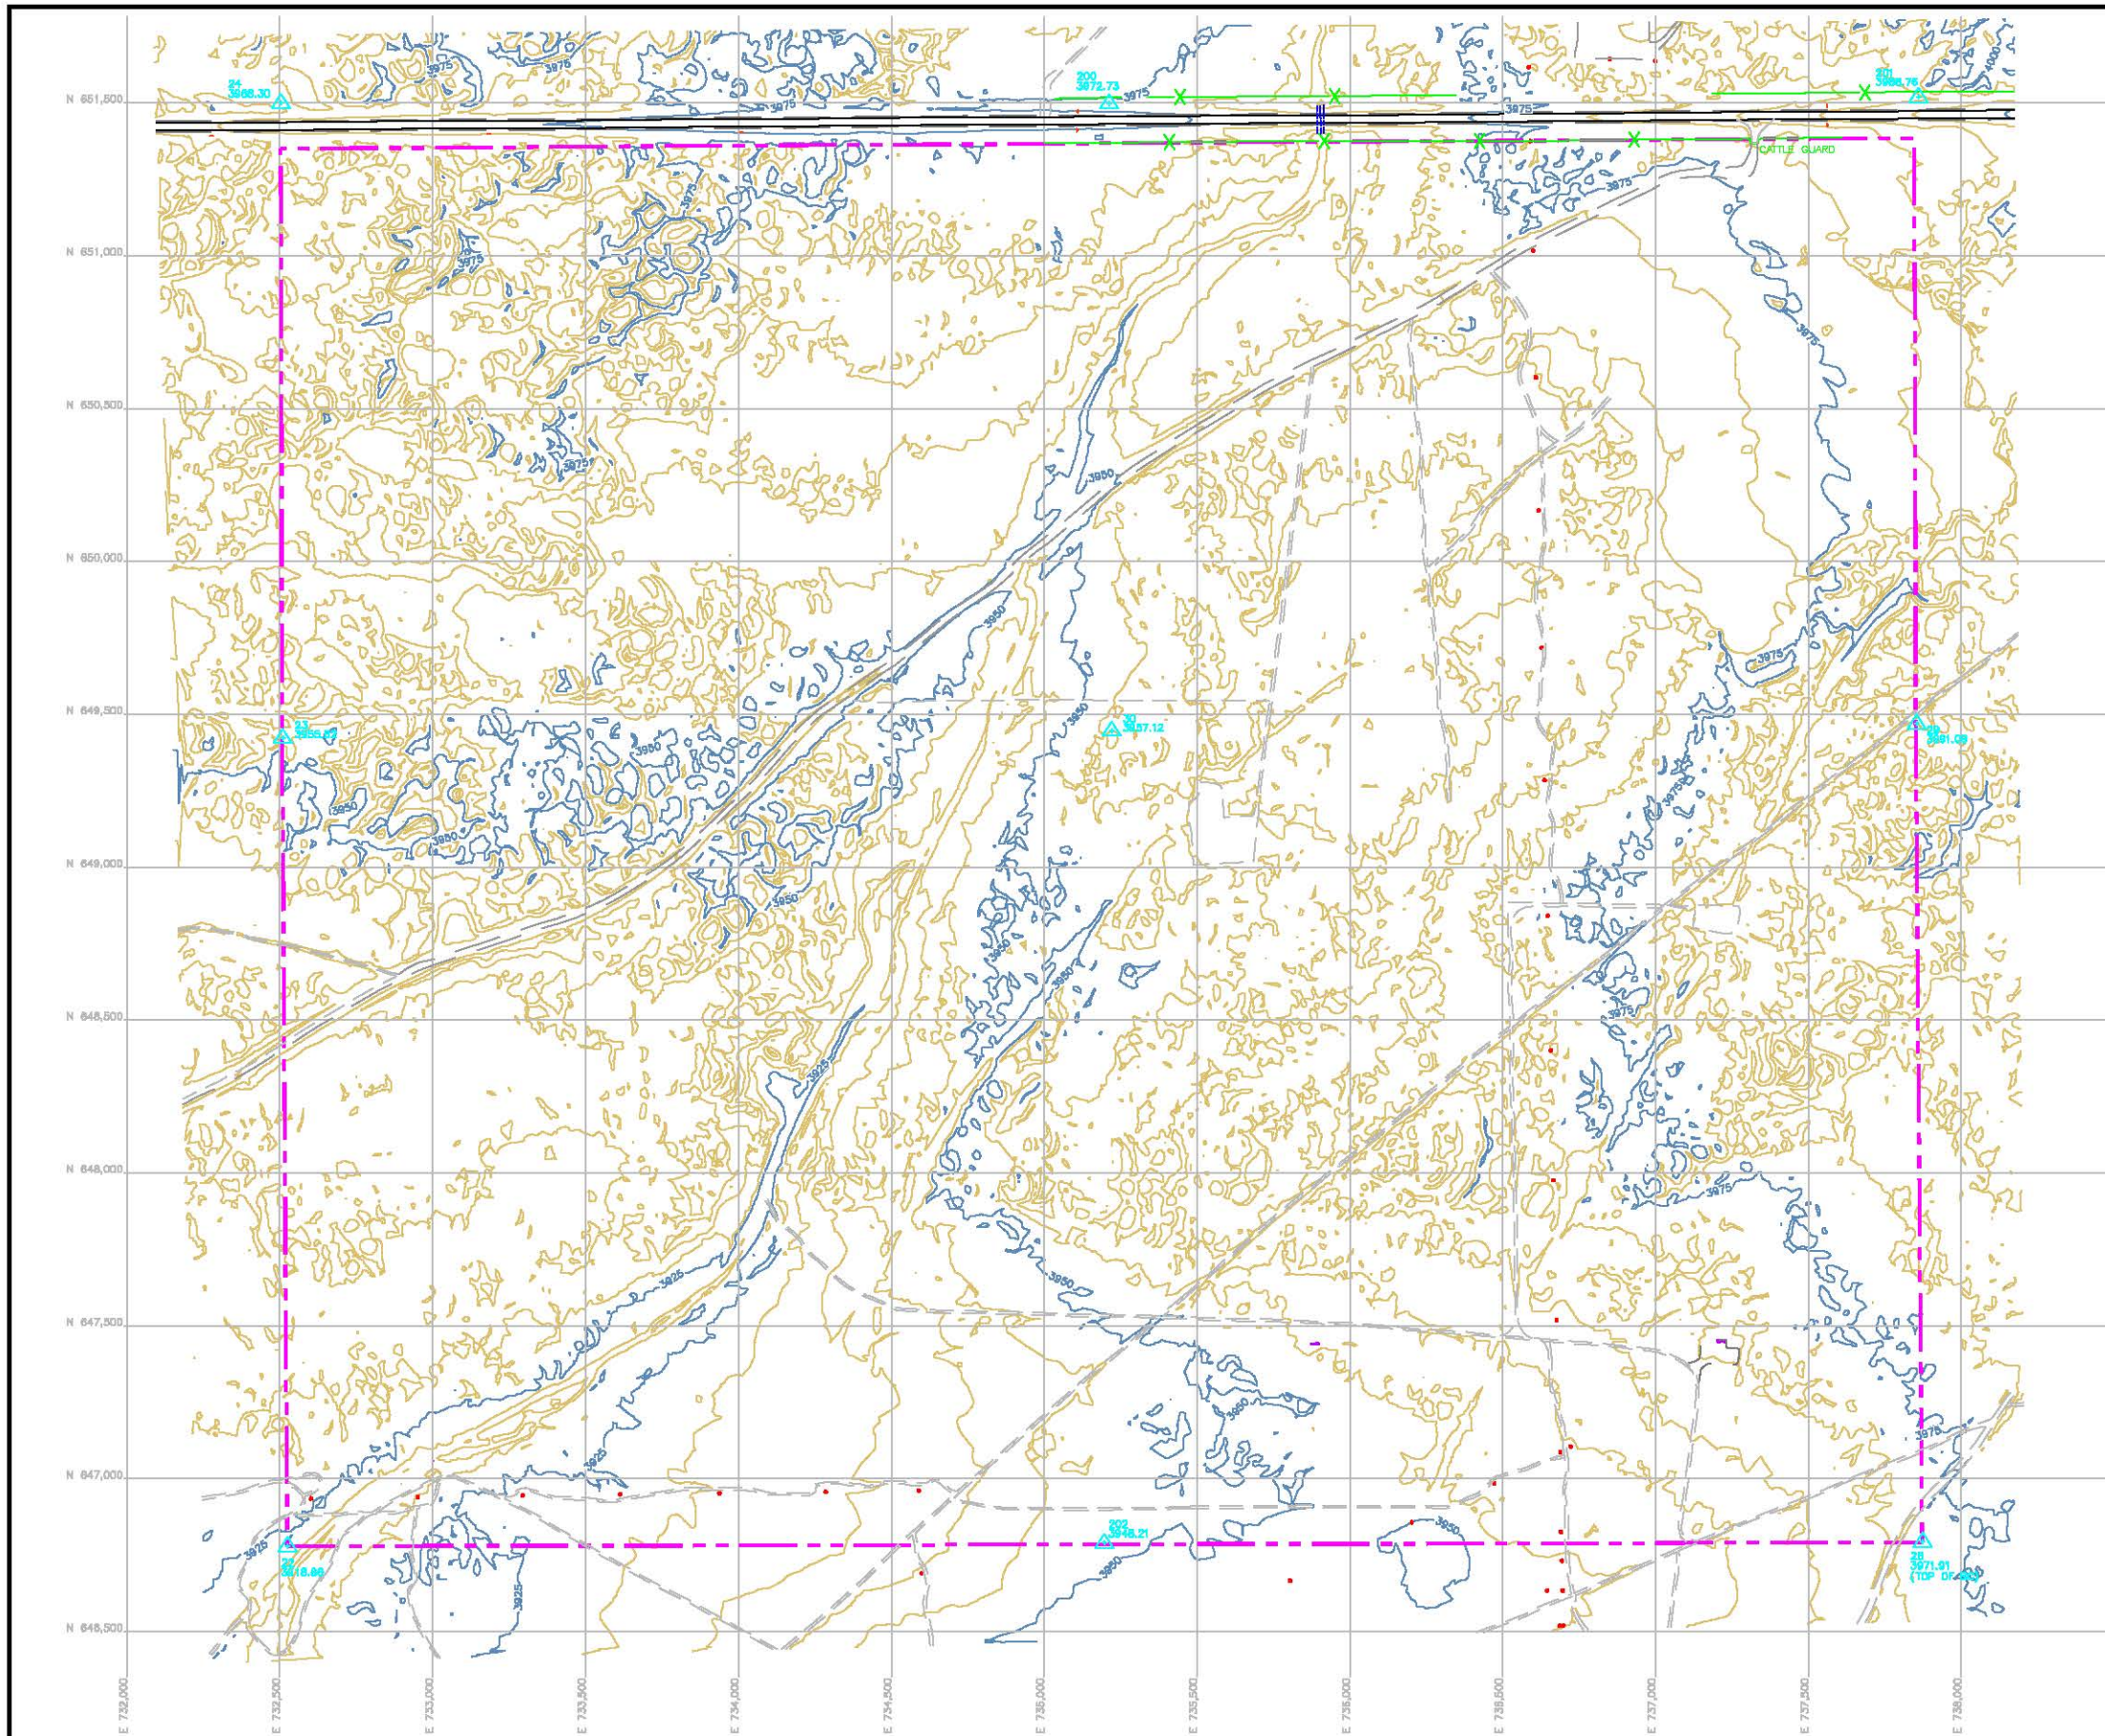

LEGEND

- SITE BOUNDARY (562 ACRES±)
- 25' TOPOGRAPHIC CONTOUR
- 5' TOPOGRAPHIC CONTOUR
- x EXISTING FENCE
- == PAVED ROAD AND SHOULDER (NM 529)
- GRAVEL ROAD/TRAIL
- POWER POLE
- ▭ CULVERTS
- ▭ CATTLE GUARD
- ROAD SIGN
- ABANDONED WELL
- ▲ SURVEY CONTROL POINT
- SITE GRID

AERIAL SURVEY BY DALLAS AERIAL SURVEYS, INC. (D.A.S.)
MAPPING AND SURVEYING
10220 Forest Lane
Dallas, Texas 75243
(214)349-2200 (800)862-2190
(214)349-2193 Fax
www.dasmaps.com
D.A.S. JOB No. 13113
DATE OF PHOTOGRAPHY: 02-28-2013



SITE TOPOGRAPHY

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8880
Fax: 505-887-8881

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 10/11/2013 | CAD: SITE TOPO.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE I.3 |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

*Volume III.1 (Engineering Design) includes a set of **Permit Plans** which are listed on **Table I.4**. The **Permit Plans, Sheet 3** (Site Development Plan) indicates the location of roads, pipeline crossings, fences and gates. The **Permit Plans, Sheet 8** provides construction and installation details on the landfill liner, and **Sheet 9** provides these details for the leachate collection system. Layout details for the processing area, which includes the produced water loadout tank farm, ponds, tanks, jet out pit and stabilization/solidification area is depicted on the **Permit Plans, Sheet 11** (Processing Area Layout); with additional details provided on **Sheet 14** (Process Layout Cross Sections). The **Permit Plans, Sheet 12** provides construction and installation details for the evaporation ponds including the mechanical evaporator locations.*

- (5) engineering designs, certified by a registered professional engineer, including technical data on the design elements of each applicable treatment, remediation and disposal method and detailed designs of surface impoundments;**

*The **Permit Plans** included in **Volume III.1** are provided at a reduced scale and establish the engineering design criteria for the Facility. The same drawings are submitted to the OCD with this Application as a full-size (24 x 36-inch) plan set. The List of **Permit Plans** is provided with the master Table of Contents and included as **Table I.4**. These **Permit Plans**, and the Certification Statement that prefaces this volume, have been signed and sealed by a Professional Engineer registered in the State of New Mexico. That engineer, who is a specialist in geotechnical engineering and waste containment design, is identified as follows:*

*I. Keith Gordon, P.E.
New Mexico Professional Engineer #10984
Principal, Gordon Environmental, Inc.
213 South Camino del Pueblo
Bernalillo, NM 87004
(505) 867-6990 Phone
(505) 867-6991 Fax*

- (6) a plan for management of approved oil field wastes that complies with the applicable requirements contained in 19.15.36.13 NMAC, 19.15.36.14 NMAC, 19.15.36.15 NMAC and 19.15.36.17 NMAC;**

*The Oil Field Waste Management Plan included as **Volume II.2** provides the applicable information required in 19.15.36.13.A through H, 19.15.36.14, 19.15.35.15, and 19.15.36.17 NMAC.*

- (7) an inspection and maintenance plan that complies with the requirements contained in Subsection L of 19.15.36.13 NMAC;**

*The Operations, Inspection, and Maintenance Plan included as **Volume II.1** provides the applicable information required in 19.15.36.13.L.(1) and (3).*

- (8) a hydrogen sulfide prevention and contingency plan that complies with those provisions of 19.15.11 NMAC that apply to surface waste management facilities;**

*The Hydrogen Sulfide Prevention and Contingency Plan included as **Volume II.3** provides information to ensure that the regulatory thresholds in 19.15.11 NMAC are not exceeded. In addition, the Contingency Plan provided as **Volume II.5** addresses the requirements of 19.15.36.13.N NMAC concerning contingencies to minimize hazards to fresh water, public health, safety or the environment.*

- (9) a closure and post closure plan, including a responsible third party contractor's cost estimate, sufficient to close the surface waste management facility in a manner that will protect fresh water, public health, safety and the environment (the closure and post closure plan shall comply with the requirements contained in Subsection D of 19.15.36.18 NMAC);**

*The Closure/Post-closure (C/PC) Plan is provided as **Volume II.4**. The C/PC Plan addresses the information required in this section as well as 19.15.36.18.D NMAC; and provides the estimated third-party C/PC cost estimate (**Attachment II.4.A**) to address the requirements in this section.*

- (10) a contingency plan that complies with the requirements of Subsection N of 19.15.36.13 NMAC and with NMSA 1978, Sections 12-12-1 through 12-12-30, as amended;**

*A Contingency Plan written in compliance with 19.15.36.13.N NMAC and the NMSA 1978 as referenced, is provided as **Volume II.5**.*

- (11) **a plan to control run-on water onto the site and run-off water from the site that complies with the requirements of Subsection M of 19.15.36.13 NMAC;**

Volume III.1 provides the design for berms, conveyance channels, and detention ponds to control run-on/run-off during the peak discharge from a 25-year, 24-hour storm; and Volume III.3 provides the supporting calculations. The DNCS Facility will not be required to obtain a permit under the Multi-Sector General Permit for Stormwater Discharges promulgated September 29, 2008 since the operation is situated within a closed basin. DNCS through adherence to the Operations, Inspection, and Maintenance Plan (Volume II.1) and construction of the detention structures described in this Application (Volume III.1), will prevent discharge of pollutants to the waters of the State or United States in violation of state water quality standards.

- (12) **in the case of an application to permit a new or expanded landfill, a leachate management plan that describes the anticipated amount of leachate that will be generated and the leachate's handling, storage, treatment and disposal, including final post closure options;**

The Leachate Management Plan included as Volume II.9 provides details including the anticipated volume of leachate that will be generated; and the leachate handling, storage, treatment and disposal technologies that will be employed during operations and final post-closure management options. Leachate management details are also described in Volume II.1 as well as the Permit Plans.

- (13) **in the case of an application to permit a new or expanded landfill, a gas safety management plan that complies with the requirements of Subsection O of 19.15.36.13 NMAC;**

In compliance with 19.15.36.13.O NMAC, landfill gas safety management is addressed in Section 6.6 of Volume II.1. The Hydrogen Sulfide (H₂S) Prevention and Contingency Plan is provided as Volume II.3.

- (14) **a best management practice plan to ensure protection of fresh water, public health, safety and the environment;**

Best management practices to ensure the protection of fresh water, public health, safety, and the environment, are described in detail in the Operations, Inspection, and Maintenance Plan (Volume II.1) as well as on the Permit Plans.

(15) geological/hydrological data including:

The DNCS site is located in a hydrogeologic setting that is ideally selected for waste processing and disposal. The absence of shallow groundwater (i.e., > 150 feet (ft) below ground surface) and the presence of a significant aquitard (i.e., the red bed formation consisting of the Chinle) minimize the potential for groundwater contamination. Regional and site-specific hydrogeologic data are presented in Volume IV.2 (Hydrogeology). Gordon Environmental, Inc. (GEI) conducted three hydrogeologic site investigations in February 2012, February 2013, and May 2013. These investigations are described in Volume IV.2.

(a) a map showing names and location of streams, springs or other watercourses, and water wells within one mile of the site;

The USGS Quadrangle Map provided as Figure I.1 identifies streams, springs, and watercourses with the vicinity of the DNCS Facility. In addition, wells within the vicinity are identified on the Water Well Location Map provided as Figure IV.1.6. This map is based on data from the NM Office of the State Engineer. The closest well is a livestock well, approximately 2,250 ft north of the DNCS site boundary.

(b) laboratory analyses, performed by an independent commercial laboratory, for major cations and anions; BTEX; RCRA metals; and TDS of ground water samples of the shallowest fresh water aquifer beneath the proposed site;

As described in Volume IV.2, no shallow water was encountered in any of the six borings installed during the February 2012, February 2013 and May 2013 drilling programs. Therefore, no laboratory analyses were performed.

(c) depth to, formation name, type and thickness of the shallowest fresh water aquifer;

*The Santa Rosa Sandstone is considered to be the shallowest fresh water aquifer in the vicinity of the DNCS site at a depth of approximately 550 ft below grade. A detailed description of this aquifer, including depth and thickness, is provided in **Volume IV.2**.*

- (d) soil types beneath the proposed surface waste management facility, including a lithologic description of soil and rock members from ground surface down to the top of the shallowest fresh water aquifer;**

*A summary of the soil data obtained during GEI's site investigations is provided in **Table IV.2.2**. This table summarizes the standard engineering index properties (i.e., USCS soil classification; grain size distribution; natural dry density, Atterberg limits; and gravimetric moisture content) for selected soil samples obtained during the drilling program at DNCS. **Table IV.2.2** also summarizes lab test results for Standard Proctor density and permeability. The soils laboratory testing was conducted in accordance with guidance provided by OCD. The site geology is described in detail in **Volume IV.2** including lithologic descriptions of the soil borings installed at the site.*

- (e) geologic cross-sections;**

*A geologic cross-section of the site is provided as **Figures IV.2.8**, including a site map identifying the locations of the geological cross-section (**Figure IV.2.7**). These cross-sections are discussed in **Volume IV.2**.*

- (f) potentiometric maps for the shallowest fresh water aquifer; and**

*Potentiometric groundwater surface data for the Santa Rosa Sandstone is not available, mainly due to wide spacing of data representing only Santa Rosa Sandstone completed wells, poor drill logs and inconsistencies in the definition of the Santa Rosa Sandstone. The geometry of land surface and underlying geologic units, as well as groundwater saturations in the vicinity of the DNCS site are depicted in the hydrogeologic cross-section shown on **Figure IV.2.8**. This diagram indicates that no shallow alluvial groundwater is present at the DNCS site, consistent with site-specific drilling results. Based upon information projected from nearby petroleum wells, the shallowest potential water-bearing zone is the Santa Rosa Sandstone (lower Triassic Chinle; **Figure IV.2.11**), which is approximately 550 ft below grade at the DNCS site.*

- (g) **porosity, permeability, conductivity, compaction ratios and swelling characteristics for the sediments on which the contaminated soils will be placed;**

*A detailed description of porosity, permeability, conductivity, compaction ratios, and swelling characteristics is provided in **Volume IV.2**. The calculated porosities and permeabilities are summarized in **Table IV.2.2**. **Table IV.2.2** also summarizes the standard proctor densities and optimum moistures; and summarizes the swell/collapse characteristics of the onsite soils.*

- (16) **certification by the applicant that information submitted in the application is true, accurate and complete to the best of the applicant's knowledge, after reasonable inquiry; and**

*The certification is located in the preface to this **Volume** of the Application (i.e., Form C-137).*

- (17) **other information that the division may require to demonstrate that the surface waste management facility's operation will not adversely impact fresh water, public health, safety or the environment and that the surface waste management facility will comply with division rules and orders.**

DNCS will provide other applicable information reasonably requested by the OCD in order to demonstrate that the surface waste management facility's operation will not adversely impact fresh water, public health, safety or the environment. In addition, DNCS will comply with applicable Rules and Orders issued by OCD.

D. Application requirements for minor modifications. An existing surface waste management facility applying for a minor modification shall file a form C-137 with the environmental bureau in the division's Santa Fe office describing the proposed change and identifying information that has changed from its last C-137 filing.

At this time, DNCS is not seeking a minor modification. DNCS will comply with this requirement when applicable.

- E. Determination that an application is administratively complete. Upon receipt of an application for a surface waste management facility permit or modification or renewal of an existing surface waste management facility permit, the division shall review the application for administrative completeness. To be deemed administratively complete, the application shall provide information required by Subsection C or D (as applicable) of 19.15.36.8 NMAC. The division shall notify the applicant in writing when it deems the application administratively complete. If the division determines that the application is not administratively complete, the division shall notify the applicant of the deficiencies in writing within 30 days after the application's receipt and state what additional information is necessary.**

No response required.

19.15.36.9 NOTICE REQUIREMENTS FOR NEW SURFACE WASTE MANAGEMENT FACILITIES, MAJOR MODIFICATIONS OR RENEWALS AND ISSUANCE OF A TENTATIVE DECISION:

- A. Upon receipt of notification of the division's determination that the application is administratively complete, the applicant for a new surface waste management facility permit, permit renewal or major modification shall give written notice of the application, by certified mail, return receipt requested, to the surface owners of record within one-half mile of the surface waste management facility, the county commission of the county where the surface waste management facility site is located, the appropriate city officials if the surface waste management facility site is within city limits or within one-half mile of the city limits, and affected federal, tribal or pueblo governmental agencies. The notice shall contain the information in Paragraphs (1) through (4) of Subsection F of 19.15.36.9 NMAC. The division may extend the distance requirements for notice if the division determines that the proposed surface waste management facility has the potential to adversely impact fresh water, public health, safety or the environment at a distance greater than one-half mile. The applicant shall furnish proof that it has given the required notices.**

Draft Public Notification language is provided in Attachment I.A. The Draft Public Notification was prepared in accordance with 19.15.36.9.F(1) through (4) NMAC. Following OCD approval, Public Notification will be provided in compliance with 19.15.36.9.A NMAC, to the surface owners of record located within one-half mile of the Facility. Owners of record, as determined by the Lea County Assessor's Office, are listed in Attachment I.A, and include the State Land Office (SLO) and Bureau of Land Management (BLM). Additionally, the Public Notification will be provided to the Lea County Commission. The Facility is not located within

one-half mile of any city limit and therefore no additional federal, tribal or pueblo governmental agencies are affected.

- B. The division shall distribute notice of its determination that an application for a new surface waste management facility or for a renewal or major modification of an existing surface waste management facility is administratively complete to persons who have requested notification of division and commission hearing dockets within 30 days following the date that the division determines the application to be administratively complete.**

No response required.

- C. A person wishing to comment on an application prior to the division's preliminary consideration of the application may file comments within 30 days, or as extended by the director, after the later of the date when the applicant mails the notice required by Subsection A of 19.15.36.9 NMAC or the date when the division distributes the notice provided in Subsection B of 19.5.36.9 NMAC.**

No response required

- D. Within 60 days after the end of the public comment period provided in Subsection C of 19.15.36.9 NMAC, the division shall issue a tentative decision concerning the application, renewal or modification, including proposed conditions for approval or reasons for disapproval, as applicable. The division shall mail notice of the tentative decision, together with a copy of the decision, by certified mail, return receipt requested, to the applicant and shall post notice on the division's website, together with a copy of the tentative decision.**

No response required

- E. Within 30 days after receiving the division's tentative decision, the applicant shall provide notice of the tentative decision by:**
- (1) publishing a display ad in English and Spanish, in a form approved by the division, in a newspaper of general circulation in this state and in a newspaper of general circulation in the county where the surface waste management facility is or will be located; the display ad shall be at least three inches by four inches and shall not be published in the newspaper's legal or classified sections;**
 - (2) mailing notice by first class mail or e-mail to persons, as identified to the applicant by the division, who have requested notification of applications generally, or of the particular application, including persons who have filed comments on the particular application during the initial public comment period, and who have included in such comments a legible return address or e-mail address; and**

- (3) mailing notice by first class or e-mail to affected local, state, federal or tribal governmental agencies, as determined and identified to the applicant by the division.

DNCS will comply with the notification requirements identified in 19.15.39.9.E NMAC. It is proposed that the display ad be published in the Albuquerque Journal and the Hobbs News-Sun, both of which are newspapers in general circulation in the State of New Mexico and Lea County.

F. This notice issued pursuant to Subsection E of 19.15.36.9 NMAC shall include:

- (1) the applicant's name and address;
- (2) the surface waste management facility's location, including a street address if available, and sufficient information to locate the surface waste management facility with reference to surrounding roads and landmarks;
- (3) a brief description of the proposed surface waste management facility;
- (4) the depth to, and TDS concentration of, the ground water in the shallowest aquifer beneath the surface waste management facility site;
- (5) a statement that the division's tentative decision is available on the division's website, or, upon request, from the division clerk, including the division clerk's name, address and telephone number;
- (6) a description of alternatives, exceptions or waivers that may be under consideration in accordance with Subsection G of 19.15.36.18 NMAC or 19.15.36.19 NMAC;
- (7) a statement of the comment period and of the procedures for requesting a hearing on the application; and
- (8) a brief statement of the procedures the division shall follow in making a final decision.

DNCS will, upon receiving OCD's tentative decision, issue Public Notification in compliance with this section.

19.15.36.10 COMMENTS AND HEARING ON APPLICATION:

- A. A person, whether or not such person has previously submitted comments, may file comments or request a hearing on the application by filing their comments or, in accordance with 19.15.4.9 NMAC, a hearing request with the division clerk within 30 days after the date that the applicant issued public notice of the division's tentative decision. A request for a hearing shall be in writing and shall state specifically the reasons why a hearing should be held. The division shall schedule a public hearing on the application if, in addition to the requirements in 19.15.4.9 NMAC:

- (1) the division has proposed to deny the application or grant it subject to conditions not expressly required by rule, and the applicant requests a hearing;
 - (2) the director determines that there is significant public interest in the application;
 - (3) the director determines that comments have raised objections that have probable technical merit; or
 - (4) determination of the application requires that the division make a finding, pursuant to Paragraph (3) of Subsection F of 19.15.2.7 NMAC, whether a water source has a present or reasonably foreseeable beneficial use that contamination would impair.
- B. If the division schedules a hearing on an application, the hearing shall be conducted according to 19.15.14.1206 through 19.15.14.1215 NMAC.

No response required.

19.15.36.11 FINANCIAL ASSURANCE REQUIREMENTS:

- A. **Centralized facilities.** Upon notification by the division that it has approved a permit but prior to the division issuing the permit, an applicant for a new centralized facility permit shall submit acceptable financial assurance in the amount of \$25,000 per centralized facility, or a statewide “blanket” financial assurance in the amount of \$50,000 to cover all of that applicant’s centralized facilities, unless such applicant has previously posted a blanket financial assurance for centralized facilities.

No response required, as DNCS is a proposed “Commercial Facility” per 19.15.36.7.A(2) NMAC.

- B. **New commercial facilities or major modifications of existing commercial facilities.** Upon notification by the division that it has approved a permit for a new commercial facility or a major modification of an existing commercial facility but prior to the division issuing the permit, the applicant shall submit acceptable financial assurance in the amount of the commercial facility’s estimated closure and post closure cost, or \$25,000, whichever is greater. The commercial facility’s estimated closure and post closure cost shall be the amount provided in the closure plan the applicant submitted unless the division determines that such estimate does not reflect a reasonable and probable closure and post closure cost, in which event, the division shall determine the estimated closure and post closure cost and shall include such determination in its tentative decision. If the applicant disagrees with the division’s determination of estimated closure and post closure cost, the applicant may request a hearing as provided in 19.15.36.10 NMAC. If the applicant so requests, and no other person files a request for a hearing regarding

the application, the hearing shall be limited to determination of estimated closure and post closure cost.

*Once OCD has approved the DNCS Application for Permit, DNCS will submit financial assurance for \$1,088,352, as detailed in the C/PC Cost Estimate Tables provided as **Attachment II.4.A**. The C/PC Cost Estimate will be reviewed prior to issuance of the Permit, and also prior to each new Phase of site development (see **Table I.4**). This amount represents the closure costs and post closure care requirements that will be required for Phase I of the development.*

- C. Terms of financial assurance.** The financial assurance shall be on division-prescribed forms, payable to the state of New Mexico and conditioned upon the surface waste management facility's proper operation, site closure and post closure monitoring in compliance with state of New Mexico statutes, division rules and the surface waste management facility permit terms. The applicant shall notify the division of a material change affecting the financial assurance within 30 days of discovery of such change.

DNCS will comply with this requirement.

- D. Forfeiture of financial assurance.** The division shall give the operator 20 days notice and an opportunity for a hearing prior to forfeiting financial assurance.

No response required.

- E. Forms of financial assurance.** The division may accept the following forms of financial assurance.

- (1) Surety bonds.** A surety bond shall be executed by the applicant and by a corporate surety licensed to do business in the state, and shall be non-cancelable.
- (2) Letters of credit.** A letter of credit shall be issued by a bank organized or authorized to do commercial banking business in the United States, shall be irrevocable for a term of not less than five years and shall provide for automatic renewal for successive, like terms upon expiration, unless the issuer has notified the division in writing of non-renewal at least 90 days before its expiration date. The letter of credit shall be payable to the state of New Mexico in part or in full upon receipt from the director or the director's authorized representative of demand for payment accompanied by a notice of forfeiture.

- (3) **Cash accounts.** An applicant may provide financial assurance in the form of a federally insured or equivalently protected cash account or accounts in a financial institution, provided that the operator and the financial institution shall execute as to each such account a collateral assignment of the account to the division, which shall provide that only the division may authorize withdrawals from the account. In the event of forfeiture pursuant to Subsection C of 19.15.36.18 NMAC, the division may, at any time and from time to time, direct payment of all or part of the balance of such account (excluding interest accrued on the account) to itself or its designee for the surface waste management facility's closure.

*Once the Permit is approved, DNCS will elect a financial assurance mechanism pursuant to 19.15.36.11.E NMAC. Documentation will be included in **Attachment I.B** once OCD approves the Application for Permit. The amount of the mechanism will represent the closure costs and post-closure care requirements that will be required for Phase I of the development, as identified in the C/PC Cost Estimate Summary provided as **Attachment II.4.A**. The C/PC Cost Estimate will be reviewed prior to issuance of the Permit, and also prior to each new Phase of site development (see **Table I.4**).*

F. Replacement of financial assurance.

- (1) **The division may allow an operator to replace existing forms of financial assurance with other forms of financial assurance that provide equivalent coverage.**
- (2) **The division shall not release existing financial assurance until the operator has submitted, and the division has approved, an acceptable replacement.**

DNCS will comply with this requirement.

- G. Review of adequacy of financial assurance.** The division may at any time not less than five years after initial acceptance of financial assurance for a commercial facility, or whenever the operator applies for a major modification of the commercial facility's permit, initiate a review of such financial assurance's adequacy. Additionally, whenever the division determines that a landfarm operator has not achieved the closure standards specified in Paragraph (3) of Subsection G of 19.15.36.15 NMAC, the division may review the adequacy of the landfarm operator's financial assurance, without regard to the date of its last review. Upon determination, after notice to the operator and an opportunity for a hearing, that the financial assurance is not adequate to cover the reasonable and probable cost of a commercial facility's closure and post closure monitoring, the

division may require the operator to furnish additional financial assurance sufficient to cover such reasonable and probable cost, provided that the financial assurance required of a commercial facility permitted prior to the effective date of 19.15.36 NMAC shall not exceed \$250,000 except in the event of a major modification of the commercial facility. If such a commercial facility applies for a major modification, the division shall determine the applicable financial assurance requirement based on the total estimated closure and post closure cost of the commercial facility as modified, without regard to the \$250,000 limit.

DNCS will comply with this requirement.

19.15.36.12 PERMIT APPROVAL, DENIAL, REVOCATION, SUSPENSION, MODIFICATION OR TRANSFER:

A. Granting of permit.

- (1) The division may issue a permit for an new surface waste management facility or major modification upon finding that an acceptable application has been filed, that the conditions of 19.15.36.9 NMAC and 19.15.36.11 NMAC have been met and that the surface waste management facility or modification can be constructed and operated in compliance with applicable statutes and rules and without endangering fresh water, public health, safety or the environment.**

DNCS will comply with the public notice requirements of 19.15.36.9 NMAC and the financial assurance requirements of 19.15.36.11 NMAC, as necessary to achieve Permit approval. Attachment I.A includes the current list of property owners within one-half mile of the Facility, which will be updated prior to formal notice. Following OCD review and approval of the Application, DNCS will distribute the public notice in accordance with 19.15.36.9 NMAC. Attachment I.B provides the proposed C/PC Cost Estimate that will be the basis for the financial assurance mechanism to be put into place in accordance with 19.15.36.11 NMAC upon approval of the Permit. This Application provides the required plans and engineering calculations to construct and operate the Facility in compliance with applicable statutes and Rules that ensure fresh water, public health, safety, or the environment will be protected.

- (2) Each permit the division issues for a new surface waste management facility shall remain in effect for 10 years from the date of its issuance. If the division grants a permit for a major modification of a surface waste management facility, the permit for that surface waste management facility shall remain in effect for 10 years from the date the division approves the major modification.

This Application requests a Permit in accordance with 19.15.36.8 NMAC. A new Application for Permit Renewal will be submittal to OCD at least 120 days prior to the expiration of the Permit granted in response to this Application (i.e., 10 years).

- (a) A surface waste management facility permit may be renewed for successive 10-year terms. If the holder of a surface waste management facility permit submits an application for permit renewal at least 120 days before the surface waste management facility permit expires, and the operator is not in violation of the surface waste management facility permit on the date of its expiration, then the existing surface waste management facility permit for the same activity shall not expire until the division has approved or denied an application for renewal. If the division has not notified the operator of a violation, if the operator is diligently pursuing procedures to contest a violation or if the operator and the division have signed an agreed compliance order providing for remedying the violation, then the surface waste management facility permit shall continue in effect as above provided notwithstanding the surface waste management facility permit violation's existence. A surface waste management facility permit continued under this provision remains fully effective and enforceable.

This Application requests a Permit in accordance with 19.15.36.8 NMAC.

- (b) An application for permit renewal shall include and adequately address the information necessary for evaluation of a new surface waste management facility permit as provided in Subsection C of 19.15.36.8 NMAC. Previously submitted materials may be included by reference provided they are current, readily available to the division and sufficiently identified so that the division may retrieve them.

This Application requests a Permit in accordance with 19.15.36.8 NMAC.

- (c) **The operator shall give public notice of the renewal application in the manner prescribed by 19.15.36.9 NMAC. The division shall grant an application for renewal if the division finds that an acceptable application has been filed, that the conditions of 19.15.36.9 NMAC and 19.15.36.11 NMAC have been met and that the surface waste management facility can be operated in compliance with applicable statutes and rules and without endangering fresh water, public health, safety or the environment.**

DNCS will continue to comply with the public notice requirements of 19.15.36.9 NMAC and the financial assurance requirements of 19.15.36.11 NMAC, as necessary to achieve Permit renewal. This Application provides the required plans and engineering calculations to construct and operate the Facility in compliance with applicable statutes and Rules that ensure fresh water, public health, safety, and the environment will be protected.

- (3) **The division shall review each surface waste management facility permit at least once during the 10-year term, and shall review surface waste management facility permits to which Paragraph (2) of Subsection A of 19.15.36.12 NMAC does not apply at least every five years. The review shall address the operation, compliance history, financial assurance and technical requirements for the surface waste management facility. The division, after notice to the operator and an opportunity for a hearing, may require appropriate modifications of the surface waste management facility permit, including modifications necessary to make the surface waste management facility permit terms and conditions consistent with statutes, rules or judicial decisions.**

DNCS will make available all necessary operational, compliance, financial assurance and other technical documents to OCD at any time during the 10 year permit period for the completion of a mid-term review. DNCS will respond to OCD requests for updates to address changes in regulatory standards.

- B. Denial of permit. The division may deny an application for a surface waste management facility permit or modification of a surface waste management facility permit if it finds that the proposed surface waste management facility or modification may be detrimental to fresh water, public health, safety or the environment. The division may also deny an application for a surface waste management facility permit if the applicant, an owner of 25 percent or greater interest in the applicant or an affiliate of the applicant has a history of failure to comply with division rules and orders or state or federal environmental laws; is subject to a division or commission order, issued after notice and hearing, finding**

such entity to be in violation of an order requiring corrective action; or has a penalty assessment for violation of division or commission rules or orders that is unpaid more than 70 days after issuance of the order assessing the penalty. An affiliate of an applicant, for purposes of Subsection B of 19.15.36.12 NMAC, shall be a person who controls, is controlled by or under is common control with the applicant or a 25 percent or greater owner of the applicant.

No response required.

- C. Additional requirements.** The division may impose conditions or requirements, in addition to the operational requirements set forth in 19.15.36 NMAC, that it determines are necessary and proper for the protection of fresh water, public health, safety or the environment. The division shall incorporate such additional conditions or requirements into the surface waste management facility permit.

DNCS will comply with any additional requirements or conditions imposed by OCD intended to protect fresh water, public health, safety or the environment, and comply with any applicable permit conditions.

- D. Revocation, suspension or modification of a permit.** The division may revoke, suspend or impose additional operating conditions or limitations on a surface waste management facility permit at any time, for good cause, after notice to the operator and an opportunity for a hearing. The division may suspend a surface waste management facility permit or impose additional conditions or limitations in an emergency to forestall an imminent threat to fresh water, public health, safety or the environment, subject to the provisions of NMSA 1978, Section 70-2-23, as amended. If the division initiates a major modification it shall provide notice in accordance with 19.15.36.9 NMAC. Suspension of a surface waste management facility permit may be for a fixed period of time or until the operator remedies the violation or potential violation. If the division suspends a surface waste management facility's permit, the surface waste management facility shall not accept oil field waste during the suspension period.

No response required.

- E. Transfer of a permit.** The operator shall not transfer a permit without the division's prior written approval. A request for transfer of a permit shall identify officers, directors and owners of 25 percent or greater in the transferee. Unless the director otherwise orders, public notice or hearing are not required for the transfer request's approval. If the division denies the transfer request, it shall notify the operator and the proposed transferee of the denial by certified mail, return receipt requested, and either the operator or the proposed transferee may request a hearing with 10 days after receipt of the notice. Until the division

approves the transfer and the required financial assurance is in place, the division shall not release the transferor's financial assurance.

DNCS will comply with this requirement.

19.15.36.13 SITING AND OPERATIONAL REQUIREMENTS APPLICABLE TO ALL PERMITTED SURFACE WASTE MANAGEMENT FACILITIES: EXCEPT AS OTHERWISE PROVIDED IN 19.15.36 NMAC.

*Siting documentation is detailed in **Volume IV.1** to demonstrate that the operation of the Facility will protect public health and the environment. This section confirms the remote location, absence of any residential housing within over one mile of the Facility boundary, absence of churches, schools, parks or other unrelated business in the area. With open pasture and oil field production facilities surrounding the DNCS Facility, the location is ideally suited for development as a surface waste management facility.*

A. Depth to ground water.

- (1) No landfill shall be located where ground water is less than 100 feet below the lowest elevation of the design depth at which the operator will place oil field waste.**

*Groundwater is demonstrated to be more than 100 ft below the lowest elevation of the design depth of the landfill where oil field waste will be placed. Additional detail is provided in **Volume IV.1** (Siting) and in **Volume IV.2** (Hydrogeology).*

- (2) No landfarm that accepts soil or drill cuttings with a chloride concentration that exceeds 500 mg/kg shall be located where ground water is less than 100 feet below the lowest elevation at which the operator will place oil field waste. See Subsection A of 19.15.36.15 NMAC for oil field waste acceptance criteria.**

Not Applicable. DNCS does not propose to operate a landfarm permitted under 19.15.36.15 NMAC.

- (3) No landfarm that accepts soil or drill cuttings with a chloride concentration that is 500 mg/kg or less shall be located where ground water is less than 50 feet below the lowest elevation at which the operator will place oil field waste.**

Not Applicable. DNCS does not propose to operate a landfarm permitted under 19.15.36.15 NMAC.

- (4) No small landfarm shall be located where ground water is less than 50 feet below the lowest elevation at which the operator will place oil field waste.**

Not Applicable.

- (5) No other surface waste management facility shall be located where ground water is less than 50 feet below the lowest elevation at which the operator will place oil field waste.**

*Groundwater is not located less than 50 ft below the lowest elevation of the processing area where oil field waste will be placed. Additional detail is provided in **Volume IV.1** (Siting) and in **Volume IV.2** (Hydrogeology).*

B. No surface waste management facility shall be located:

- (1) within 200 feet of a watercourse, lakebed, sinkhole or playa lake;**

*The Facility is **not located within 200 feet of a watercourse, lakebed, sinkhole or playa lake.** Documentation regarding the locations of watercourses, lakebeds, sinkholes and playa lakes with respect to the DNCS site is provided in **Volume IV.1**.*

- (2) within an existing wellhead protection area or 100-year floodplain;**

*The Facility is **not located within an existing wellhead protection area or 100-year floodplain.** Documentation regarding wellhead protection areas and 100-year floodplains is provided in **Volume IV.1**.*

- (3) within, or within 500 feet of, a wetland;**

*The Facility is **not located within 500 ft of a wetland.** Documentation regarding wetlands in the vicinity of the DNCS site is provided in **Volume IV.1**.*

- (4) within the area overlying a subsurface mine;**

*The Facility is **not located in an area overlying a known subsurface mine.** Documentation of mines, mills, and quarries is provided in **Volume IV.1**.*

- (5) **within 500 feet from the nearest permanent residence, school, hospital, institution or church in existence at the time of initial application; or**

The Facility is not located within 500 ft of the nearest permanent residence, school, hospital, institution, or church. Land use setback documentation is provided in Volume IV.1.

- (6) **within an unstable area, unless the operator demonstrates that engineering measures have been incorporated into the surface waste management facility design to ensure that the surface waste management facility's integrity will not be compromised.**

As documented in Volume IV.1, the DNCS Facility is not located in an unstable area.

C. No surface waste management facility shall exceed 500 acres.

The DNCS Facility will not exceed 500 acres. Total acreage for the DNCS site is 562 ± acres. However, as described in Section I.3, a portion of the 562-acre tract is a drainage feature that will be excluded from development, as well as extensive perimeter setbacks. The drainage feature includes a 500-ft buffer zone and totals 67 acres ±. The DNCS Facility will include two main components; a liquid oil field waste Processing Area (177 acres ±), and an oil field waste Landfill (318 acres ±); therefore the DNCS Facility comprises 495 acres ±. A copy of the Boundary Survey for the DNCS site, which describes the size of the site and the site boundary is provided in Attachment I.C. Note that the Survey Description included on the Boundary Survey provides the description for the 562 acre ± DNCS Site. Table I.1 provides details regarding site facilities and acreages.

D. The operator shall not accept oil field wastes transported by motor vehicle at the surface waste management facility unless the transporter has a form C-133, authorization to move liquid waste, approved by the division.

DNCS will comply with this requirement. The Oil Field Waste Management Plan provided as Volume II.2 requires that, prior to acceptance of any liquid waste, the transporter must provide the Facility with a Division-approved Form C-133.

- E. The operator shall not place oil field waste containing free liquids in a landfill or landfarm cell. The operator shall use the paint filter test, as prescribed by the EPA (EPA SW-846, method 9095) to determine conformance of the oil field waste to this criterion.**

DNCS will comply with this requirement. The Oil Field Waste Management Plan (Volume II.2) requires that, prior to acceptance of any oil field waste in the landfill portion of the Facility, the material will pass the paint filter test. Solidification, if necessary, will be accomplished in the Mixing/Solidification Area located in the lined stabilization and solidification area and described in Operation, Inspection, and Maintenance Plan (Volume II.1).

- F. Surface waste management facilities shall accept only exempt or non-hazardous waste, except as provided in Paragraph (3) of Subsection F of 19.15.36.13 NMAC. The operator shall not accept hazardous waste at a surface waste management facility. The operator shall not accept wastes containing NORM at a surface waste management facility except as provided in 19.15.35 NMAC. The operator shall require the following documentation for accepting oil field wastes, and both the operator and the generator shall maintain and make the documentation available for division inspection.**

DNCS will comply with this requirement. The Oil Field Waste Management Plan (Volume II.2) provides a detailed description of oil field waste acceptance protocol. Included in this Plan are Form C-138 certification, certification frequency. DNCS will maintain and make documentation of this available for OCD inspection.

- (1) Exempt oil field wastes. The operator shall require a certification on form C-138, signed by the generator or the generator's authorized agent, that represents and warrants that the oil field wastes are generated from oil and gas exploration and production operations, are exempt waste and are not mixed with non-exempt waste. The operator shall have the option to accept such certifications on a monthly, weekly or per load basis. The operator shall maintain and shall make the certificates available for the division's inspection.**

DNCS will comply with this requirement. The Oil Field Waste Management Plan (Volume II.2) provides a detailed description of oil field waste acceptance protocol. Included in this Plan is the Form C-138 certification and additional documentation that the oil field waste is Resource Conservation and Recovery Act (RCRA) exempt.

- (2) **Non-exempt, non-hazardous, oil field wastes.** The operator shall require a form C-138, oil field waste document, signed by the generator or its authorized agent. This form shall be accompanied by acceptable documentation to determine that the oil field waste is nonhazardous.

DNCS will comply with this requirement. The Oil Field Waste Management Plan (Volume II.2) provides a detailed description of oil field waste acceptance protocol. Included in this Plan is the Form C-138 certification and additional documentation that any non-exempt oil field waste is non-hazardous.

- (3) **Emergency non-oil field wastes.** The operator may accept non-hazardous, non-oil field wastes in an emergency if ordered by the department of public safety. The operator shall complete a form C-138, oil field waste document, describing the waste, and maintain the same, accompanied by the department of public safety order, subject to division inspection.

DNCS will comply with this requirement.

- G. **The operator of a commercial facility shall maintain records reflecting the generator, the location of origin, the location of disposal within the commercial facility, the volume and type of oil field waste, the date of disposal and the hauling company for each load or category of oil field waste accepted at the commercial facility. The operator shall maintain such records for a period of not less than five years after the commercial facility's closure, subject to division inspection.**

DNCS will comply with this requirement. The Oil Field Waste Management Plan (Volume II.2) provides a detailed description of oil field waste acceptance recordkeeping forms. The forms in this Plan include the information required in this subsection and will be maintained and retained for a period of not less than five years following Facility closure. DNCS will make these records available for OCD inspection upon request.

- H. **Disposal at a commercial facility shall occur only when an attendant is on duty unless loads can be monitored or otherwise isolated for inspection before disposal. The surface waste management facility shall be secured to prevent unauthorized disposal.**

Disposal operations at DNCS will only be conducted when an attendant is on duty. DNCS may conduct Facility operations 24 hours a day, 7 days a week. The Facility will be secured with barbed wire fencing, cattle guards, and locking gates to prevent any unauthorized access or disposal when an attendant is not on duty.


- I. To protect migratory birds, tanks exceeding eight feet in diameter, and exposed pits and ponds shall be screened, netted or covered. Upon the operator's written application, the division may grant an exception to screening, netting or covering upon the operator's showing that an alternative method will protect migratory birds or that the surface waste management facility is not hazardous to migratory birds. Surface waste management facilities shall be fenced in a manner approved by the division.**

*DNCS herein requests an exception to 19.15.36.13.I NMAC. The Migratory Bird Protection Plan presented as **Volume II.6** describes an alternate methodology to the screening requirement of the storage ponds. This Plan describes visual inspections and migratory bird retrieval and clean-up procedures should bird(s) require decontamination. In addition, the Engineering Design (**Volume III.1**) provides a process design for produced waters and other liquids that will remove the oils present in these materials prior to discharge through the evaporation ponds.*

- J. Surface waste management facilities shall have a sign, readable from a distance of 50 feet and containing the operator's name; surface waste management facility permit or order number; surface waste management facility location by unit letter, section, township and range; and emergency telephone numbers.**

*The proposed Site Entrance Sign is provided as **Figure I.4**. The sign was designed in compliance with the requirements of 19.15.36.13.J NMAC. A 4-ft by 8-ft sign with 3-inch lettering will identify the Facility operator as DNCS, and will include the Facility permit number, location and emergency phone numbers.*

- K. The operators shall comply with the spill reporting and corrective action provisions of 19.15.30 NMAC or 19.15.29 NMAC.**

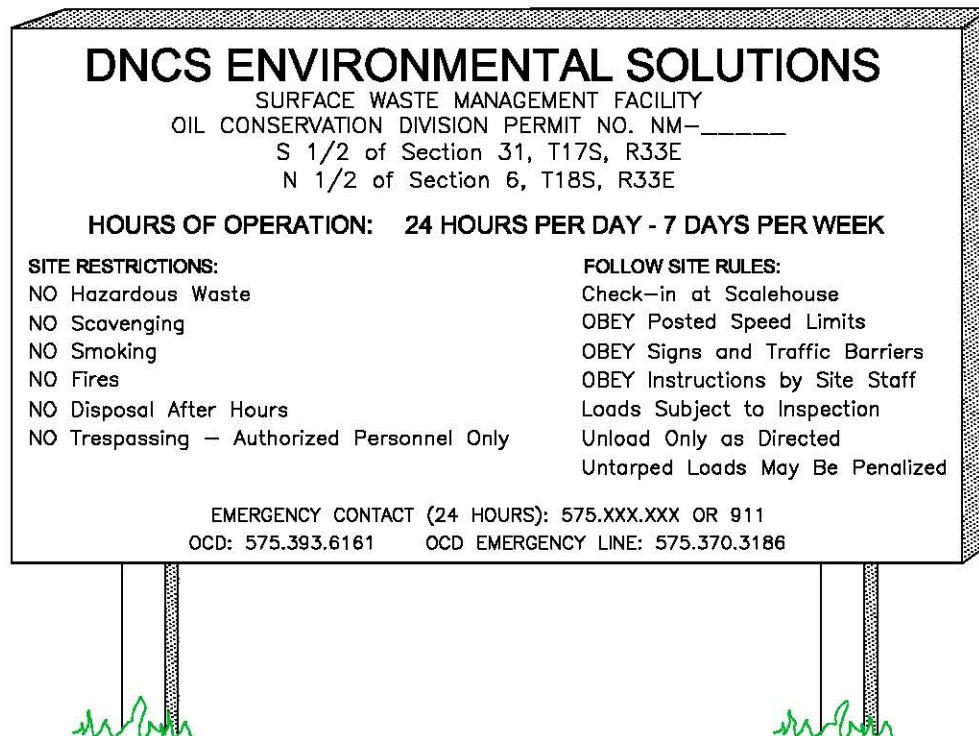

| | | |
|---|-----------------------------|---|
| SITE ENTRANCE SIGN (TYPICAL) DNCS ENVIRONMENTAL SOLUTIONS LEA COUNTY, NEW MEXICO | | |
|  Gordon Environmental, Inc. <i>Consulting Engineers</i> | | 213 S. Camino del Pueblo Bernalillo, New Mexico, USA Phone: 505-887-8990 Fax: 505-887-8991 |
| DATE: 06/03/2014 | CAD: ENTRANCE SIGN.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE I.4 |
| APPROVED BY: IKG | gal@gordonenvironmental.com | |

*The DNCS Facility is specifically designed to prevent pollutants from entering surface and groundwater, as demonstrated through the Facility Management Plans (**Volume II**), and the Engineering Design and Calculations (**Volume III**) and the **Permit Plans (Volume III.1)** presented in this Application. Successful implementation of the engineering design and operational programs will ensure compliance with 19.15.30 NMAC. The DNCS Contingency Plan (**Volume II.5**) is designed to comply with the notification and corrective action as required in 19.15.29 NMAC.*

- L. Each operator shall have an inspection and maintenance plan that includes the following:**
- (1) monthly inspection of leak detection sumps including sampling if fluids are present with analyses of fluid samples furnished to the division; and maintenance of records of inspection dates, the inspector and the leak detection system's status;**
 - (2) semi-annual inspection and sampling of monitoring wells as required, with analyses of ground water furnished to the division; and maintenance of records of inspection dates, the inspector and ground water monitoring wells' status; and**
 - (3) inspections of the berms and the outside walls of pond levees quarterly and after a major rainfall or windstorm, and maintenance of berms in such a manner as to prevent erosion.**

*The Operations, Inspection, and Maintenance Plan for the DNCS Facility is provided as **Volume II.1**. The Plan describes in detail the methods and frequency for inspections, sampling, recordkeeping, and maintenance for the leak detection sumps, and containment berms.*

- M. Each operator shall have a plan to control run-on water onto the site and run-off water from the site, such that:**
- (1) the run-on and run-off control system shall prevent flow onto the surface waste management facility's active portion during the peak discharge from a 25-year storm; and**
 - (2) run-off from the surface waste management facility's active portion shall not be allowed to discharge a pollutant to the waters of the state or United States that violates state water quality standards.**

***Volume III** (Engineering Design and Calculations) provides the design for berms, conveyance channels, and detention capacity to control run-on/run-off for at least the peak discharge from a 25-year 24-hour storm. DNCS will prevent discharge of pollutants to the waters of the State or United States in violation of state water quality standards through adherence to the*

Operations, Inspection, and Maintenance Plan (Volume II.1), and construction of the detention ponds described in this Application. If required after consultation with New Mexico Environment Department (NMED), DNCS will obtain a permit under the Multi-Sector General Permit for Stormwater Discharges (promulgated September 29, 2008).

- N. Contingency plan. Each operator shall have a contingency plan. The operator shall provide the division's environmental bureau with a copy of an amendment to the contingency plan, including amendments required by Paragraph (8) of Subsection N of 19.15.36.13 NMAC; and promptly notify the division's environmental bureau of changes in the emergency coordinator or in the emergency coordinator's contact information. The contingency plan shall be designed to minimize hazards to fresh water, public health, safety or the environment from fires, explosions or an unplanned sudden or non-sudden release of contaminants or oil field waste to air, soil, surface water or ground water. The operator shall carry out the plan's provisions immediately whenever there is a fire, explosion or release of contaminants or oil field waste constituents that could threaten fresh water, public health, safety or the environment; provided that the emergency coordinator may deviate from the plan as necessary in an emergency situation. The contingency plan for emergencies shall:**
- (1) describe the actions surface waste management facility personnel shall take in response to fires, explosions or releases to air, soil, surface water or ground water of contaminants or oil field waste containing constituents that could threaten fresh water, public health, safety or the environment;**
 - (2) describe arrangements with local police departments, fire departments, hospitals, contractors and state and local emergency response teams to coordinate emergency services;**
 - (3) list the emergency coordinator's name; address; and office, home and mobile phone numbers (where more than one person is listed, one shall be named as the primary emergency coordinator);**
 - (4) include a list, which shall be kept current, of emergency equipment at the surface waste management facility, such as fire extinguishing systems, spill control equipment, communications and alarm systems and decontamination equipment, containing a physical description of each item on the list and a brief outline of its capabilities;**
 - (5) include an evacuation plan for surface waste management facility personnel that describes signals to be used to begin evacuation, evacuation routes and alternate evacuation routes in cases where fire or releases of wastes could block the primary routes;**
 - (6) include an evaluation of expected contaminants, expected media contaminated and procedures for investigation, containment and correction or remediation;**
 - (7) list where copies of the contingency plan will be kept, which shall include the surface waste management facility; local police departments, fire departments and hospitals; and state and local emergency response teams;**

- (8) indicate when the contingency plan will be amended, which shall be within five working days whenever:

 - (a) the surface waste management facility permit is revised or modified;
 - (b) the plan fails in an emergency;
 - (c) the surface waste management facility changes design, construction, operation, maintenance or other circumstances in a way that increases the potential for fires, explosions or releases of oil field waste constituents that could threaten fresh water, public health, safety or the environment or change the response necessary in an emergency;
 - (d) the list of emergency coordinators or their contact information changes; or
 - (e) the list of emergency equipment changes;
- (9) describe how the emergency coordinator or the coordinator's designee, whenever there is an imminent or actual emergency situation, will immediately;

 - (a) activate internal surface waste management facility alarms or communication systems, where applicable, to notify surface waste management facility personnel; and
 - (b) notify appropriate state and local agencies with designated response roles if their assistance is needed;
- (10) describe how the emergency coordinator, whenever there is a release, fire or explosion, will immediately identify the character, exact source, amount and extent of released materials (the emergency coordinator may do this by observation or review of surface waste management facility records or manifests, and, if necessary, by chemical analysis) and describe how the emergency coordinator will concurrently assess possible hazards to fresh water, public health, safety or the environment that may result from the release, fire or explosion (this assessment shall consider both the direct and indirect hazard of the release, fire or explosion);
- (11) describe how, if the surface waste management facility stops operations in response to fire, explosion or release, the emergency coordinator will monitor for leaks, pressure buildup, gas generation or rupture in valves, pipes or the equipment, wherever this is appropriate;
- (12) describe how the emergency coordinator, immediately after an emergency, will provide for treating, storing or disposing of recovered oil field waste, or other material that results from a release, fire or explosion at a surface waste management facility;
- (13) describe how the emergency coordinator will ensure that no oil field waste, which may be incompatible with the released material, is treated, stored or disposed of until cleanup procedures are complete; and
- (14) provide that the emergency coordinator may amend the plan during an emergency as necessary to protect fresh water, public health, safety or the environment.

*The Contingency Plan included as **Volume II.5** provides detailed information in response to 19.15.36.13.N.1 through 14 NMAC.*

- O. Gas safety management plan.** Each operator of a surface waste management facility that includes a landfill shall have a gas safety management plan that describes in detail procedures and methods that will be used to prevent landfill-generated gases from interfering or conflicting with the landfill's operation and protect fresh water, public health, safety and the environment. The plan shall address anticipated amounts and types of gases that may be generated, an air monitoring plan that includes the vadose zone and measuring, sampling, analyzing, handling, control and processing methods. The plan shall also include final post closure monitoring and control options.

DNCS does not believe that this Section applies to the proposed Facility. Landfill Gas (LFG) is typically produced when there is a significant supply of readily putrescible organic material, moisture; and a lack of oxygen in the fill. Oil field wastes do not contain significant amounts of putrescible wastes and will not provide a suitable environment for LFG production. Typical oil field wastes will not generate significant quantities of LFG, nor the requisite pressure to promote migration. Conventional LFG monitoring and control systems would not be necessary or effective; and the waste matrix itself would inhibit migration or collection if it contained primarily soils and <5% degradable organics.

*However, a gas monitoring program consisting of testing incoming vehicles during unloading will be utilized to ensure that hydrogen sulfide (H₂S) gas concentrations do not exceed 10 parts per million (ppm) on-site or at the property boundary. Areas around the landfill disposal cells, treating plant, liquid solidification, and evaporation ponds will utilize monitors that issues a visual and audible signal at 10 ppm H₂S to ensure compliance with regulatory alert levels. Routine gas monitoring of the proposed vadose zone monitoring wells will also be conducted. Monitoring points may be added or replaced as necessary. Gas safety management details are presented in **Volume II.1**, **Volume II.5**, and the H₂S Prevention and Contingency Plan (**Volume II.3**).*

- P. Training program.** Each operator shall conduct an annual training program for key personnel that includes general operations, permit conditions, emergencies proper sampling methods and identification of exempt and non-exempt waste and hazardous waste. The operator shall maintain records of such training, subject to division inspection, for five years.

DNCS will comply with this requirement. The Operation, Inspection, and Maintenance Plan (Volume II.1) describes in detail the training programs for site personnel. Training records will be maintained by DNCS for OCD inspection for a period of not less than five years.

19.15.36.14 SPECIFIC REQUIREMENTS APPLICABLE TO LANDFILLS:

A. General operating requirements.

- (1) The operator shall confine the landfill's working face to the smallest practical area and compact the oil field waste to the smallest practical volume. The operator shall not use equipment that may damage the integrity of the liner system in direct contact with a geosynthetic liner.**

DNCS will follow accepted principles of landfill engineering for waste placement, compaction and covering methods. Operations will be conducted to maintain a confined working face so that it is sufficiently wide to provide for the safe unloading of trucks, but no greater than necessary. It is estimated that the typical thickness of each daily cell will be approximately 10 to 15 ft, with working slopes not greater than 2:1. In order to compact the waste to the smallest practical volume, the lifts will be spread in layers approximately 2 ft thick and worked by a high ground-pressure bulldozer or equivalent. The Engineering Design (Volume III.1) and the Liner Construction Quality Assurance (CQA) Plan (Volume II.7) mandate a 2 ft thick protective soil layer over the geosynthetic liner. The Operations, Inspection, and Maintenance Plan (Volume II.1) addresses daily fill face activities in detail provided to protect the liners during operations.

- (2) The operator shall prevent unauthorized access by the public and entry by large animals to the landfill's active portion through the use of fences, gates, locks or other means that attain equivalent protection.**

The DNCS Processing Area will be enclosed with barbed wire fencing, cattle guards, and locking gates, as will the DNCS Landfill (Figure I.2). This will prevent unauthorized access by the public or entry by large animals (Engineering Design, Volume III.1).

(3) The operator shall prevent and extinguish fires.

DNCS will provide adequate means to prevent and extinguish fires. Fire protection measures are described in detail in the Contingency Plan (Volume II.5). Measures to prevent and control fires are listed in Table I.7, which are augmented by focused employee training.

TABLE I.7
Fire Prevention and Control
DNCS Environmental Solutions

1. Fire Prevention Measures

- *Routine cleaning of debris from equipment, particularly radiators.*
- *Random inspections of incoming loads at the Processing Area Gatehouse and Landfill Scalehouse to prevent unauthorized waste acceptance.*
- *Training of equipment operators to identify suspect (“hot”) loads and measures for mitigation (e.g., covering smoldering waste with stockpiled soil).*
- *Coordination with local fire response professionals for input on fire prevention and control.*

2. Fire Control Procedures

- *The placement and maintenance of fire extinguishers in all mobile equipment and on-site structures.*
- *Locating cover material or borrow areas near the working face that can be used to smother fires.*
- *Ensuring water availability from the water truck and/or detention basins.*
- *Implementation of a site-wide communication network to optimize mobilization of appropriate response personnel and equipment.*
- *Employee training.*
- *Well established emergency response procedures.*

(4) The operator shall control litter and odors.

As described in the Operations, Inspection, and Maintenance Plan (Volume II.1), DNCS will be operated using proven disposal practices to minimize and control litter and odor. The waste stream will consist primarily of contaminated soils, which are not prone to wind-blown dispersion. The size of the actual working face will be minimized to facilitate compacting and covering the waste. Also, depending on wind direction and/or velocity, portable litter fences may be used to control blowing debris, in addition to the perimeter fencing; and most operations can be conducted below the grade of the perimeter berms as necessary.

Staff members will closely monitor the area adjacent to the working face for waste and litter. Litter will be removed and disposed of on a regular basis and within 24-hours if the waste has a potential for diversion or being transported by vectors. In order to control litter and mitigate potential odors, the active working face will typically be covered at the end of each operating day with at least 6 inches of daily cover, or an approved alternative daily cover material, when the solid waste contains significant amounts of waste prone to become windblown. The prevailing wind is from the south and southeast, and adjacent land uses to the north and northwest are open pasture/oil exploration.

- (5) The operator shall not excavate a closed cell or allow others to excavate a closed cell except as approved by the division.**

Excavation of permanently closed cells is not anticipated; however, if a permanently closed cell needs to be excavated, such excavation will be conducted only after prior approval has been obtained from OCD.

- (6) The operator shall provide adequate cover for the landfill's active face as needed to control dust, debris, odors or other nuisances, or as otherwise required by the division.**

*Soil cover, or an approved alternate cover, will be applied to the active face as needed. Approximately 6,000,000 cy of equivalent to 15% of the gross airspace, has been devoted to cover operations. In addition to the activities described in the response to 19.15.36.14.A.4 NMAC above regarding debris, odors, or other nuisances, DNCS will implement dust control measures as outlined in **Table I.8**.*

TABLE I.8
Dust Control
DNCS Environmental Solutions

A water truck will be available to apply water or approved recycled waters to the access roads and active areas within the DNCA Facility, as needed to reduce dust. In addition, the posted speed limit will be 15 mph inside the property. Listed below are routine operations that are the most likely sources of dust, along with recommended primary and secondary control measures:

- **Disposal Operations -**
 - Primary Control Measure: *Pave of high-traffic areas, apply water to unpaved roads as necessary, enforce speed limit posted on site.*
 - Secondary Control Measure: *Apply dust surfactant to unpaved portions of the Facility, provide additional pavement.*

- **Excavations -**
 - Primary Control Measure: Pre-water areas prior to and during excavation. Water areas of excavation and haul roads during and at the end of each day to form a dust-binding soil crust.
 - Secondary Control Measure: Phase work to reduce the amount of disturbed surfaces, apply additional water, work at lower elevations (i.e., below-grade) and when wind velocity is high.
- **Stockpiles -**
 - Primary Control Measure: Pre-water areas prior to excavation. Apply water to short-term stockpiles and when transporting soils.
 - Secondary Control Measure: Control vehicle access to the area. Apply dust surfactant to long-term stockpiles and apply seed/mulch to prevent erosion.
- **Track out extending onto public roadways –**
 - Primary Control Measure: Pave on-site entrance road, sweep as necessary.
 - Secondary Control Measure: Apply recycled asphalt, caliche/gravel pads or similar materials at the transition from unpaved to paved roadways.
- **Unpaved roadways and parking areas –**
 - Primary Control Measure: Limit vehicle speed via posting speed limits; apply water, use aggregate or caliche.
 - Secondary Control Measure: Apply water and surfactants to unpaved roads and parking lots, as needed, provide additional pavement.

- (7) **For areas of the landfill that will not receive additional oil field waste for one month or more, but have not reached the final waste elevation, the operator shall provide intermediate cover that shall be:**
- (a) **approved by the division;**
 - (b) **stabilized with vegetation; and**
 - (c) **inspected and maintained to prevent erosion and manage infiltration or leachate during the oil field waste deposition process.**

*DNCS will place an intermediate cover at least 6-inches thick, in addition to daily cover, over areas of the landfill that will not receive further oil field waste for one month or more, but have not reached final elevation. Areas of intermediate cover will be properly sloped to promote clean run-off and minimize leachate generation, and may be used for temporary cover stockpiles. Intermediate cover may be seeded with temporary grasses such as rye if the area will not be subject to additional landfilling within 12 months. If long-term re-vegetation is required, native grass will be applied after consultation with the local Natural Resources Conservation Service (NRCS) representative (see Closure/Post-closure Plan, **Volume II.4**). Areas of intermediate cover will be inspected periodically for erosion and settlement, and prompt regrading and maintenance action will be initiated as required. An Intermediate Cover Inspection and Maintenance Plan is provided as **Attachment II.1.G**.*

- (8) When the operator has filled a landfill cell, the operator shall close it pursuant to the conditions contained in the surface waste management facility permit and the requirements of Paragraph (2) of Subsection D of 19.15.36.18 NMAC. The operator shall notify the division's environmental bureau at least three working days prior to a landfill cell's closure.

DNCS will close a landfill cell when it has been filled to final grade in accordance with the conditions established in the Surface Waste Management Permit, 19.15.36.18.D(2) NMAC, and the Closure/Post-closure Plan provided in Volume II.4 of this Application. DNCS will install a prescriptive or alternative final cover system in accordance with 19.15.36.14.C(8) NMAC (see Permit Plans, Volume III.1). DNCS will notify OCD at least three working days prior to the landfill cell closure.

- B. Ground water monitoring program. If fresh ground water exists at a site, the operator shall, unless otherwise approved by the division, establish a ground water monitoring program, approved by the division's environmental bureau, which shall include a ground water monitoring work plan, a sampling and analysis plan, a ground water monitoring system and a plan for reporting ground water monitoring results. The ground water monitoring system shall consist of a sufficient number of wells, installed at appropriate locations and depths, to yield ground water samples from the uppermost aquifer that:
- (1) represent the quality of background ground water that leakage from a landfill has not affected; and
 - (2) represent the quality of ground water passing beneath and down gradient of the surface waste management facility.

DNCS presents information in Volume IV.2 (Hydrogeology) relating to the confirmed absence of groundwater resources beneath the proposed Facility. Justification for monitoring the most appropriate depth at the Chinle formation interface vs. uppermost aquifer, approximately 550 ft below the site, is specifically outlined in Volume IV.2. As an alternative to groundwater monitoring, DNCS has proposed to monitor the vadose zone as detailed in the Proposal for Vadose Zone Monitoring (Attachment II.8.A). The Vadose Zone Monitoring Plan is presented as Volume II.8 of this Application. The Plan includes the locations and construction details for ten potential vadose zone wells; as well as procedures for routine monitoring, and sampling and analysis, should this be required.

- C. Landfill design specification. New landfill design systems shall include a base layer and a lower geomembrane liner (e.g., composite liner), a leak detection system, an upper geomembrane liner, a leachate collection and removal system, a leachate collection and removal system protective layer, an oil field waste zone and a top landfill cover.**

*DNCS will construct a liner designed consistent with the requirements of 19.15.36.14.C NMAC at the proposed Facility. The liner design is described in **Volume III.1** (Engineering Design) and will be installed on a compacted subgrade and employ the prescriptive 60-mil high-density polyethylene (HDPE) liner as both the lower and upper components of the double-liner system (see **Permit Plans, Volume III.1**). The leak detection system will consist of a 200-mil geonet installed between the upper and lower geosynthetic liner system that will drain to the sump areas and confirm the integrity of the liner system. A 2 ft of uncompacted soil with a minimum saturated hydraulic conductivity (k_{sat}) of 5.2×10^{-4} cm/sec (i.e., drainage layer; protective soil layer; PSL) will be installed above the upper geosynthetic liner system to reduce any potential for hydrostatic head on the primary liner. The proposed alternative liner system was evaluated with the HELP Model (**Volume III.4**) and confirmed to be equivalent to the prescriptive liner system.*

*The liner system is detailed in the **Permit Plans (Volume III.1), Sheet 8**; and in the Liner CQA Plan (**Volume II.7**) provides geosynthetics specifications; and compatibility documentation is demonstrated in **Volume III.6**.*

- (1) The base layer shall, at a minimum, consist of two feet of clay soil compacted to a minimum 90 percent standard proctor density (ASTM D-698) with a hydraulic conductivity of 1×10^{-7} cm/sec or less. In areas where no ground water is present, the operator may propose an alternative base layer design, subject to division approval.**


*DNCS is proposing to install the primary synthetic liner on a 6-inch-thick subgrade, compacted to 90% standard proctor density followed by a geosynthetic clay liner (GCL) with a hydraulic conductivity of 5×10^{-9} centimeters per second (cm/sec) or less as the alternative base layer design. Calculations and technical properties of the compacted subgrade system and GCL are included in **Volume III**. The **Permit Plans (Volume III.1)** provide design elements of the subgrade component of the composite liner. The proposed alternative liner*

subgrade was evaluated with the HELP Model (Volume III.4) in conjunction with the proposed liner system and confirmed to provide protection equivalent or greater as to the prescriptive liner system.


- (2) The lower geomembrane liner shall consist of a 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner approved by the division.**

*The proposed liner design for the DNCS Landfill will employ the prescriptive 60-mil high-density polyethylene (HDPE) liner as the lower component of the liner system. HDPE has proven itself over numerous years to provide vastly superior performance to the 30-mil flexible polyvinylchloride (PVC) material that is also prescribed. The ease of seaming and testing HDPE also enhance its use in this application. The liner system is shown on **Figure I.5** and in the **Permit Plans (Volume III.1)**. The **Liner CQA Plan (Volume II.7)** provides geosynthetics specifications; and compatibility documentation is demonstrated in **Volume III.6**.*

- (3) The operator shall place the leak detection system, which shall consist of two feet of compacted soil with a saturated hydraulic conductivity of 1×10^{-5} cm/sec or greater, between the lower and upper geomembrane liners. The leak detection system shall consist of a drainage and collection system placed no more than six inches above the lower geomembrane liner in depressions and sloped so as to facilitate the earliest possible leak detection at designated collection points. Drainage piping shall be designed to withstand chemical attack from oil field waste and leachate and structural loading and other stresses and disturbances from overlying oil field waste, cover materials, equipment operation, expansion or contraction, and to facilitate clean-out maintenance. The material placed between the pipes and laterals shall be sufficiently permeable to allow the transport of fluids to the drainage pipe. The slope of the landfill sub-grade and drainage pipes and laterals shall be at least two percent grade; *i.e.*, two feet of vertical drop per 100 horizontal feet. The piping collection network shall be comprised of solid and perforated pipe having a minimum diameter of four inches and a minimum wall thickness of schedule 80. The operator shall seal a solid drainage pipe to convey collected liquids to a corrosion-proof sump or sumps located outside the landfill's perimeter for observation, storage, treatment or disposal. The operator may install alternative designs as approved by the division.**

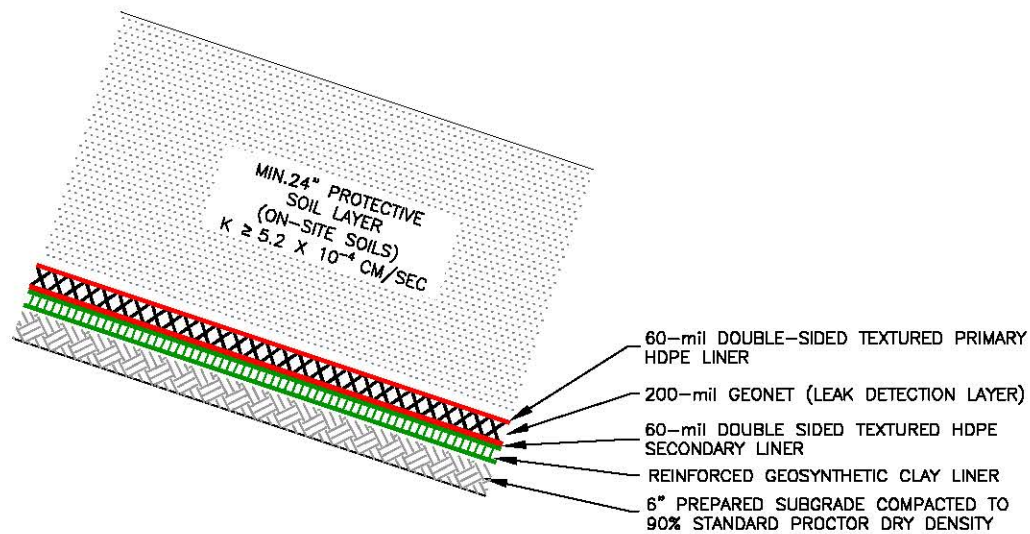

SIDEWALL LINER SYSTEM

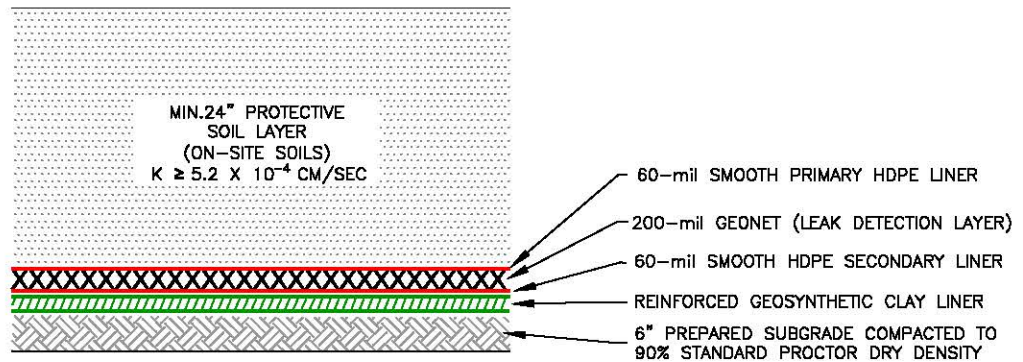

FLOOR LINER SYSTEM

LINER SCHEMATIC

DNCS ENVIRONMENTAL SOLUTIONS
 LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
 Consulting Engineers

213 S. Camino del Pueblo
 Bernalillo, New Mexico, USA
 Phone: 505-887-8990
 Fax: 505-887-8991

Drawing: P:\acad 2003\542.01.01\PERMIT FIGURES\LINER SCHEM.dwg
 Date/Time: Oct. 22, 2013-09:06:54
 Copyright © All Rights Reserved, Gordon Environmental, Inc. 2013

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 10/22/2013 | CAD: LINER SCHEM.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE I.5 |
| APPROVED BY: IKG | gal@gordonenvironmental.com | |

*DNCS proposes to install a leak detection system consisting of a 200-mil geonet between the lower (primary) and upper (secondary) liners, as the preferred alternative to the prescriptive 2-ft of compacted soil with a saturated hydraulic conductivity (k_{sat}) of 1×10^{-5} cm/sec. The geonet will have a minimum hydraulic conductivity (k) of 10 cm/sec. Calculations, compatibility, demonstrations and technical properties of the leak detection system are included in **Volume III** which document superior performance vs. the prescriptive design. The **Permit Plans (Volume III.1)** provide design elements of the leak detection system including:*

- *Minimum 2.8% slope on the liner and leak detection system vs. $\geq 2\%$ standard*
- *Sump and riser pipe details*
- *Composite liner (i.e., FML/GCL) beneath the entire double-lined footprint*

The Engineering Design (Volume III.1) and the Permit Plans provide detailed specifications demonstrating that the performance of the materials exceed the prescriptive standards. This use of the geonet in this alternative liner cross-section was evaluated with the HELP Model (Volume III.4) and confirmed to provide protection superior to the prescriptive liner system.

- (4) The operator shall place the upper geomembrane liner, which shall consist of a 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner approved by the division, over the leak detection system.**

*DNCS will construct a liner design that will employ the prescriptive 60-mil high-density polyethylene (HDPE) liner as the upper component of the liner system. The liner system is shown on **Figure I.5** and the **Permit Plans (Volume III.1)**; and the Liner CQA Plan (**Volume II.7**) provides geosynthetics specifications; and compatibility documentation is demonstrated in **Volume III.6**.*

- (5) The operator shall place the leachate collection and removal system, which shall consist of at least two feet of compacted soil with a saturated hydraulic conductivity of 1×10^{-2} cm/sec or greater, over the upper geomembrane liner to facilitate drainage. The leachate collection and removal system shall consist of a drainage and collection and removal system placed no more than six inches above the upper geomembrane liner in depressions and sloped so as to facilitate the maximum leachate collection. Piping shall be designed to withstand chemical attack from oil field waste or leachate and structural loading and other stresses and disturbances from overlying oil field waste, cover materials, equipment operation, expansion or contraction and to facilitate clean-out maintenance. The material placed between the pipes and laterals shall be sufficiently permeable to allow the**

transport of fluids to the drainage pipe. The slope of the upper geomembrane liner and drainage lines and laterals shall be at least two percent grade; *i.e.*, two feet of vertical drop per 100 horizontal feet. The piping collection network shall be comprised of solid and perforated pipe having a minimum diameter of four inches and a minimum wall thickness of schedule 80. The operator shall seal a solid drainage pipe to convey collected fluids outside the landfill's perimeter for storage, treatment and disposal. The operator may install alternative designs as approved by the division.

This collection zone will consist of a 2-ft thick uncompacted soil layer with a hydraulic conductivity of at least 5.2×10^{-4} cm/sec. This component of the alternative liner cross-section was evaluated with the HELP Model (Volume III.4) and confirmed to provide protection and performance superior to the prescriptive liner system. Drainage piping consisting of minimum 6 inch dia. SDR 11 HDPE piping will be installed to collect fluids from the liner surface. Calculations, compatibility, demonstrations and technical properties of the leak detection system are provided in Volume III. The Permit Plans (Volume III.1) provides design elements of the leachate collection and removal system including:

- *Minimum 2.8% slope on the liner and leak detection system*
- *Solid (risers) and perforated pipe details*
- *Sump and riser pipe configuration*
- *Composite liner (*i.e.*, FML/GCL) as the secondary liner system*

The Engineering Design (Volume III.1) and the Permit Plans provide detailed specifications for the piping collection systems demonstrating that the materials exceed the prescriptive standards.

- (6) **The operator shall place the leachate collection and removal system protection layer, which shall consist of a soil layer at least one foot thick with a saturated hydraulic conductivity of 1×10^{-2} cm/sec or greater, over the leachate collection and removal system.**

DNCS is proposing to install 2-ft of uncompacted soil with a minimum k_{sat} of 5.2×10^{-4} cm/sec, or greater, as the protection layer over the leachate collection and removal system. This component of the alternative liner cross-section was evaluated with the HELP Model (Volume III.4) and confirmed to provide protection and performance superior to the prescriptive liner

system. *HELP Modeling results indicate a maximum head of 5.2 inches on the liner vs. the design standard of ≤ 12 inches.*


- (7) The operator shall place oil field waste over the leachate collection and removal system protective layer.**

DNCS proposes to place oil field waste over the PSL for the leachate collection and removal system. The first lift, up to 5 ft in thickness, will consist of select uncompacted materials screened for items that could damage the liner (i.e., pipes, metal, etc.).


- (8) The top landfill cover design shall consist of the following layers (top to bottom): a soil erosion layer composed of at least 12 inches of fertile topsoil re-vegetated in accordance with the post closure provisions of Subparagraph (b) of Paragraph (2) of Subsection D of 19.15.36.18 NMAC; a protection or frost protection layer composed of 12 to 30 inches of native soil; a drainage layer composed of at least 12 inches of sand or gravel with a saturated hydraulic conductivity of 1×10^{-2} cm/sec or greater and a minimum bottom slope of four percent, a hydraulic barrier-layer-geomembrane (minimum of a 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner approved by the division); and a gas vent or foundation layer composed of at least 12 inches of sand or gravel above oil field waste with soils compacted to the minimum 80 percent Standard Proctor Density. The operator shall install the top landfill cover within one year of achieving the final landfill cell waste elevation. The operator shall ensure that the final landfill design elevation of the working face of the oil field waste is achieved in a timely manner with the date recorded in a field construction log. The operator shall also record the date of top landfill cover installation to document the timely installation of top landfill covers. The operator shall provide a minimum of three working days notice to the division in advance of the top landfill cover's installation to allow the division to witness the top landfill cover's installation.**

*DNCS proposes a prescriptive cover for the crown per 19.15.36.14.C(8) NMAC; and proposes an alternative final cover system for the sideslopes as described in 19.15.36.14.C.(9) NMAC. The crown or top deck of the finished landfill complies with the prescriptive standards for final covers, with a double-sided textured HDPE liner as the geosynthetic component; and a 5% design slope (**Figure I.6**).*

60-mil DOUBLE-SIDED TEXTURED
HDPE LINER

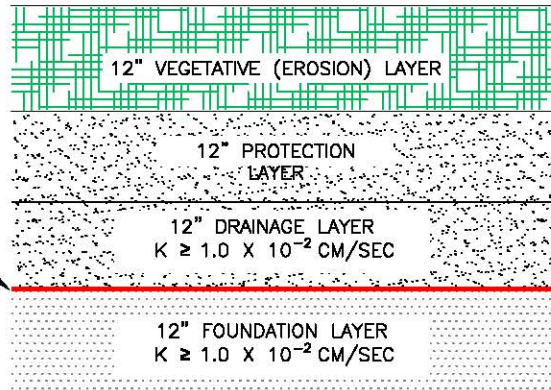

**FINAL COVER DETAIL CROWN
PRESCRIPTIVE DESIGN**

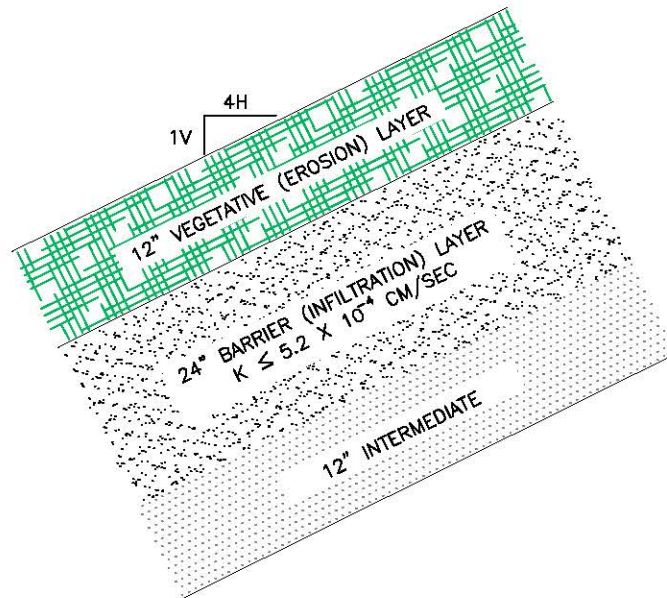

**FINAL COVER DETAIL SIDESLOPE
EVAPOTRANSPIRATION DESIGN**

FINAL COVER PROFILE

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.

Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

DATE: 10/22/2013

CAD: FINAL COVER.dwg

PROJECT #: 542.01.01

DRAWN BY: DMI

REVIEWED BY: DRT

APPROVED BY: IKG

gei@gordonenvironmental.com

FIGURE I.6

The sidewall final cover design is an evapotranspiration (ET) cap consisting of on-site soils. This is a more sustainable design than the prescriptive standard, as it does not require importation of off-site materials (i.e., HDPE from Houston). In addition, the prescriptive design is not stable on sideslopes, as soils above the geosynthetic layer will have a tendency to slide at 4:1, requiring extensive maintenance.

- (9) **Alternatively, the operator may propose a performance-based landfill design system using geosynthetics or geocomposites, including geogrids, geonets, geosynthetic clay liners, composite liner systems, etc., when supported by EPA’s “hydrologic evaluation of landfill performance” (HELP) model or other division-approved model. The operator shall design the landfill to prevent the “bathtub effect”. The bathtub effect occurs when a more permeable cover is placed over a less permeable bottom liner or natural subsoil.**

*DNCS has undertaken an evaluation of the materials and climate of the Facility based on the United States Environmental Protection Agency’s (USEPA) HELP Model and is proposing an alternative final cover system for the sideslopes (**Figure I.6**) based on the ET technology. The proposed sideslope final cover will include 1 ft of vegetation cover on top of a 2-ft barrier layer as demonstrated in **Volume III.4**.*

- (10) **External piping, e.g., leachate collection, leak detection and sump removal systems shall be designed for installation of a sidewall riser pipe. Pipes shall not penetrate the liner with the exception of gas vent or collection wells where the operator shall install a flexible clamped pipe riser through the top landfill cover liner that will accommodate oil field waste settling and will prevent tears.**

DNCS proposes to install the necessary piping to transfer liquids collected in the leak detection and leachate collection sumps up the sideslope and through the proposed alternative final cover system on the sideslope. This will allow for the measurement and removal of liquids that accumulate in either system. Risers for both systems will be constructed of 12 in dia. HDPE; and there are no pipe penetrations of either the primary or secondary liners.

D. Liner specifications and requirements.

(1) General requirements.

- (a) **Geomembrane liner specifications. Geomembrane liners shall consist of a 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner approved by the division. Geomembrane liners**

shall have a hydraulic conductivity no greater than 1×10^{-9} cm/sec. Geomembrane liners shall be composed of impervious, geosynthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. Liners shall also be resistant to ultraviolet light, or the operator shall make provisions to protect the material from sunlight. Liner compatibility shall comply with EPA SW-846 method 9090A.

*DNCS proposes a landfill liner design that will employ the prescriptive 60-mil HDPE liner as the upper component and the lower component of the liner system. The liner system is shown on the **Permit Plans (Volume III.1)**; the Liner CQA Plan (**Volume II.7**) provides geosynthetics specifications and installation standards; and compatibility documentation is demonstrated in **Volume III.6**.*

- (b) **Liners shall be able to withstand projected loading stresses, settling and disturbances from overlying oil field waste, cover materials and equipment operations.**

*The liner system will be able to withstand projected loading stresses, settling, and disturbances from overlying oil field waste, cover materials and equipment operations as demonstrated in the Liner Stress Analysis (**Volume III.7**), and Settlement Calculations (**Volume III.9**).*

- (c) **The operator shall construct liners with a minimum of two percent slope to promote positive drainage and to facilitate leachate collection and leak detection.**

*DNCS will construct the liner with a 2.8% slope to promote positive drainage and to facilitate leachate collection and leak detection. The liner system design is shown on the **Permit Plans (Volume III.1)**.*

- (2) **Additional requirements for geomembranes.**

- (a) **Geomembranes shall be compatible with the oil field waste to be disposed. Geomembranes shall be resistant to chemical attack from the oil field waste or leachate. The operator shall demonstrate this by means of the manufacturer's test reports, laboratory analyses or other division-approved method.**

The liner system geosynthetics specifications are provided in the CQA Plan (Volume II.7); and compatibility documentation is demonstrated in Volume III.6.

- (b) **Geosynthetic material the operator installs on a slope greater than 25 percent shall be designed to withstand the calculated tensile forces acting upon the material. The design shall consider the maximum friction angle of the geosynthetic with regard to a soil-geosynthetic or geosynthetic-geosynthetic interface and shall ensure that overall slope stability is maintained.**

There are no liner systems designed for slopes greater than 25%. The liner system will be able to withstand calculated tensile forces acting upon the material as demonstrated in the Liner Stress Analysis (Volume III.7), and Settlement Calculations (Volume III.9).

- (c) **The operator shall thermally seal (hot wedge) field seams in geosynthetic material with a double track weld to create an air pocket for non-destructive air channel testing. In areas where double-track welding cannot be achieved, the operator may propose alternative thermal seaming methods. A stabilized air pressure of 35psi, plus or minus one percent, shall be maintained for at least five minutes. The operator shall overlap liners four to six inches before seaming, and shall orient seams parallel to the line of maximum slope; i.e., oriented along, not across, the slope. The operator shall minimize the number of field seams in corners and irregularly shaped areas. The operator shall use factory seams whenever possible. The operator shall not install horizontal seams within five feet of the slope's toe. Qualified personnel shall perform all field seaming.**

The Engineering Design (Volume III.1) and Liner CQA Plan (Volume II.7) provide detailed specifications for the installation of geosynthetics in compliance with this section, including:

- *Foundation preparation*
- *Maximum (4:1) and minimum slopes (2.8%)*
- *Thermal seaming and testing procedures*
- *Field seams that will be oriented parallel to the line of maximum slope.*
- *Minimizing the number of field seams in corners and irregularly shaped areas.*
- *No horizontal seams within 5 ft of the toe of slope.*

All liner systems will be installed by qualified contractors with a least 10 million square ft of geosynthetic installation experience.

E. Requirements for the soil component of composite liners.

- (1) The operator shall place and compact the base layer to 90 percent standard proctor density on a prepared sub-grade.**

DNCS is proposing to place and compact the base layer to 90% Standard Proctor Density on a prepared subgrade of in situ soils per the CQA Plan (Volume II.7). Calculations and technical properties of the subgrade are included in Volume III, the Permit Plans provides design elements of the subgrade component of the composite liner.

- (2) The soil surface upon which the operator installs a geosynthetic shall be free of stones greater than one half inch in any dimension, organic matter, local irregularities, protrusions, loose soil and abrupt changes in grade that could damage the geosynthetic.**

DNCS will install the geosynthetic liner on a surface that is free of angular stones, organic matter, local irregularities, protrusions, loose soil or abrupt changes in grade that could potentially damage the geosynthetic (Volume II.7). Technical properties of the geosynthetic are provided in the CQA Plan, Volume II.7. The Permit Plans (Volume III.1) provide installation guidance for the geosynthetic component of the composite liner.

- (3) The operator shall compact a clay soil component of a composite liner to a minimum of 90 percent standard proctor density, which shall have, unless otherwise approved by the division, a plasticity index greater than 10 percent, a liquid limit between 25 and 50 percent, a portion of material passing the no. 200 sieve (0.074 mm and less fraction) greater than 40 percent by weight; and a clay content greater than 18 percent by weight.**

DNCS proposes to install a GCL below the synthetic liner. The soil subgrade below the GCL will be in situ materials with superior foundation characteristics to the fine-grained soils specified. Calculations and technical properties of the GCL and compacted soil subgrade system are included in Volume III. The Permit Plans (Volume III.1) provide design elements of this component of the composite liner. This component of the alternative liner system was evaluated with the HELP Model (Volume III.4) and confirmed to provide protection and performance equivalent to the prescriptive liner system.

- F. The leachate collection and removal system protective layer and the soil component of the leak detection system shall consist of soil materials that shall be free of organic matter, shall have a portion of material passing the no. 200 sieve no greater than five percent by weight and shall have a uniformity coefficient (Cu) less than 6, where Cu is defined as D_{60}/D_{10} . Geosynthetic materials or geocomposites including geonets and geotextiles, if used as components of the leachate collection and removal or leak detection system, shall have a hydraulic conductivity, transmissivity and chemical and physical qualities that oil field waste placement, equipment operation or leachate generation will not adversely affect. These geosynthetics or geocomposites, if used in conjunction with the soil protective cover for liners, shall have a hydraulic conductivity designed to ensure that the liner's hydraulic head never exceeds one foot.**

DNCS proposes to install a leak detection system consisting of a 200-mil geonet between the primary and secondary liners. The geocomposite has a minimum k value of 10 cm/sec. Calculations, compatibility, demonstrations and technical properties of the leak detection system are included in Volume III. The Permit Plans provide design elements of the leak detection system including:

- *Minimum 2.8% slope on the liner and leak detection system*
- *Sump and riser pipe detail*
- *Composite liner (i.e., FML/GCL) under each leak detection sump*

This component of the alternative liner cross-section was evaluated with the HELP Model (Volume III.4) and confirmed to provide protection and performance equivalent to the prescriptive liner system.

- G. Landfill gas control systems. If the gas safety management plan or requirements of other federal, state or local agencies require the installation of a gas control system at a landfill, the operator shall submit a plan for division approval, which shall include the following:**
- (1) the system's design, indicating the location and design of vents, barriers, collection piping and manifolds and other control measures that the operator will install (gas vent or collection wells shall incorporate a clamped and seamed pipe riser design through the top cover liner);**

Not Applicable. LFG is generated from the decomposition of readily degradable organic material, such as paper and other organic household and commercial wastes. The primary by-products, typically comprising over 99% of LFG by volume, are methane and carbon dioxide as stated in USEPA's AP-42 "Emission Factor Documentation" (08/19/97):

AP 42 – 2.4 Municipal Solid Waste Landfills

2.4.4 Emissions

Methane (CH₄) and CO₂ are the primary constituents of landfill gas, and are produced by microorganisms within the landfill under anaerobic conditions. Transformations of CH₄ and CO₂ are mediated by microbial populations that are adapted to the cycling of materials in anaerobic environments.

LFG is produced when there is a significant supply of readily putrescible organic material and moisture; plus a lack of oxygen. Oil field wastes do not provide a suitable environment for LFG production, and over 95% of the projected waste types would be subtracted from the decomposition equation used to demonstrate compliance with air quality requirements. Typical oil field wastes will not generate significant quantities of LFG, or the requisite pressure to promote migration. Conventional landfill gas monitoring and control systems are not necessary or effective, and the waste matrix itself would inhibit migration or collection if it contained < 5% degradable organics.

In addition, the New Mexico Environment Department (NMED) and USEPA do not mandate the installation of LFG controls until the landfill reaches a design capacity of over 3.2 million cubic yards (cy); or if migration is confirmed. Of this volume, typically over 75% is assumed to be organic waste subject to decomposition (as opposed to <5% of oil field waste). A surface waste management facility would need a design capacity of 64 million cy to qualify for landfill gas controls under NMED and USEPA standards, and DNCS has a design capacity of 33.6 million ± cubic yards.

- (2) if gas recovery is proposed, the design of the proposed gas recovery system and the system's major on-site components, including storage, transportation, processing, treatment or disposal measures required in the management of generated gases, condensates or other residues;**

DNCS does not proposing to conduct gas recovery or processing, as it will not be practical.

- (3) if gas processing is proposed, a processing plan designed in a manner that does not interfere or conflict with the activities on the site or required control measures or create or cause danger to persons or property;**
- (4) if gas disposal is proposed, a disposal plan designed:**
 - (a) in a manner that does not interfere or conflict with the activities on the site or with required control measures;**

- (b) so as not to create or cause danger to persons or property; and
- (c) with active forced ventilation, using vents located at least one foot above the landfill surface at each gas vent's location;
- (5) physical and chemical characterization of condensates or residues that are generated and a plan for their disposal;

Not Applicable.

- (6) means that the operator will implement to prevent gas' generation and lateral migration such that
 - (a) the concentration of the gases the landfill generates does not exceed 25 percent of the lower explosive limit for gases in surface waste management facility structures (excluding gas control or recovery system components); and
 - (b) the concentration of gases does not exceed the lower explosive limit for gases at the surface waste management facility boundary; and

In addition the following factors which inhibit the potential generation of other explosive gases (i.e., CH₄):

- *The oil field waste proposed to be accepted by DNCS is primarily non-putrescible (i.e., < 5%).*
- *The semi-arid climate characteristics of Lea County (low precipitation e.g., 12 inch of annual rainfall) (Volume IV.1).*
- *Low potential for moisture contribution from other sources, due to the installation of engineered control systems that divert run-on away from the disposal area.*
- *Waste is encapsulated by multilayered liner and cover systems.*
- *The vadose zone monitoring wells will be tested for the potential presence of methane, as described in Vadose Zone Monitoring Plan (Volume II.8). These wells are capable of detecting gas in the flow zone before it reaches the property line.*

- (7) a routine gas monitoring program providing for monitoring at least quarterly; the specific type and frequency of monitoring to be determined based on the following:
 - (a) soil conditions;
 - (b) the hydrogeologic and hydraulic conditions surrounding the surface waste management facility; and
 - (c) the location of surface waste management facility structures and property lines.

DNCS will implement a routine gas monitoring program for H₂S as outlined in Volume II.3; Hydrogen Sulfide Prevention and Contingency Plan and Volume II.1; Operations, Inspection,

and Maintenance Plan. Vadose Zone Monitoring Plan (Volume II.8) describes LFG monitoring in the vadose zone wells.

- H. Landfill gas response.** If gas levels exceed the limits specified in Paragraph (6) of Subsection G of 19.15.36.14 NMAC, the operator shall:
- (1) immediately take all necessary steps to ensure protection of fresh water, public health, safety and the environment and notify the division;**
 - (2) within seven days of detection, record gas levels detected and a description of the steps taken to protect fresh water, public health, safety and the environment;**
 - (3) within 30 days of detection, submit a remediation plan for gas releases that describes the problem's nature and extent and the proposed remedy; and**
 - (4) within 60 days after division approval, implement the remediation plan and notify the division that the plan has been implemented.**

DNCS will comply with this section in the event that landfill gas is detected in the vadose zone monitoring system; and emergency response to elevated H₂S levels is addressed in Volume II.3; Hydrogen Sulfide Prevention and Contingency Plan.

19.15.36.15 SPECIFIC REQUIREMENTS APPLICABLE TO LANDFARMS:

Not Applicable. DNCS does not propose to operate an OCD regulated landfarm.

19.15.36.16 SMALL LANDFARMS:

Small landfarms as defined in Paragraph (5) of Subsection A of 19.15.36.7 NMAC are exempt from 19.15.36 NMAC except for the requirements specified in 19.15.36.16 NMAC.

Not Applicable.

19.15.36.17 SPECIFIC REQUIREMENTS APPLICABLE TO EVAPORATION, STORAGE, TREATMENT AND SKIMMER PONDS:

- A. Engineering design plan.** An applicant for a surface waste management facility permit or modification requesting inclusion of a skimmer pit; an evaporation, storage or treatment pond; or a below-grade tank shall submit with the surface waste management facility permit application a detailed engineering design plan, certified by a registered profession engineer, including operating and maintenance procedures; a closure plan; and a hydrologic report that provides

sufficient information and detail on the site's topography, soils, geology, surface hydrology and ground water hydrology to enable the division to evaluate the actual and potential effects on soils, surface water and ground water. The plan shall include detailed information on dike protection and structural integrity; leak detection, including an adequate fluid collection and removal system; liner specifications and compatibility; freeboard and overtopping prevention; prevention of nuisance and hazardous odors such as H₂S; an emergency response plan, unless the pit is part of a surface waste management facility that has an integrated contingency plan; type of oil field waste stream, including chemical analysis; climatological factors, including freeze-thaw cycles; a monitoring and inspection plan; erosion control; and other pertinent information the division requests.

*The proposed DNCS Facility includes both a Processing Area and a Landfill. The Processing Area design includes (at full build-out) 12 evaporation ponds. **Volume III** (Engineering Design and Calculations), certified by I. Keith Gordon, P.E., provides the detailed engineering design plan for the proposed surface waste management facility, including:*

- *liner details*
- *calculations detailing dike protection and structural integrity*
- *leak detection system*
- *liner specifications and compatibility documentation*
- *freeboard and overtopping (wave action) analysis*
- *erosion control*
- *fluid collection and removal system*

Volume II (Facility Management Plans) describes:

- *operation and maintenance procedures*
- *Closure/Post-closure Plan*
- *H₂S Prevention and Contingency Plan*
- *emergency response plan*
- *monitoring and inspection plan*
- *oil field waste management plan*
- *Contingency Plan*
- *chemical analysis*

Volume IV (Siting and Hydrogeology) describes:

- *site topography*
- *soils*
- *geology*
- *surface hydrology*
- *groundwater hydrology*
- *climatology*

B. Construction, standards.

- (1) **In general.** The operator shall ensure each pit, pond and below-grade tank is designed, constructed and operated so as to contain liquids and solids in a manner that will protect fresh water, public health, safety and the environment.

The Liner CQA Plan (Volume II.7) provides detailed procedures for the proper construction of the berms and liner system in compliance with the Permit Plans (Volume III.1). The Processing Area, including pits, and ponds, is designed and will be constructed and operated so as to protect fresh water, safety, and the environment.

- (2) **Liners required.** Each pit or pond shall contain, at a minimum, a primary (upper) liner and a secondary (lower) liner with a leak detection system appropriate to the site's conditions.

DNCS will comply with this requirement. Volume III.1 provides the detail for the primary liner, secondary liner, and leak detection system that will be installed for each evaporation pond in compliance with these requirements.

- (3) **Liner specifications.** Liners shall consist of a 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner approved by the division. Synthetic (geomembrane) liners shall have a hydraulic conductivity no greater than 1×10^{-9} cm/sec. Geomembrane liners shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. Liner materials shall be resistant to ultraviolet light, or the operator shall make provisions to protect the material from sunlight. Liner compatibility shall comply with EPA SW-846 method 9090A.

The liner system design for the Processing Area ponds has been designed consistent with Section 19.15.36.17.B.(3) NMAC. The liner design will employ the prescriptive 60-mil HDPE liner as the upper component and the lower component of the liner system. The leak detection system will consist of a 200-mil HDPE geonet installed between the upper and secondary liner system that will drain to the sump areas. HDPE is the preferred material for waste containment based on over 30 years of successful applications.

The liner system is shown on the Permit Plans (Volume III.1); and the Liner CQA Plan (Volume II.7) provides geosynthetics specifications; and compatibility documentation is demonstrated in Volume III.6.

- (4) **Alternative liner media.** The division may approve other liner media if the operator demonstrates to the division's satisfaction that the alternative liner protects fresh water, public health, safety and the environment as effectively as the specified media.

The liner design will employ the prescriptive 60-mil HDPE liner as the upper component and lower component of the liner system. The alternative leak detection system will consist of a 200-mil geonet installed between the upper and secondary liner system draining towards the sump areas.

- (5) **Each pit or pond shall have a properly constructed foundation or firm, unyielding base, smooth and free of rocks, debris, sharp edges or irregularities, in order to prevent rupture or tear of the liner and an adequate anchor trench; and shall be constructed so that the inside grade of the levee is no steeper than 2H:1V. Levees shall have an outside grade no steeper than 3H:1V. The levees' tops shall be wide enough to install an anchor trench and provide adequate room for inspection and maintenance. The operator shall minimize liner seams and orient them up and down, not across a slope. The operator shall use factory seams where possible. The operator shall ensure field seams in geosynthetic material are thermally seamed (hot wedge) with a double track weld to create an air pocket for non-destructive air channel testing. A stabilized air pressure of 35 psi, plus or minus one percent, shall be maintained for at least five minutes. The operator shall overlap liners four to six inches before seaming, and orient seams parallel to the line of maximum slope, i.e., oriented along, not across, the slope. The operator shall minimize the number of field seams in corners and irregularly shaped areas. There shall be no horizontal seams within five feet of the slope's toe. Qualified personnel shall perform field seaming.**

The Engineering Design (Volume III.1) and Liner CQA Plan (Volume II.7) provide detailed specifications for the installation of geosynthetics in compliance with this section, including:

- *Foundation preparation*
- *Maximum (3:1) and minimum slopes (2.8%)*
- *Thermal seaming and testing procedures*
- *Field seams that will be oriented parallel to the line of maximum slope*
- *Minimizing the number of field seams in corners and irregularly shaped areas*
- *No horizontal seams within five ft of the toe of slope*

Liner systems will be installed by qualified contractors with a least 10 million square ft of geosynthetics installation experience.

- (6) At a point of discharge into or suction from the lined pit, the liner shall be protected from excessive hydrostatic force or mechanical damage, and external discharge lines shall not penetrate the liner.

*The liner details shown on the **Permit Plans (Volume III.1)** indicate the methods used to protect the liner. To address the hydrostatic forces and potential mechanical damage to the primary liner as a result of pumping into or suction out of the lined ponds; an additional sheet of 60-mil HDPE liner will be welded overtop of the primary liner in the areas that these activities are expected to be conducted. The **Permit Plans** shows the location of the additional 60-mil HDPE layer. There are no liner pipe penetrations in the facility design with the exception of the leak detection riser at the top of the slope.*

- (7) Primary liners shall be constructed of a synthetic material.

See response to 19.15.36.17.B.(3) NMAC.

- (8) A secondary liner may be a synthetic liner or an alternative liner approved by the division. Secondary liners constructed with compacted soil membranes, i.e., natural or processed clay and other soils, shall be at least three feet thick, placed in six-inch lifts and compacted to 95 percent of the material's standard proctor density, or equivalent. Compacted soil membranes used in a liner shall undergo permeability testing in conformity with ASTM standards and methods approved by the division before and after construction. Compacted soil membranes shall have a hydraulic conductivity of no greater than 1×10^{-8} cm/sec. The operator shall submit results of pre-construction testing to the division for approval prior to construction.

DNCS is not proposing a secondary alternate liner constructed of a soil component. DNCS proposes to utilize a secondary liner option consisting of 60-mil HDPE. See response to 19.15.36.17.B.(4) NMAC.

- (9) The operator shall place a leak detection system between the lower and upper geomembrane liners that consists of two feet of compacted soil with a saturated hydraulic conductivity of 1×10^{-5} cm/sec or greater to facilitate drainage. The leak detection system shall consist of a properly designed drainage and collection and removal system placed above the lower geomembrane liner in depressions and sloped so as to facilitate the earliest possible leak detection. Piping used shall be designed to withstand chemical attack from oil field waste or leachate; structural loading from stresses and

disturbances from overlying oil field waste, cover materials, equipment operation or expansion or contraction; and to facilitate clean-out maintenance. The material placed between the pipes and laterals shall be sufficiently permeable to allow the transport of fluids to the drainage pipe. The slope of the interior sub-grade and of drainage lines and laterals shall be at least a two percent grade, i.e., two feet vertical drop per 100 horizontal feet. The piping collection system shall be comprised of solid and perforated pipe having a minimum diameter of four inches and a minimum wall thickness of schedule 80. The operator shall seal a solid sidewall riser pipe to convey collected fluids to a collection, observation and disposal system located outside the perimeter of the pit or pond. The operator may install alternative methods as approved by the division.

*DNCS is proposing to install an alternative leak detection system consisting of a 200-mil geonet between the primary and secondary liners. The geocomposite will have a minimum k value of 10 cm/sec. Calculations, compatibility, demonstrations and technical properties of the leak detection system are included in **Volume III**. The **Permit Plans (Volume III.1)** provide design elements of the leak detection system including:*

- *Minimum 2.8% slope on the liner and leak detection system*
- *Sump and riser pipe details*
- *Composite liner (i.e., FML/GCL) under each leak detection sump*

*The Engineering Design and the **Permit Plans (Volume III.1)** provide detailed specifications for the piping collection systems demonstrating that the materials exceed the prescriptive standards.*

- (10) The operator shall notify the division at least 72 hours prior to the primary liner's installation so that a division representative may inspect the leak detection system before it is covered.**

DNCS will provide a milestone schedule to OCD in advance of liner construction, and notify OCD at least 72 hours prior to the primary liner installation.

- (11) The operator shall construct pits and ponds in a manner that prevents overtopping due to wave action or rainfall, and maintain a three foot freeboard at all times.**

*DNCS will comply with this requirement. **Volume III** provides detailed calculations demonstrating compliance with wave action, rainfall, and freeboard standards.*

- (12) **The maximum size of an evaporation or storage pond shall not exceed 10 acre-feet.**

DNCS will comply with this requirement. The proposed ponds are each approximately 9.5 acre-ft in capacity.

C. Operating standards.

- (1) **The operator shall ensure that only produced fluids or non-hazardous waste are discharged into or stored in a pit or pond; and that no measurable or visible oil layer is allowed to accumulate or remain anywhere on a pit's surface except an approved skimmer pit.**

The Oil Field Waste Management Plan (Volume II.2) provides detailed procedures to ensure that only produced fluids are placed into or stored in a pit or pond, including load rejection procedures. The Operations, Inspection, and Maintenance Plan (Volume II.1, Section 6.2) addresses measurable or visible oil layer.

- (2) **The operator shall monitor leak detection systems pursuant to the approved surface waste management facility permit conditions, maintain monitoring records in a form readily accessible for division inspection and report discovery of liquids in the leak detection system to the division within 24 hours.**

DNCS will comply with this requirement. The Operations, Inspection, and Maintenance Plan (Volume II.1) provides a more detailed description of monitoring, recordkeeping and procedures for management of liquids in the leak detection system.

- (3) **Fencing and netting. The operator shall fence or enclose pits or ponds to prevent unauthorized access and maintain fences in good repair. Fences are not required if there is an adequate perimeter fence surrounding the surface waste management facility. The operator shall screen, net, cover or otherwise render non-hazardous to migratory birds tanks exceeding eight feet in diameter and exposed pits and ponds. Upon written application, the division may grant an exception to screening, netting or covering requirements upon the operator's showing that an alternative method will adequately protect migratory birds or that the tank or pit is not hazardous to migratory birds.**

The perimeter of the DNCS Facility (i.e., the Processing Area and the Landfill) will be enclosed with barbed wire fencing and locking gates. The Permit Plans, Sheet 3 (Volume III.1) graphically describes the proposed locations of the existing and proposed perimeter fencing.

DNCS requests an alternate method to the prescriptive migratory bird screening requirement. The Migratory Bird Protection Plan (Volume II.6) describes the proposed alternate methodology to the screening requirement of the storage ponds. This Plan describes visual inspections and migratory bird retrieval and clean-up procedures in the unlikely event that birds require decontamination.

- (4) The division may approve spray systems to enhance natural evaporation. The operator shall submit engineering designs for spray systems to the division's environmental bureau for approval prior to installation. The operator shall ensure that spray evaporation systems are operated so that spray-borne suspended or dissolved solids remain within the perimeter of the pond's lined portion.**

DNCS proposes to install a spray system utilizing mechanical evaporators to enhance natural evaporation in the proposed ponds. The Operations, Inspection, and Maintenance Plan (Volume II.1) provides the design, operation and maintenance of the proposed system. The proposed mechanical evaporation system is designed to prevent spray-borne suspended or dissolved solids from exiting the perimeter of the pond's liner area. In addition, this system will not be operated when wind velocity exceeds fourteen miles per hour (sustained) via automatic shut-off mechanisms. There is also a minimum setback between the ponds and the property line of 450 ft.

- (5) The operator shall use skimmer pits or tanks to separate oil from produced water prior to water discharge into a pond. The operator shall install a trap device in connected ponds to prevent solids and oils from transferring from one pond to another unless approved in the surface waste management facility permit.**

DNCS will utilize receiving and settling tanks to process water accepted at the Facility that requires separation of oil from water as described in the Operations, Inspection, and Maintenance Plan (Volume II.1). No oil processing is proposed in open pits, and oil residues will be removed from water prior to discharging into the evaporation ponds.

D. Below-grade tanks and sumps.

- (1) The operator shall construct below-grade tanks with secondary containment and leak detection. The operator shall not allow below-grade tanks to overflow. The operator shall install only below-grade tanks of materials resistant to the tank's particular contents and to damage from sunlight.**

DNCS does not propose to construct or operate below-grade tanks at the proposed Facility.

- (2) The operator shall test sumps' integrity annually, and shall promptly repair or replace a sump that does not demonstrate integrity. The operator may test sumps that can be removed from their emplacements by visual inspection. The operator shall test other sumps by appropriate mechanical means. The operator shall maintain records of sump inspection and testing and make such records available for division inspection.**

The DNCS Facility design includes below-grade sumps. The tank farm, landfill and evaporation pond containment will include leak detection systems and sumps which will be monitored in compliance with 19.15.36.17.D(2) NMAC.

E. Closure required. The operator shall properly close pits, ponds and below-grade tanks within six months after cessation of use.

DNCS will comply with this requirement. The Closure/Post-closure Plan (Volume II.4) describes closure timeframes in detail.

19.15.36.18 CLOSURE AND POST CLOSURE:

A. Surface waste management facility closure by operator.

- (1) The operator shall notify the division's environmental bureau at least 60 days prior to cessation of operations at the surface waste management facility and provide a proposed schedule for closure. Upon receipt of such notice and proposed schedule, the division shall review the current closure plan for adequacy and inspect the surface waste management facility.**

DNCS will comply with this requirement. The Closure/Post-closure Plan (Volume II.4) describes closure notification requirements in detail.

- (2) The division shall notify the operator within 60 days after the date of cessation of operations specified in the operator's closure notice of modifications of the closure plan and proposed schedule or additional requirements that it determines are necessary for the protection of fresh water, public health, safety or the environment.

No response required.

- (3) If the division does not notify the operator of additional closure requirements within 60 days as provided, the operator may proceed with closure in accordance with the approved closure plan; provided that the director may, for good cause, extend the time for the division's response for an additional period not to exceed 60 days by written notice to the operator.

DNCS will comply with this requirement.

- (4) The operator shall be entitled to a hearing concerning a modification or additional requirement the division seeks to impose if it files an application for a hearing within 10 days after receipt of written notice of the proposed modifications or additional requirements.

DNCS will comply with this requirement.

- (5) Closure shall proceed in accordance with the approved closure plan and schedule and modifications or additional requirements the division imposes. During closure operations the operator shall maintain the surface waste management facility to protect fresh water, public health, safety and the environment.

DNCS will comply with this requirement.

- (6) Upon completion of closure, the operator shall re-vegetate the site unless the division has approved an alternative site use plan as provided in Subsection G of 19.15.36.18 NMAC. Re-vegetation, except for landfill cells, shall consist of establishment of a vegetative cover equal to 70 percent of the native perennial vegetative cover (un-impacted by overgrazing, fire or other intrusion damaging to native vegetation) or scientifically documented ecological description consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintenance of that cover through two successive growing seasons.

DNCS will comply with this requirement. The Closure/Post-closure Plan (Volume II.4) describes in detail revegetation and maintenance plans for the Facility.

B. Release of financial assurance.

- (1) When the division determines that closure is complete it shall release the financial assurance, except for the amount needed to maintain monitoring wells for the applicable post closure care period, to perform semi-annual analyses of such monitoring wells and to re-vegetate the site. Prior to the partial release of the financial assurance covering the surface waste management facility, the division shall inspect the site to determine that closure is complete.**

The Closure/Post-closure Plan (Volume II.4) provides the estimated amount, in current dollars, required for the Post-closure care and maintenance.

- (2) After the applicable post closure care period has expired, the division shall release the remainder of the financial assurance if the monitoring wells show no contamination and the re-vegetation in accordance with Paragraph (6) of Subsection A of 19.15.36.18 NMAC is successful. If monitoring wells or other monitoring or leak detection systems reveal contamination during the surface waste management facility's operation or in the applicable post closure care period following the surface waste management facility's closure the division shall not release the financial assurance until the contamination is remediated in accordance with 19.15.30 NMAC and 19.15.29 NMAC, as applicable.**

DNCS will comply with this requirement.

- (3) In any event, the division shall not finally release the financial assurance until it determines that the operator has successfully revegetated the site in accordance with Paragraph (6) of Subsection A of 19.15.36.18 NMAC, or, if the division has approved an alternative site use plan, until the landowner has obtained the necessary regulatory approvals and begun implementation of the use.**

No response required.

C. Surface waste management facility closure initiated by the division. Forfeiture of financial assurance.

- (1) For good cause, the division may, after notice to the operator and an opportunity for a hearing, order immediate cessation of a surface waste management facility's operation when it appears that cessation is necessary to protect fresh water, public health, safety or the environment, or to assure compliance with statutes or division rules and orders. The division may order closure without notice and an opportunity for hearing**

in the event of an emergency, subject to NMSA 1978, Section 70-2-23, as amended.

No response required.

- (2) If the operator refuses or is unable to conduct operations at a surface waste management facility in a manner that protects fresh water, public health, safety and the environment; refuses or is unable to conduct or complete an approved closure plan; is in material breach of the terms and conditions of its surface waste management facility permit; or the operator defaults on the conditions under which the division accepted the surface waste management facility's financial assurance; or if disposal operations have ceased and there has been no significant activity at the surface waste management facility for six months the division may take the following actions to forfeit all or part of the financial assurance:**
- (a) send written notice by certified mail, return receipt requested, to the operator and the surety, if any, informing them of the decision to close the surface waste management facility and to forfeit the financial assurance, including the reasons for the forfeiture and the amount to be forfeited, and notifying the operator and surety that a hearing request or other response shall be made within 10 days of receipt of the notice; and**
 - (b) advise the operator and surety of the conditions under which they may avoid the forfeiture; such conditions may include but are not limited to an agreement by the operator or another party to perform closure and post closure operations in accordance with the surface waste management facility permit conditions, the closure plan (including modifications or additional requirements imposed by the division) and division rules, and satisfactory demonstration that the operator or other party has the ability to perform such agreement.**

DNCS will cooperate with OCD concerning this requirement and does not foresee any instance in which the Facility will not be operated in compliance with the Permit or Permit Conditions.

- (3) The division may allow a surety to perform closure if the surety can demonstrate an ability to timely complete the closure and post closure in accordance with the approved plan.**

No response required.

- (4) If the operator and the surety do not respond to a notice of proposed forfeiture within the time provided, or fail to satisfy the specified conditions for non-forfeiture, the division shall proceed, after hearing if the operator or surety has timely requested a hearing, to declare the financial assurance's forfeiture. The division may then proceed to collect the forfeited amount and use the funds to complete the closure, or, at the division's election, to close the surface waste management facility and collect the forfeited amount as reimbursement.
- (a) The division shall deposit amounts collected as a result of forfeiture of financial assurance in the oil and gas reclamation fund.
 - (b) In the event the amount forfeited and collected is insufficient for closure, the operator shall be liable for the deficiency. The division may complete or authorize completion of closure and post closure and may recover from the operator reasonably incurred costs of closure and forfeiture in excess of the amount collected pursuant to the forfeiture.
 - (c) In the event the amount collected pursuant to the forfeiture was more than the amount necessary to complete closure, including remediation costs, and forfeiture costs, the division shall return the excess to the operator or surety, as applicable, reserving such amount as may be reasonably necessary for post closure monitoring and re-vegetation in accordance with Paragraph (6) of Subsection A of 19.15.36.18 NMAC. The division shall return excess of the amount retained over the actual cost of post closure monitoring and re-vegetation to the operator or surety at the later of the conclusion of the applicable post closure period or when the site re-vegetation in accordance with Paragraph (6) of Subsection A of 19.15.36.18 NMAC is successful.

No response required. The conditions listed are not anticipated.

- (5) If the operator abandons the surface waste management facility or cannot fulfill the conditions and obligations of the surface waste management facility permit or division rules, the state of New Mexico, its agencies, officers, employees, agents, contractors and other entities designated by the state shall have all rights of entry into, over and upon the surface waste management facility property, including all necessary and convenient rights of ingress and egress with all materials and equipment to conduct operation, termination and closure of the surface waste management facility, including but not limited to the temporary storage of equipment and materials, the right to borrow or dispose of materials and all other rights necessary for the surface waste management facility's operation, termination and closure in accordance with the surface waste management facility permit and to conduct post closure monitoring.

No response required. The conditions listed are not required.

D. Surface waste management facility and cell closure and post closure standards. The following minimum standards shall apply to closure and post closure of the installations indicated, whether the entire surface waste management facility is being closed or only a part of the surface waste management facility.

(1) Oil treating plant closure. The operator shall ensure that:

- (a) tanks and equipment used for oil treatment are cleaned and oil field waste is disposed of at a division-approved surface waste management facility (the operator shall reuse, recycle or remove tanks and equipment from the site within 90 days of closure);**
- (b) the site is sampled, in accordance with the procedures specified in chapter nine of EPA publication SW-846, test methods for evaluating solid waste, physical/chemical methods, for TPH, BTEX, major cations and anions and RCRA metals, in accordance with a gridded plat of the site containing at least four equal sections that the division has approved; and**
- (c) sample results are submitted to the environmental bureau in the division's Santa Fe office.**

DNCS will implement the Closure/Post-closure Plan (Volume II.4) for closure activities in compliance with 19.15.36.18.D NMAC.

(2) Landfill cell closure.

- (a) The operator shall properly close landfill cells, covering the cell with a top cover pursuant to Paragraph (8) of Subsection C of 19.15.36.14 NMAC, with soil contoured to promote drainage of precipitation; side slopes shall not exceed a 25 percent grade (four feet horizontal to one foot vertical), such that the final cover of the landfill's top portion has a gradient of two percent to five percent, and the slopes are sufficient to prevent the ponding of water and erosion of the cover material.**
- (b) The operator shall re-vegetate the area overlying the cell with native grass covering at least 70 percent of the landfill cover and surrounding areas, consisting of at least two grasses and not including noxious weeds or deep rooted shrubs or trees, and maintain that cover through the post closure period.**

DNCS will implement the Closure/Post-closure Plan (Volume II.4) for the Landfill cells. The Permit Plans, Sheet 5 provides the engineering design for the overall final grading contours for the Landfill. DNCS proposed to install a prescriptive cover on the crown of the Landfill per 19.15.36.14.C(8) NMAC; and an alternate cover on the sideslopes per 19.15.36.14.C(9) NMAC. The side slopes will be no greater than 25% (4 horizontal to 1 vertical) and the top crown will be constructed to a design grade of 5%. The alternate sideslope final cover includes

12-inches of compacted impermeable materials (intermediate cover) overlain with a 2-ft thick barrier (infiltration layer; $k \leq 5.0 \times 10^{-5}$ cm/sec) that is capped with a 12-inch vegetative (erosion) layer, all graded to drain. The Landfill final cover details are shown in **Figure II.4.3** and on the **Permit Plans, Sheet 8**. DNCS proposes to utilize the prescriptive final cover configuration on the finished Landfill crown. The final cover, as well as other disturbed areas of the site, will be seeded with native vegetation. Vegetation on the site will be established during the optimum planting period, whenever possible. Examples of seed types have been identified and recommended by the NRCS.

- (3) **Landfill post closure.** Following landfill closure, the post closure care period for a landfill shall be 30 years.
 - (a) A post closure care and monitoring plan shall include maintenance of cover integrity, maintenance and operation of a leak detection system and leachate collection and removal system and operation of gas and ground water monitoring systems.
 - (b) The operator or other responsible entity shall sample existing ground water monitoring wells annually and submit reports of monitoring performance and data collected within 45 days after the end of each calendar year. The operator shall report any exceedance of a ground water standard that it discovers during monitoring pursuant to 19.15.29 NMAC.

DNCS will implement the Closure/Post-closure Plan, (Volume II.4) for the post-closure care and monitoring required.

- (4) **Landfarm closure.** The operator shall ensure that:

Not applicable; DNCS is not proposing landfarm facilities.

E. Pond and pit closure. The operator shall ensure that:

- (1) liquids in the ponds or pits are removed and disposed of in a division-approved surface waste management facility;
- (2) liners are disposed of in a division-approved surface waste management facility;
- (3) equipment associated with the surface waste management facility is removed;
- (4) the site is sampled, in accordance with the procedures specified in chapter nine of EPA publication SW-846, test methods for evaluating solid waste, physical/chemical methods for TPH, BTEX, metals and other inorganics listed in Subsections A and B of 20.6.2.3103 NMAC, in accordance with a

- gridded plat of the site containing at least four equal sections that the division has approved; and
- (5) sample results are submitted to the environmental bureau in the division's Santa Fe office.

DNCS will comply with this requirement. The Closure/Post-closure Plan (Volume II.4) describes in detail facility decommissioning, including liquid, liner and equipment disposal; as well as sampling, testing, and reporting when closure of the Facility is implemented.

- F. **Landfarm and pond and pit post closure.** The post-closure care period for a landfarm or pond or pit shall be three years if the operator has achieved clean closure. During that period the operator or other responsible entity shall regularly inspect and maintain required revegetation. If there has been a release to the vadose zone or to ground water, then the operator shall comply with the applicable requirements of 19.15.30 NMAC and 19.15.29 NMAC.

No response required.

- G. **Alternatives to re-vegetation.** If the landowner contemplates use of the land where a cell or surface waste management facility is located for purposes inconsistent with re-vegetation, the landowner may, with division approval, implement an alternative surface treatment appropriate for the contemplated use, provided that the alternative treatment will effectively prevent erosion. If the division approves an alternative to re-vegetation, it shall not release the portion of the operator's financial assurance reserved for post-closure until the landowner has obtained necessary regulatory approvals and begun implementation of such alternative use.

If applicable, DNCS will comply with this requirement.

19.15.36.19 EXCEPTIONS AND WAIVERS:

- A. **In a surface waste management facility permit application, the applicant may propose alternatives to requirements of 19.15.36 NMAC, and the division may approve such alternatives if it determines that the proposed alternatives will provide equivalent protection of fresh water, public health, safety and the environment.**

DNCS is requesting alternatives to the requirements consistent with the flexibility provided for:

- *LFG Control requirements per 19.15.36.13.O NMAC (this Volume)*
- *Groundwater monitoring per 19.15.36.14.B(1-2) NMAC (Volumes II.8 and IV.2)*
- *Geonet Detection and Drainage Layers per 19.15.36.14.C (Volume III.4)*

- *Final Cover per 19.15.36.14.C(9) NMAC (Volume III.4)*
- *Bird Control Alternatives per 19.15.36.19 NMAC (Volume II.6)*

Demonstrations and justifications have been provided in the referenced sections and associated technical documentation.

- B. The division may grant exceptions to, or waivers of, or approve alternatives to requirements of 19.15.36 NMAC in an emergency without notice or hearing. The operator requesting an exception or waiver, except in an emergency, shall apply for a surface waste management facility permit modification in accordance with Subsection C of 19.15.36.8 NMAC. If the requested modification is a major modification, the operator shall provide notice of the request in accordance with 19.15.36.9 NMAC.**

DNCS will comply with this requirement.

19.15.36.20 TRANSITIONAL PROVISIONS:

DNCS is a proposed new Surface Waste Management Facility. No response required.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**

**ATTACHMENT I.A
PUBLIC NOTIFICATION**



April 16, 2014

Mr. Jim Griswold
Chief, Environmental Bureau
Oil Conservation Division
Energy, Minerals, and Natural Resources Department
1220 South St. Francis Drive
Santa Fe, NM 87505

**Re: Documentation of Public Notice of Application
DNCS Environmental Solutions [542.01.01]
Surface Waste Management Facility**

Dear Mr. Griswold,

On behalf of our client, DNCS Properties, LLC, Gordon Environmental, Inc. (GEI) is pleased to submit the enclosed documentation comprising proof of Public Notice of Application per 19.15.36.A NMAC for the proposed DNCS Environmental Solutions Surface Waste Management Facility.

DNCS received the Oil Conservation Division's (OCD) Notice of Administrative Completeness Determination dated 12/09/2013. The New Mexico Oil & Gas Rules (19.15.36.A NMAC) require that the Applicant provide written Notice of Application by certified mail, return receipt requested, to surface owners of record within one-half mile of the proposed surface waste management facility; the county commission of the county where the site is located; and city officials if the site is located in a city (or within one half-mile thereof).

The proposed DNCS facility is located in Lea County, New Mexico. The Lea County Assessor maintains property records online at: <http://emaps.emapsplus.com/standard/leaconm.html>. GEI reviewed the Assessor's records in order to update the list of surface owners within one-half mile of the DNCS Site (**Table I.A-1**). A corresponding map, identifying the surface owners of record, is provided as **Figure I.A-1**. The Notice of Application language is provided as **Attachment A**.


GEI issued the Notice of Application via certified, return-receipt mail to the owners and entities identified on **Table I.A-1**. Copies of the Certified Mailings and Return Receipts are provided as **Attachment B**.

We appreciate your review of the Notice of Application documentation and look forward to working with you on the DNCS Surface Waste Management Facility project. Please contact us with your comments or questions at 505.867.6990 or dtucholke@gordonenvironmental.com.

Very Truly Yours,
Gordon Environmental, Inc.



I. Keith Gordon, P.E.
Principal

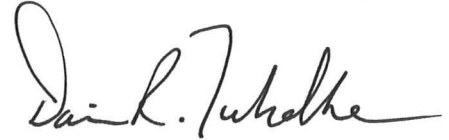

Dacia R. Tucholke
Project Manager

cc: DNCS Properties, LLC
Dr. Mark Turnbough

Attachments:

Table I.A-1: Surface Owners of Record within ½-Mile of the DNCS Site
Figure I.A-1: ½-Mile Radius Map
Attachment A: Notice of Application
Attachment B: Certified Mailing and Return Receipts

Table I.A-1
Surface Owners of Record within 1/2-Mile of the DNCS Site

TABLE I.A-1
Surface Owners of Record within 1/2-mile of the DNCS Site¹
DNCS Environmental Solutions

| OWNER | UPC | ADDRESS | CITY | STATE | ZIP |
|---|-----------------|-------------------|------------|-------|------------|
| Concho Land, LLC ² | 4971005094433 | P.O. Box 1567 | Lovington | NM | 88260 |
| | 4991030150851 | | | | |
| XTO Energy, Inc. ² | 4930502122422 | 810 Houston St. | Fort Worth | TX | 76102 |
| Angell #2 Family LTD Partnership ² | 4000352490010 | P.O. Box 190 | Lovington | NM | 88260 |
| Ross Caviness ² | 4971011152409 | 3718 NM 114 | Causey | NM | 88113 |
| | 4000352460008 | | | | |
| | 4000352460004 | | | | |
| Olane Caswell ² | 4000031390002 | 1702 Gillham Dr. | Brownfield | TX | 79316 |
| Bureau of Land Management ² | NA ⁴ | 620 E. Greene St. | Carlsbad | NM | 88220 |
| New Mexico State Land Office ² | NA ⁴ | P.O. Box 1148 | Santa Fe | NM | 87504-1148 |
| Lea County Commission ³ | NA ⁴ | 100 N. Main St. | Lovington | NM | 88260 |
| Lea County Manager ³ | NA ⁴ | 100 N. Main St. | Lovington | NM | 88260 |

Notes:


¹ Data provided by Lea County Assessor's Office: <http://emaps.emapsplus.com/standard/leaconm.html>; data current as of 02/19/2014.

² Surface owner of record within 1/2-mile of DNCS site.

³ County Government of the county in which DNCS is located (Lea County).

⁴ NA - Notified party is not associated with a specific Parcel Code (i.e., UPC).

Figure I.A-1
½-Mile Radius Map

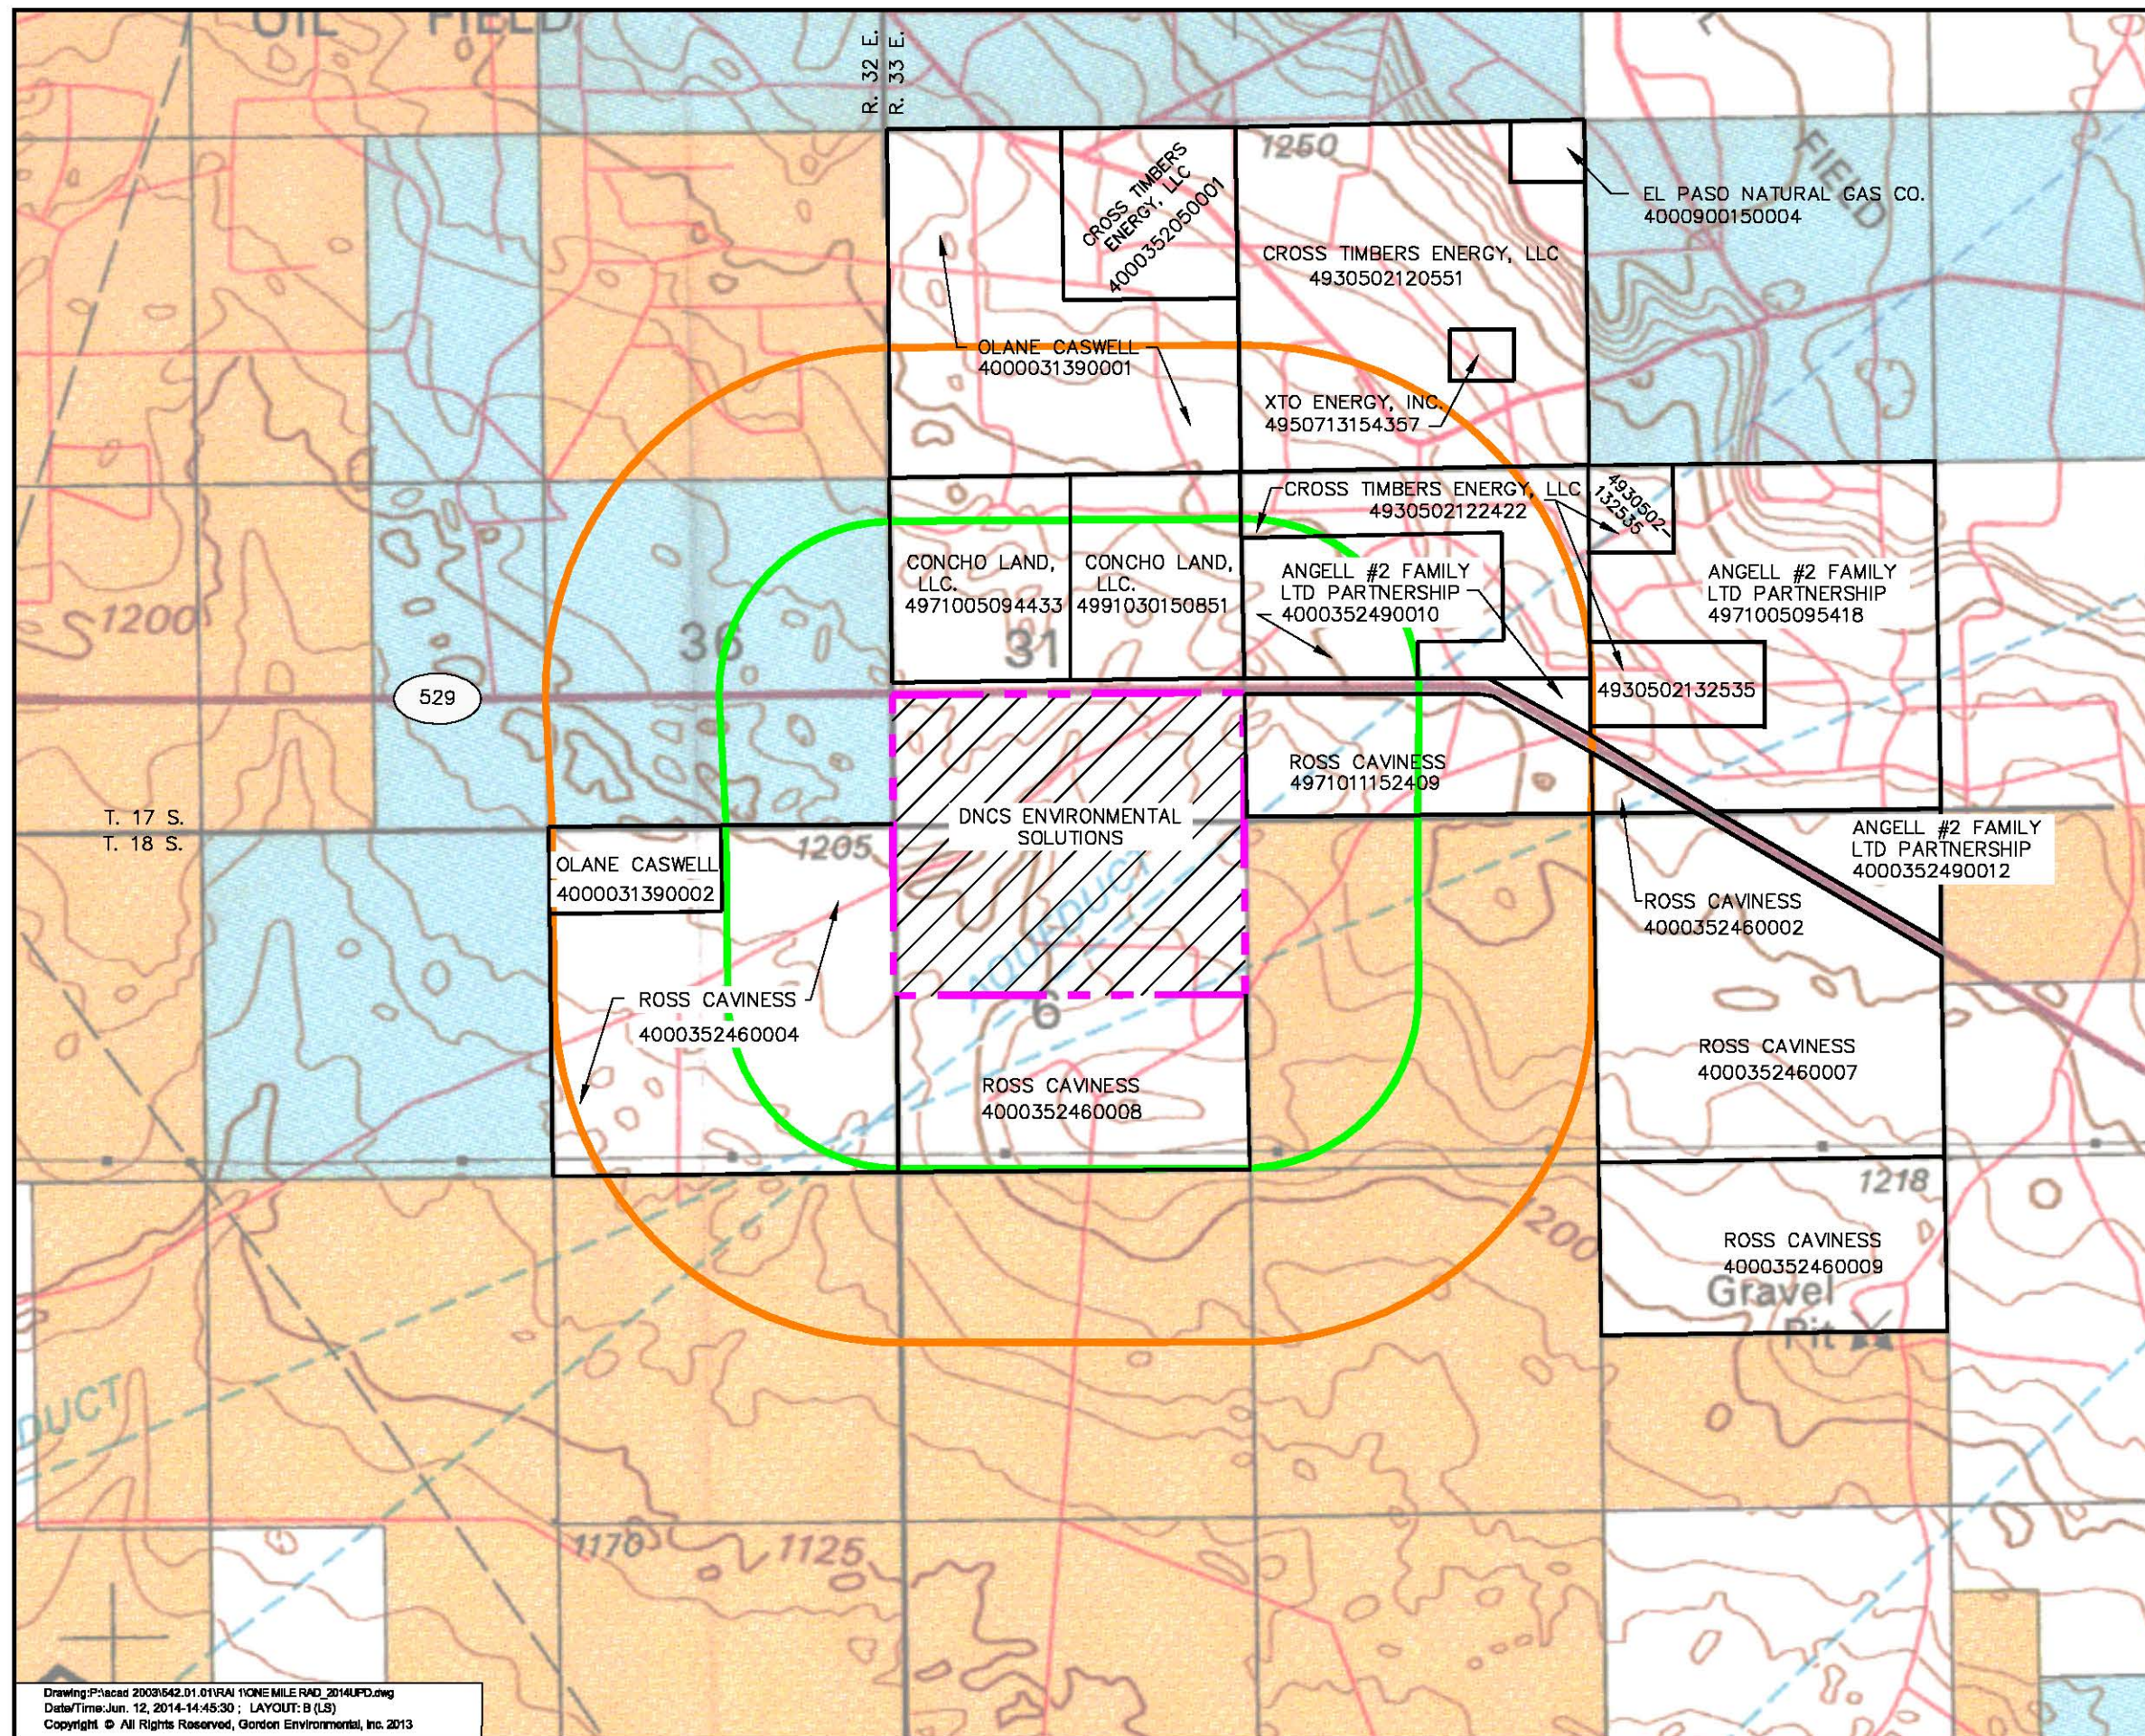

LEGEND


- SITE LOCATION
- PRIVATE LANDS
- PUBLIC LANDS (ADMINISTERED BY BUREAU OF LAND MANAGEMENT)
- STATE LANDS
- 1/2 MILE RADIUS (PUBLIC NOTICE)
- 1 MILE RADIUS

ROSS CAVINESS
497101152409

OWNER NAME
UPC CODE

NOTE:

- 1) LAND OWNERSHIP DATA PROVIDED BY THE LEA COUNTY ASSESSORS OFFICE AND IS CURRENT AS OF MAY 30, 2014. ([HTTP://EMAPS.EMAPSPLUS.COM/STANDARD/LEACONM.HTML](http://EMAPS.EMAPSPLUS.COM/STANDARD/LEACONM.HTML)).
- 2) LAND OWNERSHIP MAP DERIVED FROM THE HOBBS 2001 SURFACE MANAGEMENT STATUS 1:100,000 BLM TOPOGRAPHIC MAP.



1/2 MILE RADIUS MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO

Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8990
Fax: 505-867-8991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 6/12/2014 | GAD: ONE MILE RAD.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: ANY | REVIEWED BY: DRT | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | FIGURE I.A-1 |

Attachment A
Notice of Application

NOTICE OF APPLICATION
DNCS ENVIRONMENTAL SOLUTIONS (DNCS) – SURFACE WASTE MANAGEMENT FACILITY

Pursuant to 19.15.36, Oil Conservation Division Surface Waste Management Facilities regulations, DNCS Environmental Solutions (DNCS) is providing notice that the Oil Conservation Division (OCD) has deemed administratively complete an Application for Permit for a new Surface Waste Management Facility (DNCS Facility). The Application for Permit was originally submitted to OCD by DNCS on 11/07/2013. Comments regarding the Application may be submitted to OCD within 30 days of Notice.

1. **Applicant's name and address:** DNCS Properties, LLC, 2028 E. Hackberry Place, Chandler, AZ 85286; Telephone: 480.437.0044.
2. **Facility location and address:** The proposed DNCS Facility is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.5 miles south of Maljamar, in unincorporated Lea County, New Mexico. The site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM. The Surface Waste Management Facility will comprise 495 acres \pm of the DNCS site.
3. **Brief description of surface waste management facility:** The proposed DNCS Facility will include a liquid oil field waste Processing Area (177 acres \pm) and an oil field waste Landfill (318 acres \pm). At full build-out, the Processing Area will include an oil treatment facility consisting of 9 produced water load-out points, 12 produced water receiving tanks, 48 produced water settling tanks, 12 evaporation ponds, 5 crude oil recovery tanks, and 5 oil sales tanks; as well as 1 stabilization and solidification area; and 1 customer jet wash (6 bays). The Landfill disposal footprint is 234 acres \pm with a waste capacity airspace of approximately 33.7 million cubic yards. In addition, various support facilities, including: a Processing Area Gatehouse, Landfill Scalehouse, waste acceptance/security features, roads, emergency shower and eyewash station, and stormwater detention basins are proposed for the new Facility.
4. **Depth and quality of shallowest aquifer:** Based upon information projected from nearby petroleum wells, the shallowest potential water-bearing zone in the vicinity is the Santa Rosa Sandstone (lower Triassic Chinle), which is approximately 550 feet (ft) below ground surface (bgs) at the DNCS site. In addition, the DNCS site characterization boring investigation results demonstrate that no shallow groundwater is present above a depth of 150 ft bgs at any of the boring locations. The nearest water supply well to the DNCS site (at a distance of about 8 miles) is completed in Triassic bedrock, presumed to be Santa Rosa Sandstone. A chemical analysis of this well, reported by others, indicates a total dissolved solids concentration of 3,680 milligrams per liter (mg/L) and a sulfate concentration of 1,680 mg/L.

Interested parties may contact Dr. Brett F. Woods, Deputy Cabinet Secretary, EMNRD at (505) 476-3200 for further information.

Attachment B
Certified Mailing and Return Receipts

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Concho Land, LLC
P.O. Box 1567
Lovington, NM 88260

COMPLETE THIS SECTION ON DELIVERY

A. Signature

☐ Agent☐ Addressee

B. Received by (Printed Name)

C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee) ☐ Yes

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1904

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

XTO Energy, Inc.
810 Houston Street
Fort Worth, TX 76102

COMPLETE THIS SECTION ON DELIVERY

A. Signature

☐ Agent☐ Addressee

B. Received by (Printed Name)

C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee) ☐ Yes

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1911

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

LOVINGTON NM 88260

| | | |
|--|----|--------|
| Postage | \$ | \$0.49 |
| Certified Fee | | \$3.30 |
| Return Receipt Fee (Endorsement Required) | | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 |
| Total Postage & Fees | \$ | \$6.49 |

Sent To Concho Land, LLC
P.O. Box 1567
Lovington, NM 88260
City, State, ZIP

PS Form 3800

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

FORT WORTH TX 76102

| | | |
|--|----|--------|
| Postage | \$ | \$0.49 |
| Certified Fee | | \$3.30 |
| Return Receipt Fee (Endorsement Required) | | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 |
| Total Postage & Fees | \$ | \$6.49 |

Sent To XTO Energy, Inc.
810 Houston Street
Fort Worth, TX 76102
City, St

PS Form

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Angell #2 Family LTD Partnership
P.O. Box 190
Lovington, NM 88260

COMPLETE THIS SECTION ON DELIVERY

A. Signature  ☐ Agent ☐ Addressee

B. Received by (Printed Name) C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee) ☐ Yes

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1928

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540


SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Ross Caviness
3718 NM 114
Causey, NM 88113

COMPLETE THIS SECTION ON DELIVERY

A. Signature  ☒ Agent ☐ Addressee

B. Received by (Printed Name) C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee) ☐ Yes

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1935

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

LOVINGTON, NM 88260

| | | |
|--|----|--------|
| Postage | \$ | \$0.49 |
| Certified Fee | | \$3.30 |
| Return Receipt Fee (Endorsement Required) | | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 |
| Total Postage & Fees | \$ | \$6.49 |

Sent To Angell #2 Family LTD Partnership
P.O. Box 190
Street, Apt. or PO Box Lovington, NM 88260
City, State,

PS Form 3811

ons

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

CAUSEY, NM 88113

| | | |
|--|----|--------|
| Postage | \$ | \$0.49 |
| Certified Fee | | \$3.30 |
| Return Receipt Fee (Endorsement Required) | | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 |
| Total Postage & Fees | \$ | \$6.49 |

Sent To Ross Caviness
3718 NM 114
Street, Apt. or PO Box Causey, NM 88113
City, State,

PS Form 3811

ons


| SENDER: COMPLETE THIS SECTION | COMPLETE THIS SECTION ON DELIVERY |
|--|---|
| <p>■ Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.</p> <p>■ Print your name and address on the reverse so that we can return the card to you.</p> <p>■ Attach this card to the back of the mailpiece, or on the front if space permits.</p> <p>1. Article Addressed to:</p> <p style="margin-top: 20px;">Olane Caswell 1702 Gillham Drive Brownfield, TX 79316</p> | <p>A. Signature X <i>Lane Mackey</i> <input type="checkbox"/> Agent <input type="checkbox"/> Addressee</p> <p>B. Received by (Printed Name) <i>Lane Mackey</i> C. Date of Delivery <i>3/11/14</i></p> <p>D. Is delivery address different from item 1? <input type="checkbox"/> Yes If YES, enter delivery address below: <input checked="" type="checkbox"/> No</p> <hr/> <p>3. Service Type <input checked="" type="checkbox"/> Certified Mail <input type="checkbox"/> Express Mail <input type="checkbox"/> Registered <input type="checkbox"/> Return Receipt for Merchandise <input type="checkbox"/> Insured Mail <input type="checkbox"/> C.O.D. </p> <p>4. Restricted Delivery? (Extra Fee) <input type="checkbox"/> Yes</p> |
| <p>2. Article Number <u>7012 0470 0002 0483 1942</u> (Transfer from service label)</p> <p>PS Form 3811, February 2004 Domestic Return Receipt 102595-02-M-7-40</p> | |

7012 0470 0002 0483 1942

| U.S. Postal Service™ CERTIFIED MAIL™ RECEIPT (Domestic Mail Only; No Insurance Coverage Provided) | |
|--|---------------|
| For delivery information visit our website at www.usps.com | |
| BROWNFIELD TX 79316 OFFICIAL USE | |
| Postage | \$ \$0.49 |
| Certified Fee | \$3.30 |
| Return Receipt Fee (Endorsement Required) | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | \$0.00 |
| Total Postage & Fees | \$6.49 |
|  | |
| <p>Sent To Olane Caswell 1702 Gillham Drive Brownfield, TX 79316 Street, Apt. or PO Box City, State</p> | |
| PS Form | ctions |

| SENDER: COMPLETE THIS SECTION | COMPLETE THIS SECTION ON DELIVERY |
|--|--|
| <p>■ Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.</p> <p>■ Print your name and address on the reverse so that we can return the card to you.</p> <p>■ Attach this card to the back of the mailpiece, or on the front if space permits.</p> <p>1. Article Addressed to:</p> <p style="margin-top: 20px;">Bureau of Land Management 620 E. Greene Street Carlsbad, NM 88220</p> | <p>A. Signature X <i>[Signature]</i> <input type="checkbox"/> Agent <input type="checkbox"/> Addressee</p> <p>B. Received by (Printed Name) <i>[Signature]</i> C. Date of Delivery <i>3/10/14</i></p> <p>D. Is delivery address different from item 1? <input type="checkbox"/> Yes If YES, enter delivery address below: <input type="checkbox"/> No</p> <hr/> <p>3. Service Type <input checked="" type="checkbox"/> Certified Mail <input type="checkbox"/> Express Mail <input type="checkbox"/> Registered <input type="checkbox"/> Return Receipt for Merchandise <input type="checkbox"/> Insured Mail <input type="checkbox"/> C.O.D. </p> <p>4. Restricted Delivery? (Extra Fee) <input type="checkbox"/> Yes</p> |
| <p>2. Article Number <u>7012 0470 0002 0483 1959</u> (Transfer from service label)</p> <p>PS Form 3811, February 2004 Domestic Return Receipt 102595-02-M-154</p> | |

7012 0470 0002 0483 1959

| U.S. Postal Service™ CERTIFIED MAIL™ RECEIPT (Domestic Mail Only; No Insurance Coverage Provided) | |
|--|---------------|
| For delivery information visit our website at www.usps.com | |
| CARLSBAD NM 88220 OFFICIAL USE | |
| Postage | \$ \$0.49 |
| Certified Fee | \$3.30 |
| Return Receipt Fee (Endorsement Required) | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | \$0.00 |
| Total Postage & Fees | \$6.49 |
|  | |
| <p>Sent To Bureau of Land Management 620 E. Greene Street Carlsbad, NM 88220 Street, Apt. or PO Box City, State</p> | |
| PS Form 3811 | ctions |

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

New Mexico State Land Office
P.O. Box 1148
Santa Fe, NM 87504-1148

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1966

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

COMPLETE THIS SECTION ON DELIVERY

A. Signature

X

- ☐ Agent
☐ Addressee

B. Received by (Printed Name)

C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee)

☐ Yes

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**
(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

SANTA FE NM 87504

| | | | |
|--|----|--------|------|
| Postage | \$ | \$0.49 | 0004 |
| Certified Fee | | \$3.30 | |
| Return Receipt Fee (Endorsement Required) | | \$2.70 | |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 | |
| Total Postage & Fees | \$ | \$6.49 | |

Sent To New Mexico State Land Office SPS
P.O. Box 1148
Santa Fe, NM 87504-1148
Street, Apt. or PO Box
City, State, .

PS Form 38

ons

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Lea County Commission
100 N. Main Street
Lovington, NM 88260

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1973

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

COMPLETE THIS SECTION ON DELIVERY

A. Signature

X

- ☐ Agent
☐ Addressee

B. Received by (Printed Name)

C. Date of Delivery

D. Is delivery address different from item 1? ☐ Yes
If YES, enter delivery address below: ☐ No

3. Service Type

- ☒ Certified Mail ☐ Express Mail
☐ Registered ☐ Return Receipt for Merchandise
☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee)

☐ Yes

**U.S. Postal Service™
CERTIFIED MAIL™ RECEIPT**
(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

LOVINGTON NM 88260

| | | | |
|--|----|--------|--|
| Postage | \$ | \$0.49 | |
| Certified Fee | | \$3.30 | |
| Return Receipt Fee (Endorsement Required) | | \$2.70 | |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 | |
| Total Postage & Fees | \$ | \$6.49 | |

Sent To Lea County Commission
100 N. Main Street
Lovington, NM 88260
Street, Apt. or PO Box
City, State, .

PS Form 38

ons

SENDER: COMPLETE THIS SECTION

- Complete items 1, 2, and 3. Also complete item 4 if Restricted Delivery is desired.
- Print your name and address on the reverse so that we can return the card to you.
- Attach this card to the back of the mailpiece, or on the front if space permits.

1. Article Addressed to:

Lea County Manager
100 N. Main Street
Lovington, NM 88260

2. Article Number

(Transfer from service label)

7012 0470 0002 0483 1980

PS Form 3811, February 2004

Domestic Return Receipt

102595-02-M-1540

COMPLETE THIS SECTION ON DELIVERY

A. Signature

X Jessica Garcia

☐ Agent

☐ Addressee

B. Received by (Printed Name)

Jessica Garcia

C. Date of Delivery

3-10-14

D. Is delivery address different from item 1? ☐ Yes

If YES, enter delivery address below: ☐ No

3. Service Type

☒ Certified Mail ☐ Express Mail

☐ Registered

☐ Return Receipt for Merchandise

☐ Insured Mail ☐ C.O.D.

4. Restricted Delivery? (Extra Fee)

☐ Yes

U.S. Postal Service™


CERTIFIED MAIL™ RECEIPT

(Domestic Mail Only; No Insurance Coverage Provided)

For delivery information visit our website at www.usps.com

LOVINGTON NM 88260

| | | |
|---|----|--------|
| Postage | \$ | \$0.49 |
| Certified Fee | | \$3.30 |
| Return Receipt Fee (Endorsement Required) | | \$2.70 |
| Restricted Delivery Fee (Endorsement Required) | | \$0.00 |
| Total Postage & Fees | \$ | \$6.49 |



03/07/2014

Sent To Lea County Manager
100 N. Main Street
Lovington, NM 88260
Street, Apt. or PO Box
City, State,

PS Form 3811

ions

7012 0470 0002 0483 1980

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**

**ATTACHMENT I.B
FINANCIAL ASSURANCE
TO BE PROVIDED UPON PERMIT APPROVAL**


**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME I: PERMIT APPLICATION TEXT
PART 36: SURFACE WASTE MANAGEMENT FACILITIES**

**ATTACHMENT I.C
BOUNDARY SURVEY
(PETTIGREW & ASSOCIATES PA, 12/13/2012)**

BOUNDARY SURVEY

LOCATED IN PART OF THE S1/2, OF SECTION 31, T17S, R33E, AND N1/2 SECTION 6, T18S, R33E, N.M.P.M., LEA COUNTY, NEW MEXICO

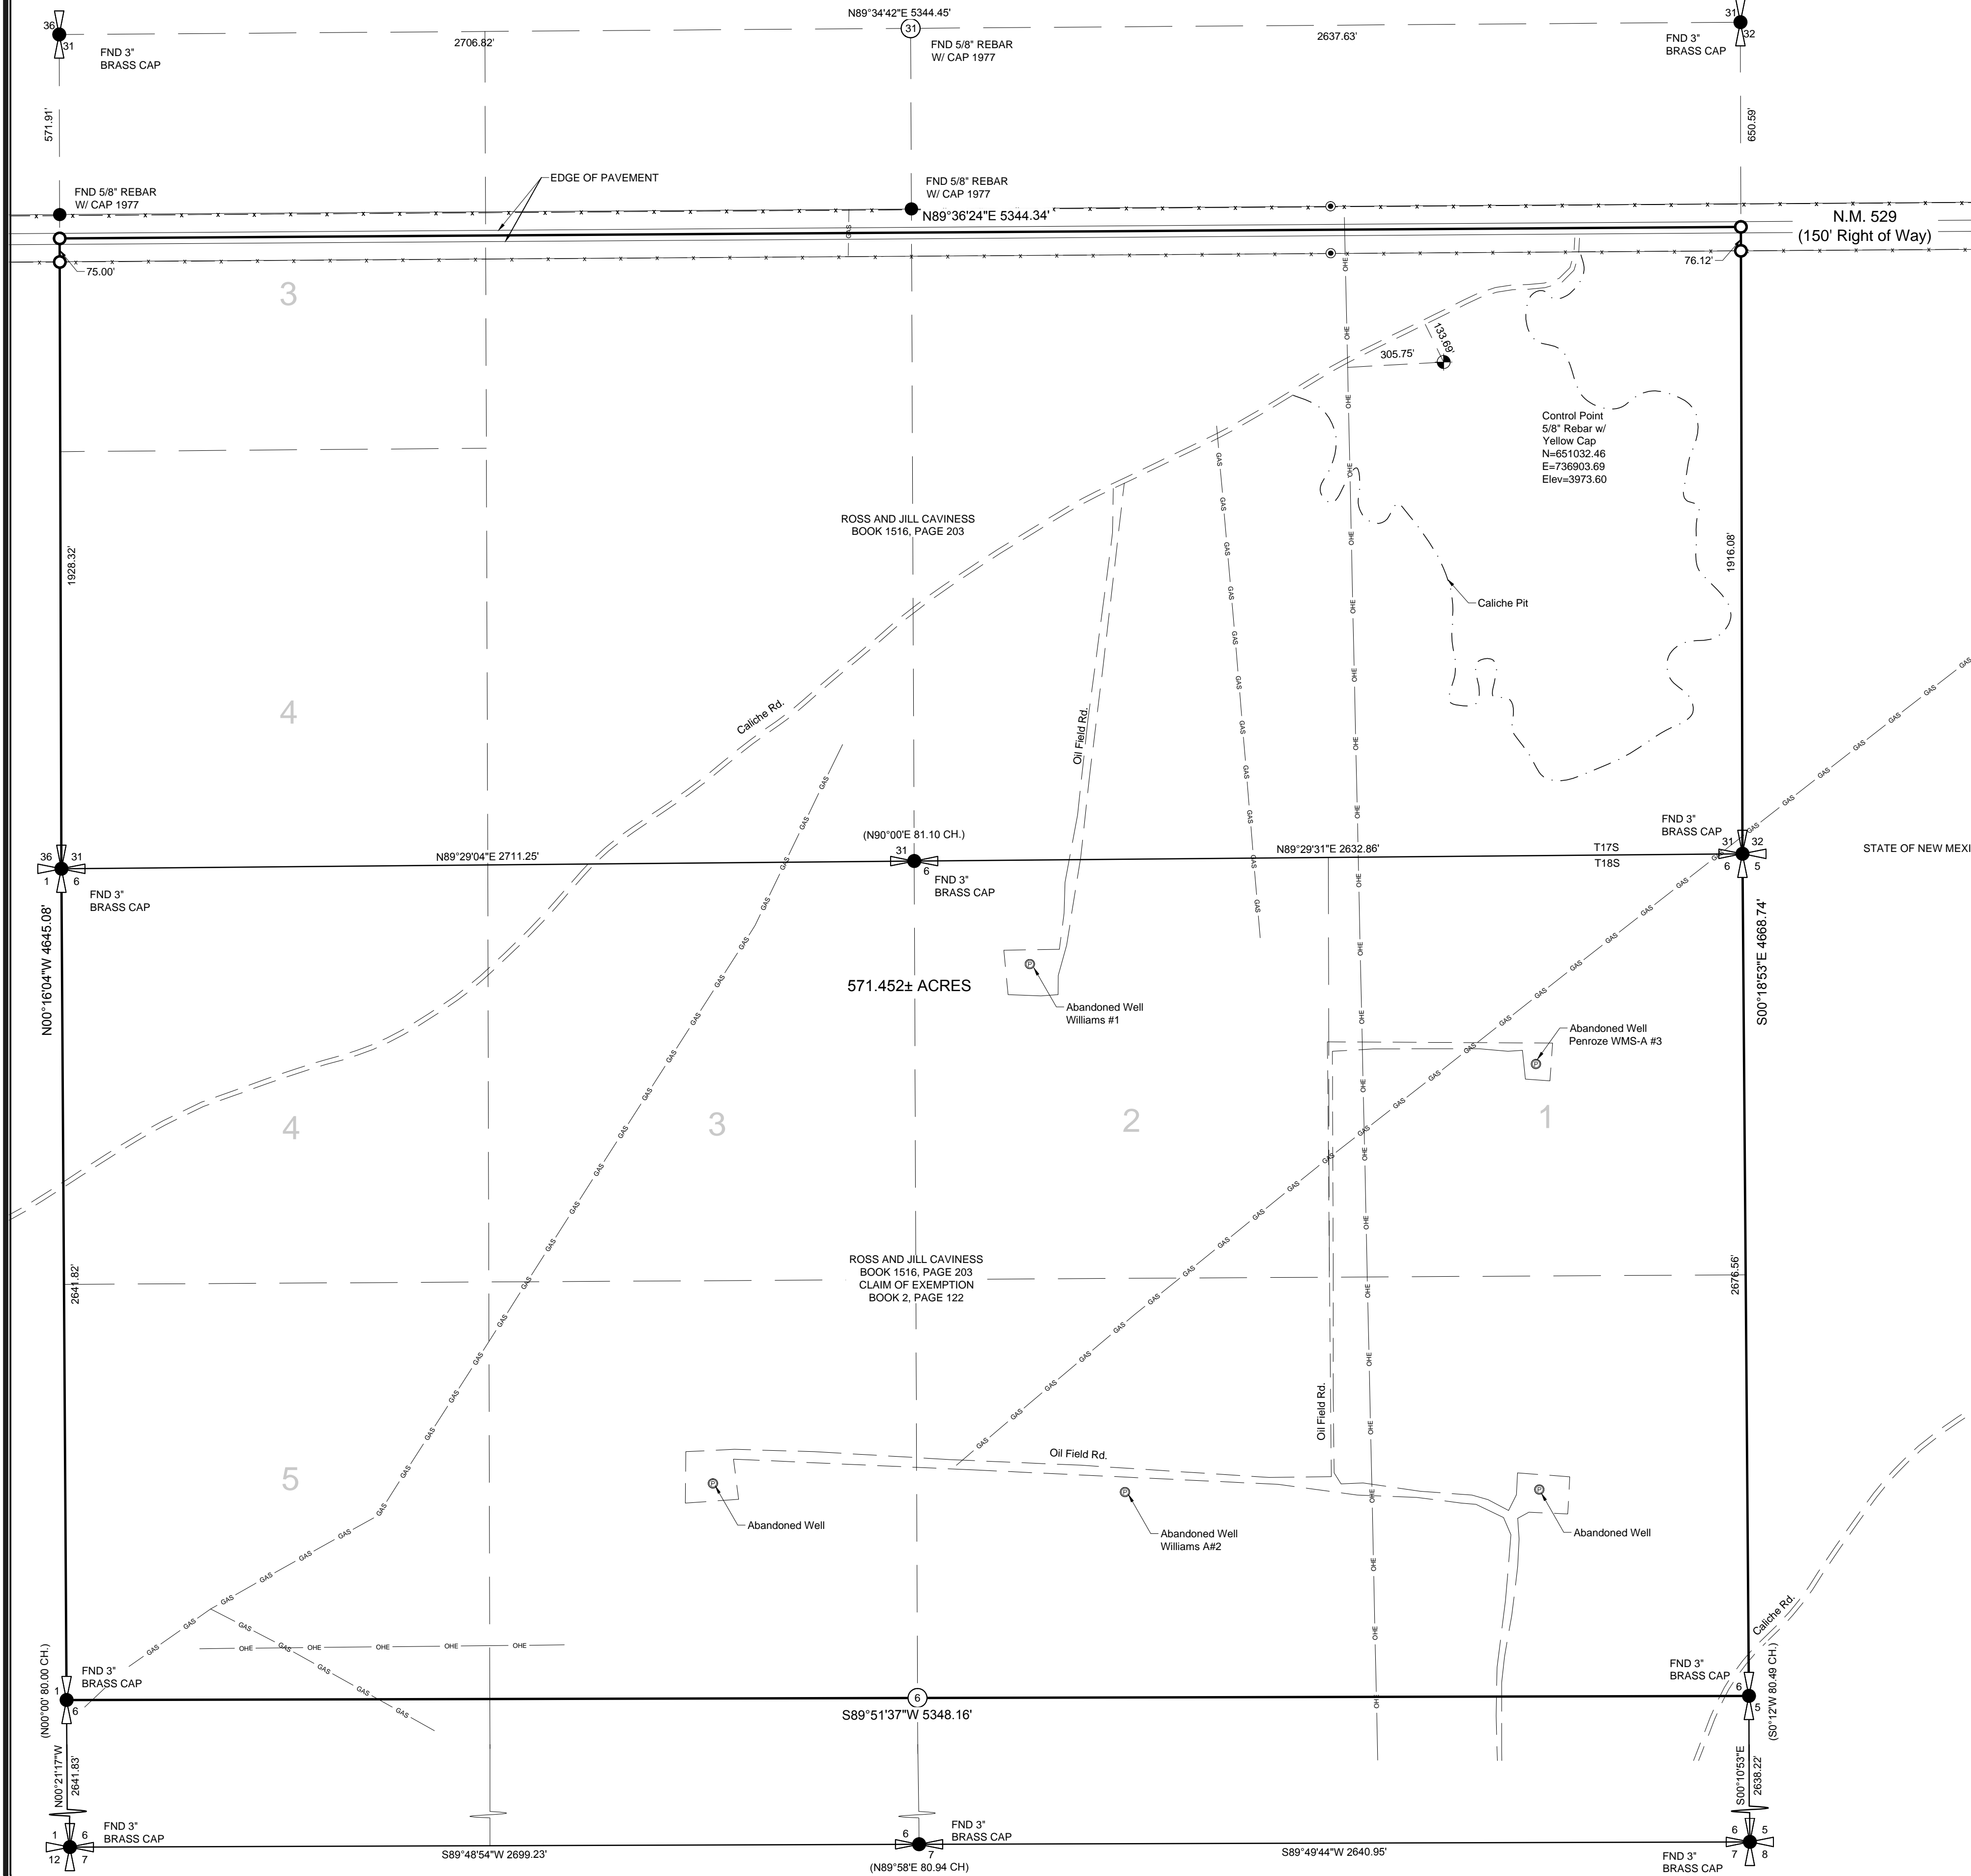

RECORD DESCRIPTION AS RECORDED IN BOOK 1516, PAGE 203, LEA COUNTY RECORDS

The Southwest Quarter of the Southwest Quarter (SW/4SW/4), the Northwest Quarter of the Northwest Quarter (NW/4NW/4), the East Half of the Northwest Quarter (E2NW/4), the West Half of the Northeast Quarter (W/2NE/4) of Section 15 and All of Section 16, all in Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico.

The East Half (E/2), the Southwest Quarter (SW/4) and the South Half of the Northwest Quarter (S/2NW/4) of Section 1; the Southwest Quarter (SW/4) of Section 14; the Northeast Quarter (NE/4) of Section 22; the Northwest Quarter (NW/4) of Section 23; and the East Half of the Northeast Quarter (E/2NE/4) of Section 34, all in Township 18 South, Range 32 East, N.M.P.M., Lea County, New Mexico.

The North Half (N/2) of Section 9; all of Section 6, all in Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico.

Section 31, 32 & 33, Township 17 South, Range 33 East and Section 3, 4, 10 & 11, Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico, lying South of the pavement centerline of State Highway #529.

SURVEYED DESCRIPTION

A tract of land located in the Section 31, T17S, R33E, and Section 6, T18S, R33E, N.M.P.M., Lea County, New Mexico and being more particularly described as follows:

That part of the S1/2 of Section 31, T17S, R33E, lying south of the centerline of the pavement in New Mexico State Highway 529 and the North 1/2 of Section 6, T18 S, R33 E, N.M.P.M., Lea County, New Mexico, as shown on an exemption plat recorded in Book 2, Page 122, Lea County Records, and containing 562.367 acres, more or less.

BASIS OF BEARING

The basis of bearing for this survey is Grid North based on the New Mexico State Plane Coordinate System East Zone, as determined by an OPUS solution at the control point shown on survey plat. Coordinates are based on the New Mexico State Plane Coordinate System East Zone. Ground coordinates are modified by scaling about a control point located at N32°47'17.17235", W103°41'49.02833" by a combined scale factor of 0.99976629. All drawing coordinates are scaled to ground. Elevations shown hereon are referenced to NAVD 1988. This map complies with the National Map Accuracy Standards.

CERTIFICATE OF SURVEY

I, William M. Hicks III, New Mexico Professional Surveyor, hereby certify that this Boundary Survey Plat was prepared from an actual ground survey performed by me or under my supervision, that this survey is true and correct to the best of my knowledge and belief, that this Boundary Plat and the field survey upon which it is based meet the Minimum Standards for Surveying in New Mexico.

William M. Hicks III
William M. Hicks, III NMPS #12348

December 13, 2012
Date

NOTE

Boundary Survey was performed without Title Commitment.

| LEGEND | |
|--------|---|
| | Found as noted |
| | Set 5/8" rebar with red plastic cap marked "HICKS NMPS 12348" |
| | Calculated point |
| | Section corner |
| | Quarter section corner |
| | Found section corner |
| | Found quarter section corner |
| | Section section corner |
| | Right of way marker |
| | Barbed wire fence |
| | Measured bearing and distance |
| | Record GLO bearing and distance |

State of New Mexico, County of _____
I hereby certify that this instrument was filed for record on:

The _____ Day of _____,

20 _____ A.D.

At _____ O'Clock _____ M.

Cabinet _____ Slide _____

Book _____ Page _____

By _____

County Clerk


By _____

Deputy

PETTIGREW
& ASSOCIATES PA
ENGINEERING | SURVEYING | TESTING
DEFINING QUALITY SINCE 1965
100 E. Navajo, Suite 100 Hobbs New Mexico 88240
T 575 393 9827 F 575 393 1543
Pettigrew.us



PROJECT SURVEYOR: M. Ivey
DRAWN BY: C. Johnson

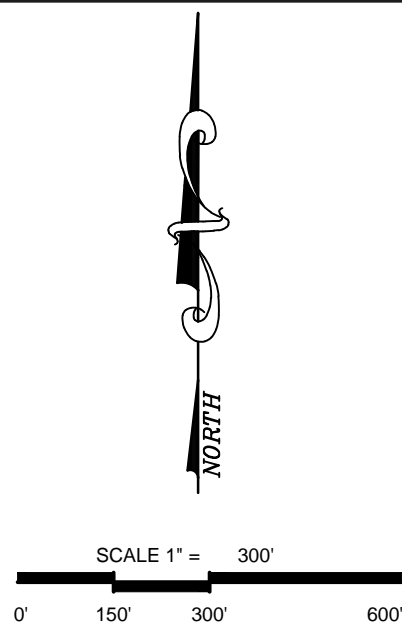

INDEXING INFORMATION FOR COUNTY CLERK

OWNER:

ROSS CAVINESS

LOCATION:

PART OF THE S1/2, SECTION 31, T17S, R33E, SOUTH OF HWY. 529, AND N1/2, SECTION 6, T18S, R33E, N.M.P.M., LEA COUNTY, NEW MEXICO

REVISIONS

| No. | DATE | DESCRIPTION |
|-----|------|-------------|
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

BOUNDARY SURVEY

OF

Part of the S1/2, Sec 31
T17S, R33E, & N1/2, Sec 6
T18S, R33E, N.M.P.M.

FOR

DNCS PROPERTIES


PROJECT NUMBER:
2012.1258

SHEET:
1 of 1


SU - 101

BOUNDARY SURVEY FOR CLAIM OF EXEMPTION

LOCATED IN THE N1/2, OF SECTION 6,
T18S, R33E, N.M.P.M., LEA COUNTY, NEW MEXICO

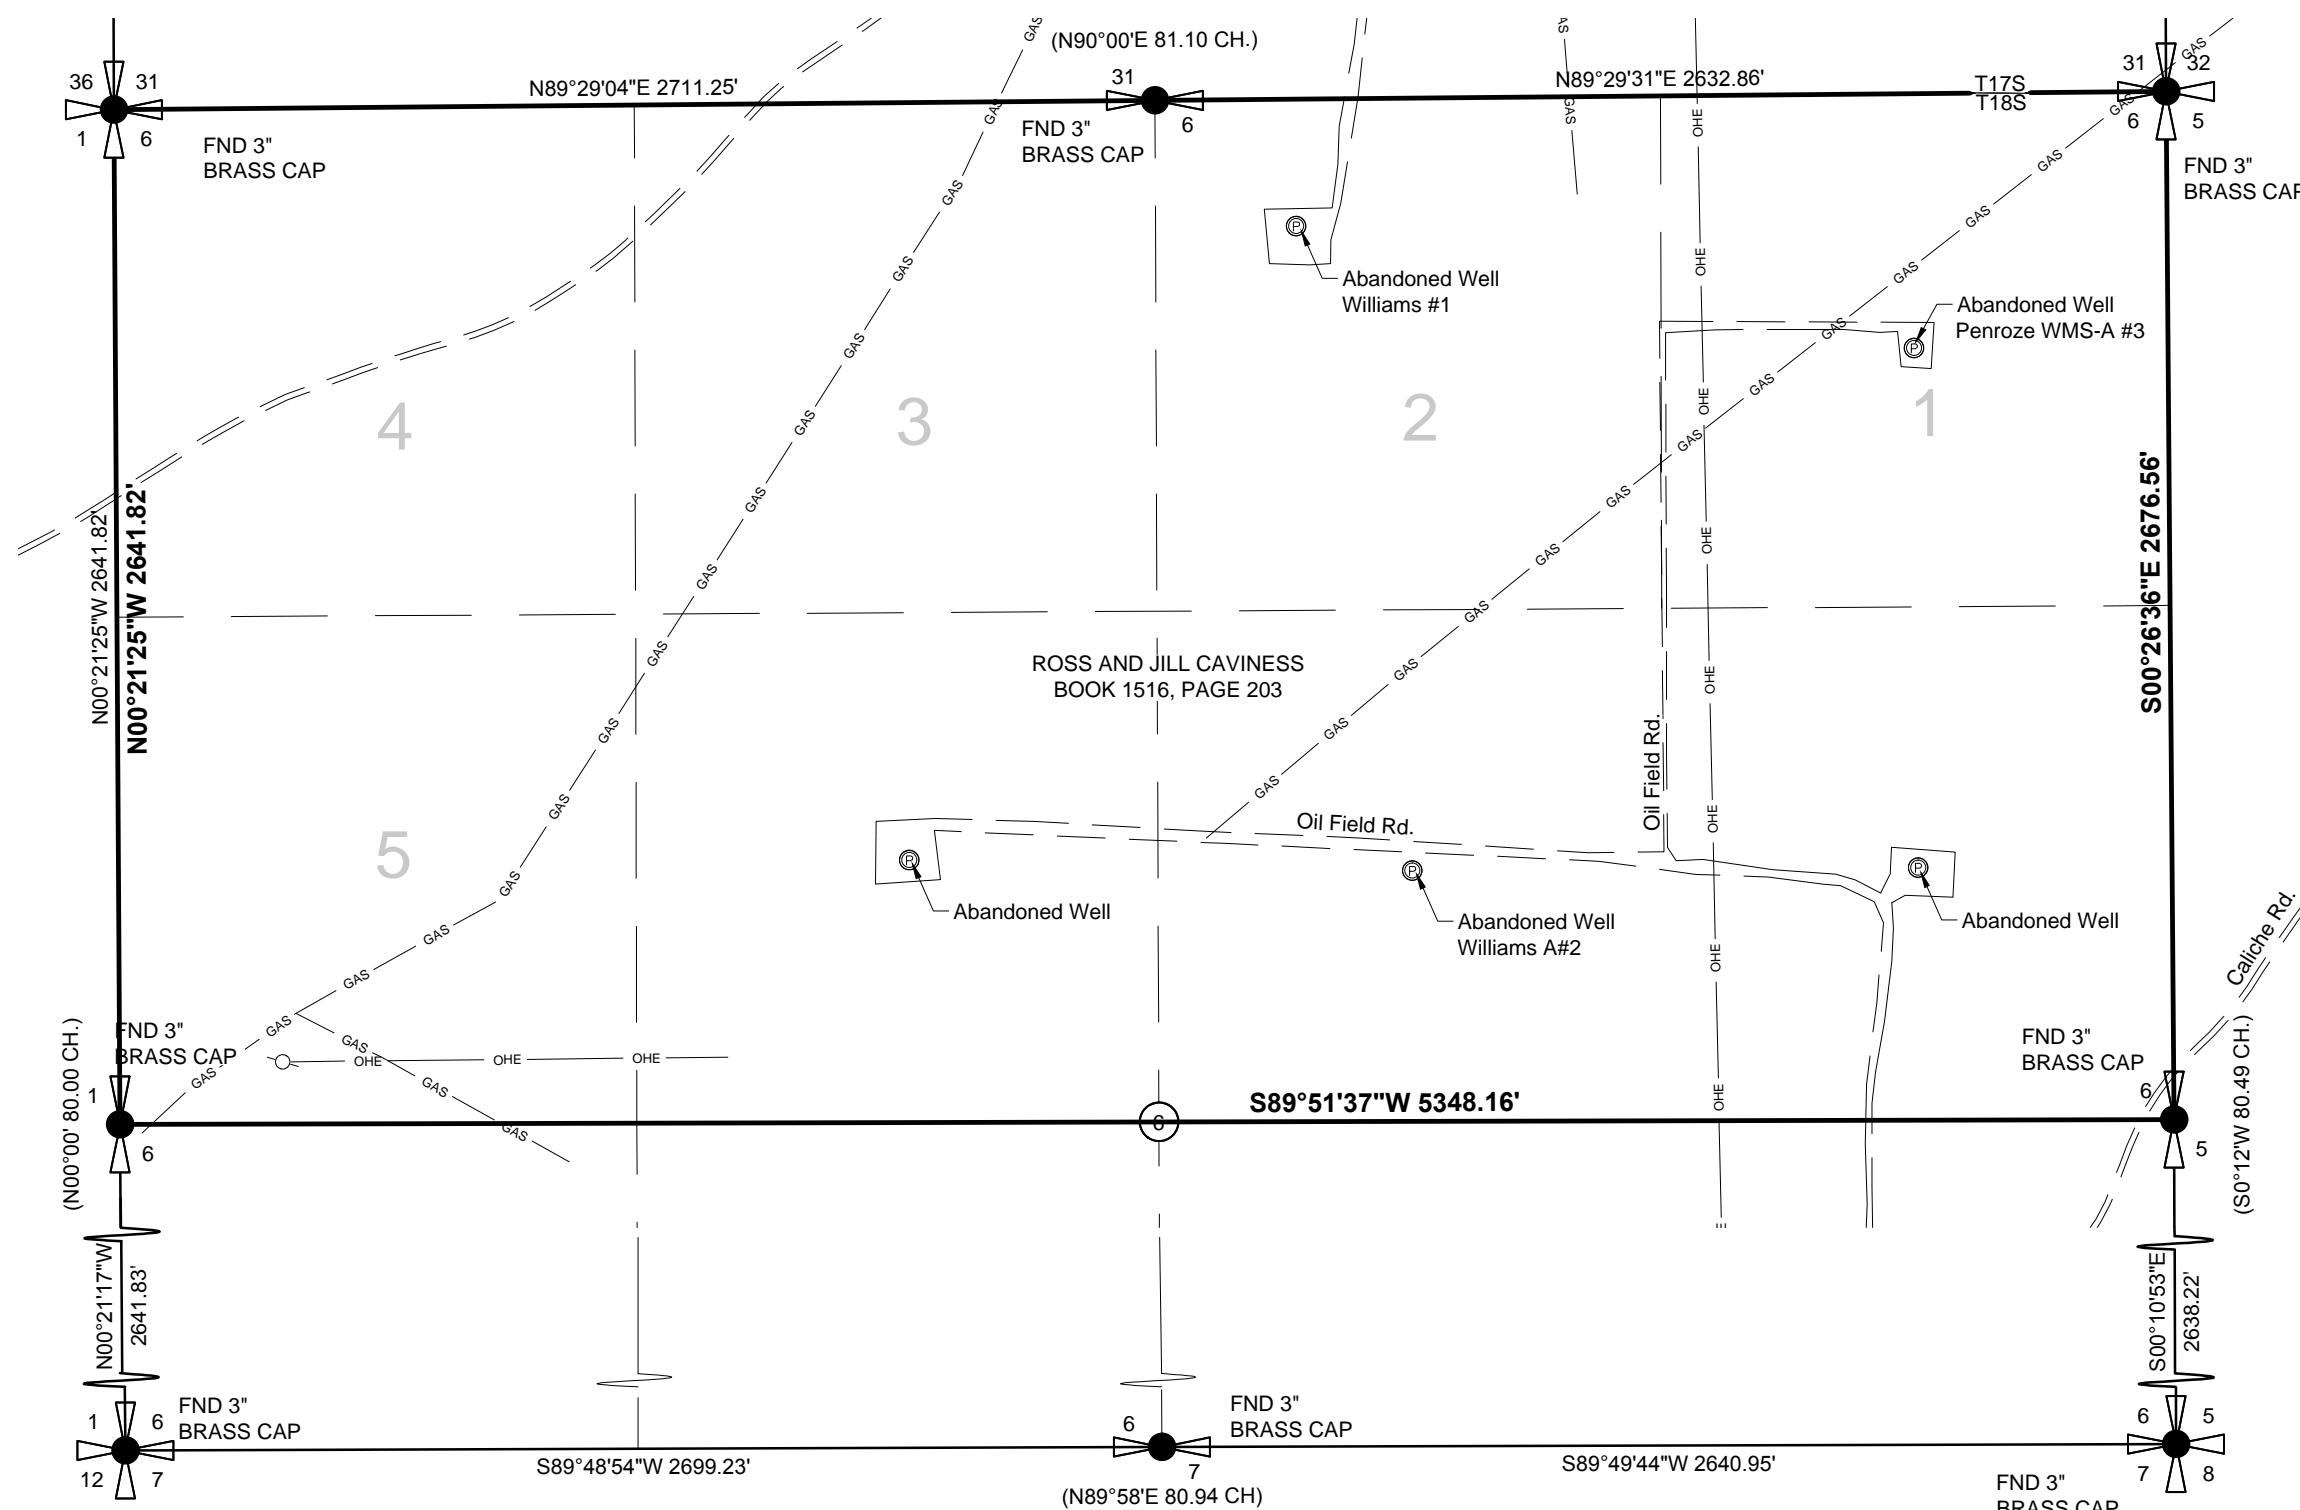

SCALE 1" = 500'

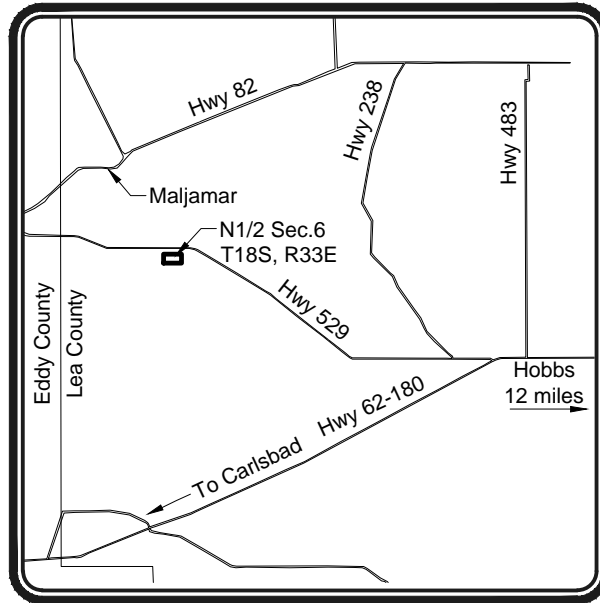

| LEGEND | |
|-------------------|---|
| ● | Found as noted |
| ○ | Set 5/8" rebar with red plastic cap marked "HICKS NMPS 12348" |
| □ | Calculated point |
| + | Section corner |
| + | Quarter section corner |
| + | Found section corner |
| + | Found quarter section corner |
| + | Section section corner |
| x | Barbed wire fence |
| XX"XXX" XX.XX' | Measured bearing and distance |
| (X"XX' XX.XX CH.) | Record GLO bearing and distance |

CLAIM OF EXEMPTION

LEA COUNTY SUBDIVISION REGULATIONS

Article 2: Definition

- The sale, lease or other conveyance of any parcel that is thirty-five acres or larger in size within any twelve month period, provided that the land has been used primarily and continuously for agricultural purposes, in accordance with Section 7-36-20 NMSA 1978, for the preceding three years.

BASIS OF BEARING

The basis of bearing for this survey is Grid North based on the New Mexico State Plane Coordinate System East Zone, as determined by an OPUS solution at the control point shown on survey plat. Coordinates are based on the New Mexico State Plane Coordinate System East Zone. Ground coordinates are modified by scaling about a control point located at N32°47'17.17235", W103°41'49.02833" by a combined scale factor of 0.99976629. All drawing coordinates are scaled to ground. Elevations shown hereon are referenced to NAVD 1988. This map complies with the National Map Accuracy Standards.



ENGINEERING | SURVEYING | TESTING
DEFINING QUALITY SINCE 1965

1110 North Grimes Street Hobbs New Mexico 88240
T 575 393 9827 F 575 393 1543
Pettigrew.us

PROJECT SURVEYOR: M. Ivey
DRAWN BY: C. Johnson



INDEXING INFORMATION FOR COUNTY CLERK

OWNERS:
Ross and Jill Caviness

LOCATION:
N1/2, Section 6, T18S, R33E, N.M.P.M.,
Lea County, New Mexico

REVISIONS

| No. | DATE | DESCRIPTION |
|-----|------|-------------|
| | | |
| | | |
| | | |

State of New Mexico, County of _____,
I here by certify that this instrument was filed for
record on:

The _____ Day of _____,
20 _____ A.D.
At _____ O'Clock _____ M.
Cabinet _____ Slide _____
Book _____ Page _____
By _____
County Clerk
By _____
Deputy

BOUNDARY SURVEY FOR CLAIM OF EXEMPTION

FOR
DNCS Properties

PROJECT NUMBER:
2012.1258

SHEET: 1 of 2
SU - 101

\\DISKSTATION\DataFiles-NAS\2012.1258\DNCS_Survey\ACAD_DNCS\Acad Exemption Plat Grnd.dwg 10/7/2013 3:27 PM

RECORD DESCRIPTION AS RECORDED IN BOOK 1516, PAGE 203, LEA COUNTY RECORDS

The Southwest Quarter of the Southwest Quarter (SW/4SW/4), the Northwest Quarter of the Northwest Quarter (NW/4NW/4), the East Half of the Northwest Quarter (E2NW/4), the West Half of the Northeast Quarter (W/2NE/4) of Section 15 and All of Section 16, all in Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico.

The East Half (E/2), the Southwest Quarter (SW/4) and the South Half of the Northwest Quarter (S/2NW/4) of Section 1; the Southwest Quarter (SW/4) of Section 14; the Northeast Quarter (NE/4) of Section 22; the Northwest Quarter (NW/4) of Section 23; and the East Half of the Northeast Quarter (E/2NE/4) of Section 34, all in Township 18 South, Range 32 East, N.M.P.M., Lea County, New Mexico.

The North Half (N/2) of Section 9; all of Section 6, all in Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico.

Section 31, 32 & 33, Township 17 South, Range 33 East and Section 3, 4, 10 & 11, Township 18 South, Range 33 East, N.M.P.M., Lea County, New Mexico, lying South of the pavement centerline of State Highway #529.

SURVEYED DESCRIPTION

A tract of land located in Section 6, T18S, R33E, N.M.P.M., Lea County, New Mexico and being more particularly described as follows:

The North 1/2 of Section 6, T18 S, R33 E, N.M.P.M., Lea County, New Mexico and containing 326.372 acres, more or less.

CERTIFICATE OF SURVEY

I, William M. Hicks, III, New Mexico Professional Surveyor, hereby certify that this Boundary Survey Plat was prepared from an actual ground survey performed by me or under my supervision, that this survey is true and correct to the best of my knowledge and belief. That this Boundary Survey Plat and the field survey upon which it is based meet the Minimum Standards for Surveying in New Mexico.

William M. Hicks, III NMPS #12348

DECEMBER 12, 2012
Date

NOTE

Boundary Survey was performed without Title Commitment.

OWNERS STATEMENT AND AFFIDAVIT

State of New Mexico §
County of Lea §

The undersigned first duly sworn on oath, state: As the owners and proprietors we have of our own free will and consent caused this plat with its tracts to be platted. The property described on this plat lies within the platting jurisdiction of Lea County New Mexico.

This the 19 day of December, 2012.

By Ross and Jill Caviness

Ross Caviness

Ross Caviness

Jill Caviness

ACKNOWLEDGMENT

State of New Mexico §
County of Lea §

On this the 19 day of December, 2012, before me appeared,

Ross and Jill Caviness known to me to be the persons described in and who executed the foregoing instrument and acknowledged that they executed the same as their free act and deed.

Witness my hand and official seal the day and year last above written.

My Commission Expires: December 31, 2014

Notary Public: Jessica Garcia

Certificate of Approval of Exemption to Subdivision Regulations by Lea County

Pursuant to Lea County Subdivision Regulations, Section 7.5 (1997) the Plat and Claim of Exemption meet the criteria for the sale, lease or other conveyance of any parcel that is thirty-five acres or larger in size within any twelve month period, provided that the land has been used primarily and continuously for agricultural purposes, in accordance with Section 7-36-20 NMSA 1978, for the preceding three years and is approved for a Claim of Exemption

on this 21st day of December, 2012 A.D.

LEA COUNTY, NEW MEXICO

By Mike Gallagher, County Manager

ACKNOWLEDGMENT

State of New Mexico §
County of Lea §

On this the 21st day of December, 2012, before me appeared,

Michael Gallagher known to me to be the persons described in and who executed the foregoing instrument and acknowledged that they executed the same as their free act and deed.

Witness my hand and official seal the day and year last above written.

My Commission Expires: 9-4-14

Jessica Garcia
Notary Public



ENGINEERING | SURVEYING | TESTING
DEFINING QUALITY SINCE 1965

1110 North Grimes Street Hobbs New Mexico 88240
T 575 393 9827 F 575 393 1543
Pettigrew.us

PROJECT SURVEYOR: M. Ivey
DRAWN BY: C. Johnson



INDEXING INFORMATION FOR COUNTY CLERK

OWNERS:
Ross and Jill Caviness

LOCATION:
N1/2, Section 6, T18S, R33E, N.M.P.M.,
Lea County, New Mexico

REVISIONS

| No. | DATE | DESCRIPTION |
|-----|------|-------------|
| | | |
| | | |
| | | |

State of New Mexico, County of Lea,
I here by certify that this instrument was filed for
record on:

The 21st Day of December,
20 12 A.D.
At 4:36 O'Clock P.M.
Cabinet E Slide 172
Book 2 Page 122
By Jessica Garcia
County Clerk
By Deputy

BOUNDARY SURVEY FOR CLAIM OF EXEMPTION

FOR
DNCS Properties

PROJECT NUMBER:
2012.1258

SHEET: 1 of 2
SU - 101

\\DISKSTATION\DataFiles-NAS\2012.1258\DNCS_Survey\ACAD_DNCS\Acad Exemption Plat Grnd.dwg 10/7/2013 3:27 PM

NM1-57

Revised Permit Application

June 2014

Volume 2, Part 1 of 2: Facility Management Plans

**STATE OF NEW MEXICO
DIRECTOR OF OIL CONSERVATION DIVISION**

**IN THE MATTER OF THE
APPLICATION OF DNCS
PROPERTIES, LLC FOR A
SURFACE WASTE MANAGEMENT
FACILITY PERMIT**

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**NOVEMBER 2013
(UPDATED JUNE 2014)**

VOLUME II: FACILITY MANAGEMENT PLANS

Prepared For:

**DNCS Properties, LLC
2028 E. Hackberry Place
Chandler, AZ 85286
480.437.0044**

Submitted To:

**New Mexico Energy, Minerals, and Natural Resources Department
Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505
505.476.3440**

Prepared By:

**Gordon Environmental, Inc.
213 S. Camino del Pueblo
Bernalillo, NM 87004
505.867.6990**

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

TABLE OF CONTENTS

**CERTIFICATION OF APPLICATION
CERTIFICATION OF SERVICE
C-137 APPLICATION FOR SURFACE WASTE MANAGEMENT FACILITY**

VOLUME I: PERMIT APPLICATION TEXT

| <u>Section</u> | <u>Title</u> |
|-----------------------|-------------------------------------|
| 19.15.36 | Surface Waste Management Facilities |

VOLUME II: FACILITY MANAGEMENT PLANS

| <u>Section</u> | <u>Title</u> |
|-----------------------|---|
| 1 | Operations, Inspection, and Maintenance Plan |
| 2 | Oil Field Waste Management Plan |
| 3 | Hydrogen Sulfide (H ₂ S) Prevention and Contingency Plan |
| 4 | Closure/Post-Closure Plan |
| 5 | Contingency Plan |
| 6 | Migratory Bird Protection Plan |
| 7 | Liner Construction Quality Assurance (CQA) Plan |
| 8 | Vadose Zone Monitoring Plan |
| 9 | Leachate Management Plan |

VOLUME III: ENGINEERING DESIGN AND CALCULATIONS

| <u>Section</u> | <u>Title</u> |
|-----------------------|--|
| 1 | Engineering Design |
| 2 | Volumetrics Calculations |
| 3 | Drainage Calculations |
| 4 | HELP Model |
| 5 | Pipe Loading Calculations |
| 6 | Geosynthetic Application and Compatibility Documentation |
| 7 | Tensile Stress Analysis |
| 8 | Erosion Calculations |
| 9 | Settlement Calculations |
| 10 | Evaporation Pond Calculations |
| 11 | Wave Action Calculations |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

TABLE OF CONTENTS (cont.)

VOLUME IV: SITING AND HYDROGEOLOGY

| <u>Section</u> | <u>Title</u> |
|-----------------------|---------------------|
| 1 | Siting Criteria |
| 2 | Hydrogeology |

LIST OF PERMIT PLANS

| <u>Sheet</u> | <u>Title</u> |
|---------------------|---|
| 1 | Cover Sheet and Drawing Index |
| 2 | Existing Site Conditions |
| 3 | Site Development Plan |
| 4 | Landfill Base Grading Plan |
| 5 | Landfill Final Grading Plan |
| 6 | Landfill Cross Sections |
| 7 | Landfill Completion Drainage Plan |
| 8 | Liner System and Cover Details |
| 9 | Leachate Collection System Details |
| 10 | Stormwater Drainage Details |
| 11 | Processing Area Layout |
| 12 | Evaporation Pond Details |
| 13 | Evaporation Pond and Stabilization/Solidification Area Cross Sections |
| 14 | Processing Area Cross Sections |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-------------|
| 1.0 | INTRODUCTION | II.1-1 |
| 1.1 | Purpose | II.1-1 |
| 1.2 | Site Location | II.1-1 |
| 1.3 | Facility Description | II.1-3 |
| 2.0 | GENERAL FACILITY INFORMATION..... | II.1-7 |
| 2.1 | Land Use and Zoning | II.1-7 |
| 2.2 | Access Control | II.1-7 |
| 2.3 | Site Signs..... | II.1-7 |
| 2.4 | Traffic | II.1-10 |
| 3.0 | FACILITY PERSONNEL | II.1-10 |
| 3.1 | Requirements and Duties | II.1-10 |
| 3.2 | Training Requirements | II.1-13 |
| 4.0 | FACILITY OPERATIONAL PROCEDURES | II.1-13 |
| 4.1 | Noise Control | II.1-13 |
| 4.2 | Odor Control | II.1-14 |
| 4.3 | Dust Control | II.1-14 |
| 4.4 | Minor Spills/Releases..... | II.1-15 |
| 5.0 | LANDFILL OPERATIONS | II.1-16 |
| 5.1 | Landfill Equipment | II.1-16 |
| 5.2 | Waste Characteristics | II.1-17 |
| 5.3 | Sequence of Landfill Development..... | II.1-18 |
| 5.4 | Daily Landfill Operating Procedures | II.1-19 |
| 5.5 | Waste Capacity and Longevity | II.1-22 |
| 5.6 | Landfill Gas Safety Management..... | II.1-23 |
| 5.7 | Leachate Monitoring | II.1-24 |
| 5.8 | Waste Disposal Alternatives | II.1-25 |
| 5.9 | Operating Hours | II.1-25 |
| 6.0 | LIQUID WASTE PROCESSING..... | II.1-26 |
| 6.1 | Operational Rate..... | II.1-26 |
| 6.2 | Processing..... | II.1-26 |
| 7.0 | FACILITY INSPECTION AND MAINTENANCE | II.1-29 |
| 7.1 | Mechanical Evaporation System (Processing Area) | II.1-31 |

APPLICATION FOR PERMIT DNCS ENVIRONMENTAL SOLUTIONS

VOLUME II: FACILITY MANAGEMENT PLANS SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN

| | | |
|-----|--|---------|
| 7.2 | Solid Waste Disposal Landfill | II.1-31 |
| 7.3 | Overall Facility Operation..... | II.1-31 |
| 7.4 | Treatment Plant, Tanks and Sumps (Processing Area) | II.1-32 |
| 7.5 | Tank Farm and Pump System (Processing Area)..... | II.1-32 |
| 7.6 | Pit and Pond Operation (Processing Area)..... | II.1-33 |
| 7.7 | Pond Containment System (Processing Area) | II.1-34 |
| 7.8 | Below-grade Tanks and Sumps..... | II.1-34 |
| 8.0 | EMERGENCY SITUATIONS AND EQUIPMENT BREAKDOWN | II.1-34 |
| 8.1 | Equipment Breakdown..... | II.1-34 |
| 9.0 | RECORD KEEPING REQUIREMENTS | II.1-35 |

LIST OF FIGURES

| Figure No. | Title | Page |
|------------|---|---------|
| II.1.1 | SITE LOCATION MAP | II.1-2 |
| II.1.2 | SITE PLAN..... | II.1-4 |
| II.1.3A | SITE ENTRANCE SIGN (TYPICAL) | II.1-8 |
| II.1.3B | SITE SIGNS (TYPICAL) | II.1-9 |
| II.1.4A | PROCESSING AREA TRAFFIC FLOW PLAN | II.1-11 |
| II.1.4B | LANDFILL TRAFFIC FLOW PLAN..... | II.1-12 |
| II.1.5A | PROCESS FLOW DIAGRAM..... | II.1-20 |
| II.1.5B | PROCESS FLOW DESCRIPTION | II.1-21 |
| II.1.6 | PROCESS FACILITY LAYOUT..... | II.1-27 |

LIST OF TABLES

| Table No. | Title | Page |
|-----------|---|---------|
| II.1.1 | OCD REQUIREMENTS: 19.15.36 NMAC | II.1-3 |
| II.1.2 | PROPOSED FACILITIES..... | II.1-5 |
| II.1.3 | DNCS DEVELOPMENT SEQUENCE | II.1-6 |
| II.1.4 | FACILITY STAFFING LIST | II.1-10 |
| II.1.5 | DUST CONTROL | II.1-14 |
| II.1.6 | LANDFILL EQUIPMENT (TYPICAL) | II.1-17 |
| II.1.7 | LANDFILL WASTE CHARACTERIZATION AND ANTICIPATED DAILY WASTE RECEIPTS | II.1-17 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

| | | |
|---------|------------------------------------|---------|
| II.1.8 | LANDFILL DEVELOPMENT SEQUENCE..... | II.1-18 |
| II.1.9 | PROCESSING EQUIPMENT | II.1-26 |
| II.1.10 | FACILITY INSPECTIONS..... | II.1-30 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| II.1.A | SAFETY COMMUNICATIONS PROGRAM (TYPICAL) |
| II.1.B | EQUIPMENT SPECIFICATIONS |
| II.1.C | INSPECTION FORM (TYPICAL) |
| II.1.D | POND INTEGRITY/LEAK DETECTION INSPECTION FORM (TYPICAL) |
| II.1.E | POTENTIAL GEOMEMBRANE LINER LEAKAGE |
| II.1.F | PAINT FILTER TEST PROTOCOL, USEPA METHOD 9095B |
| II.1.G | INTERMEDIATE COVER INSPECTION AND MAINTENANCE PLAN |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Purpose

The purpose of this Operations, Inspection & Maintenance Plan (the Plan) is provide guidance to the DNCS Facility staff in the daily operational procedures that have been established in compliance with 19.15.36.8 and 19.15.36.13 NMAC to provide protection of fresh water, public health, safety, and the environment. **Table II.1.1** (OCD Requirements) provides an outline of the specific 19.15.36 NMAC requirements addressed by this Plan.

1.2 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.1.1**). The areas proposed for waste processing (177 acres \pm) and landfilling (318 acres \pm) comprise a total facility footprint of 495 acres \pm . Site access will be provided on the south side of NM 529.

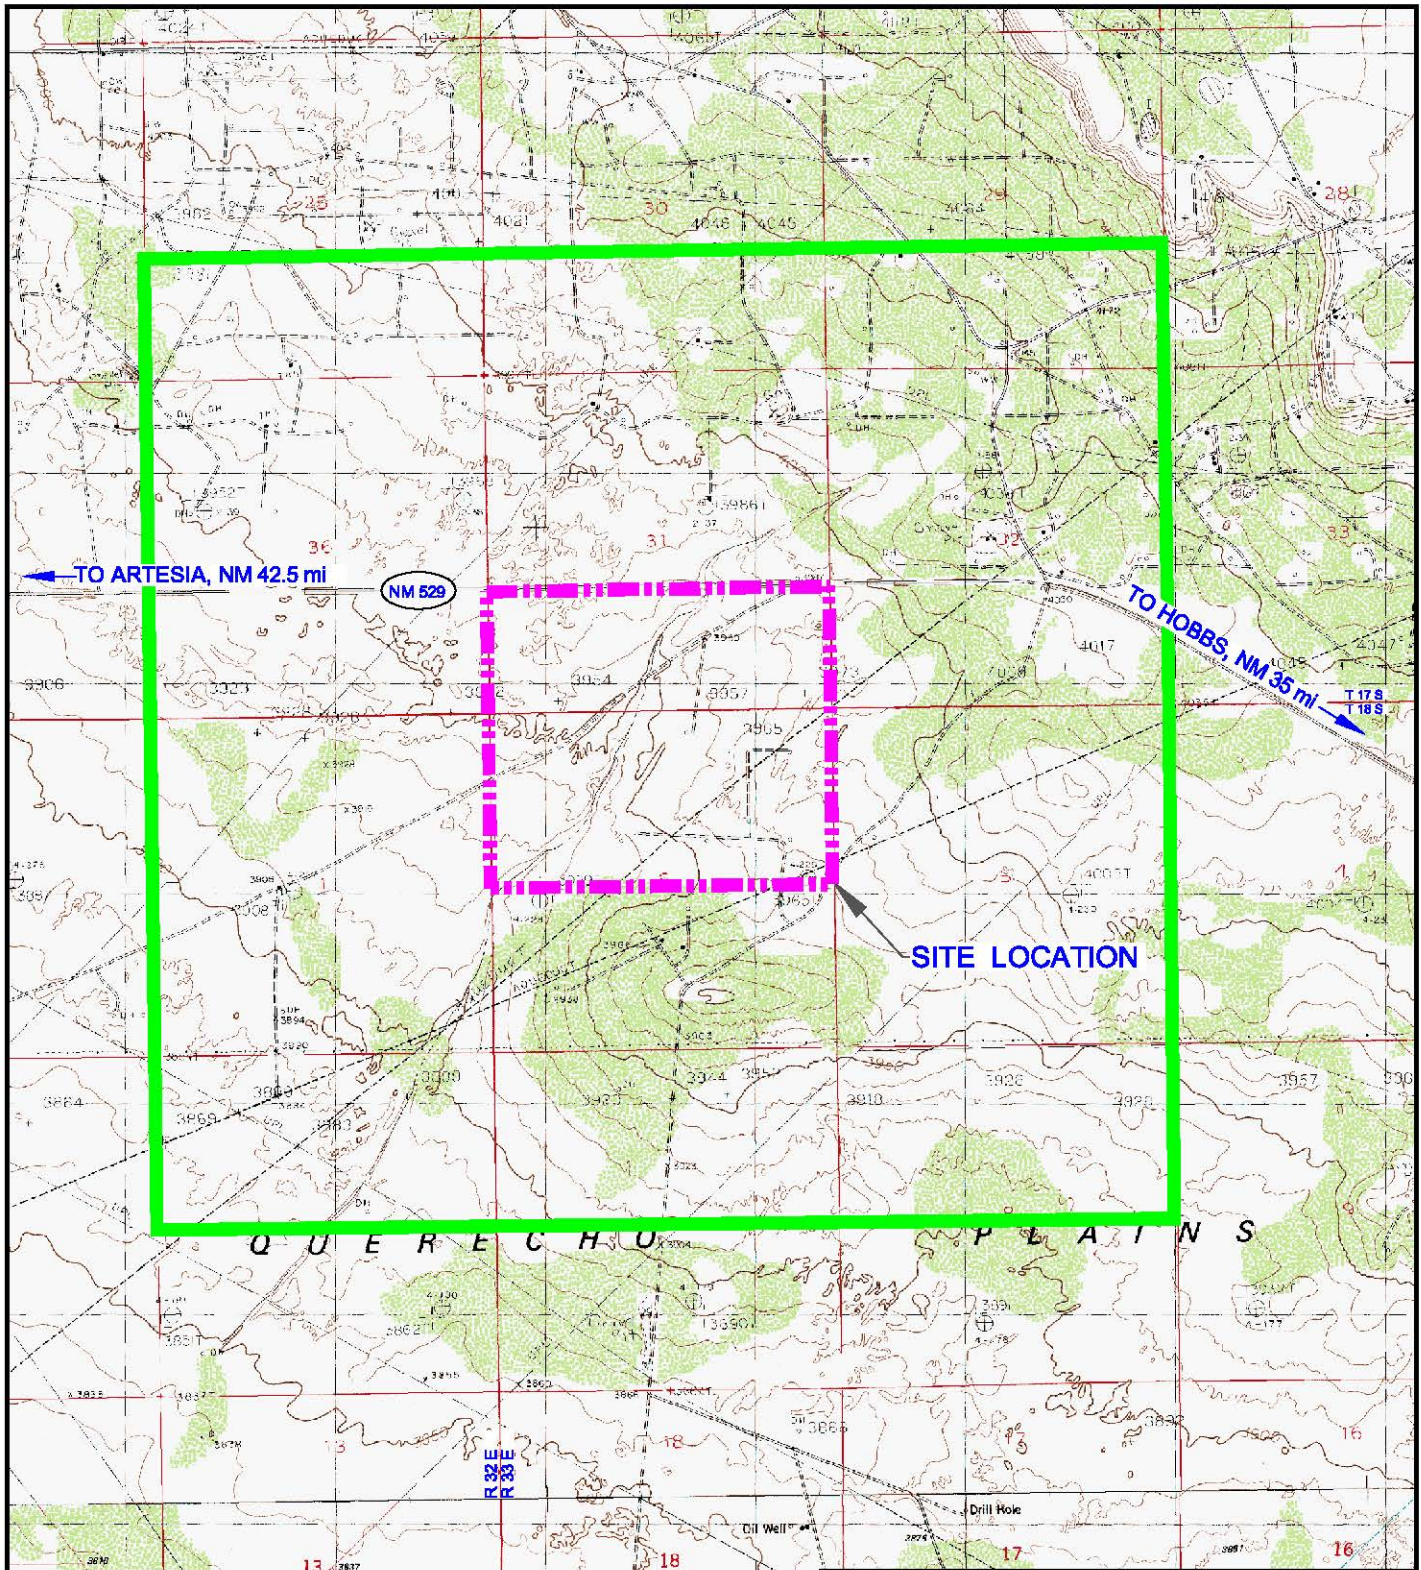


LEGEND

- SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acard 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:57:58 ; LAYOUT: A(P)

Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.1.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

TABLE II.1.1
OCD Requirements: 19.15.36 NMAC
DNCS Environmental Solutions

- 19.15.36.8.C(4)** *a description of the surface waste management facility with a diagram indicating the location of fences and cattle guards, and detailed construction/installation diagrams of pits, liners, dikes, piping, sprayers, tanks, roads, fences, gates, berms, pipelines crossing the surface waste management facility, buildings and chemical storage areas;*
- 19.15.36.8.C(7)** *an inspection and maintenance plan that complies with the requirements contained in Subsection L of 19.15.36.13 NMAC;*
- 19.15.36.8.C(14)** *a best management practice plan to ensure protection of fresh water, public health, safety and the environment;*
- 19.15.36.13.L** *Each operator shall have an inspection and maintenance plan that includes the following:*
- (1) monthly inspection of leak detection sumps including sampling if fluids are present with analyses of fluid samples furnished to the division; and maintenance of records of inspection dates, the inspector and the leak detection system's status;*
 - (3) inspections of the berms and the outside walls of pond levees quarterly and after a major rainfall or windstorm, and maintenance of berms in such a manner as to prevent erosion.*

1.3 Facility Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components; an oil field waste Processing Area (177 acres ±), and an oil field waste Landfill (318 acres ±). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Plan provided as **Figure I.1.2** identifies the locations of the Processing Area and Landfill facilities, which are further detailed on the **Permit Plans (Volume III.1)**. The proposed facilities are detailed in **Table II.1.2**, and are anticipated to be developed in four primary phases as described in **Table II.1.3**.

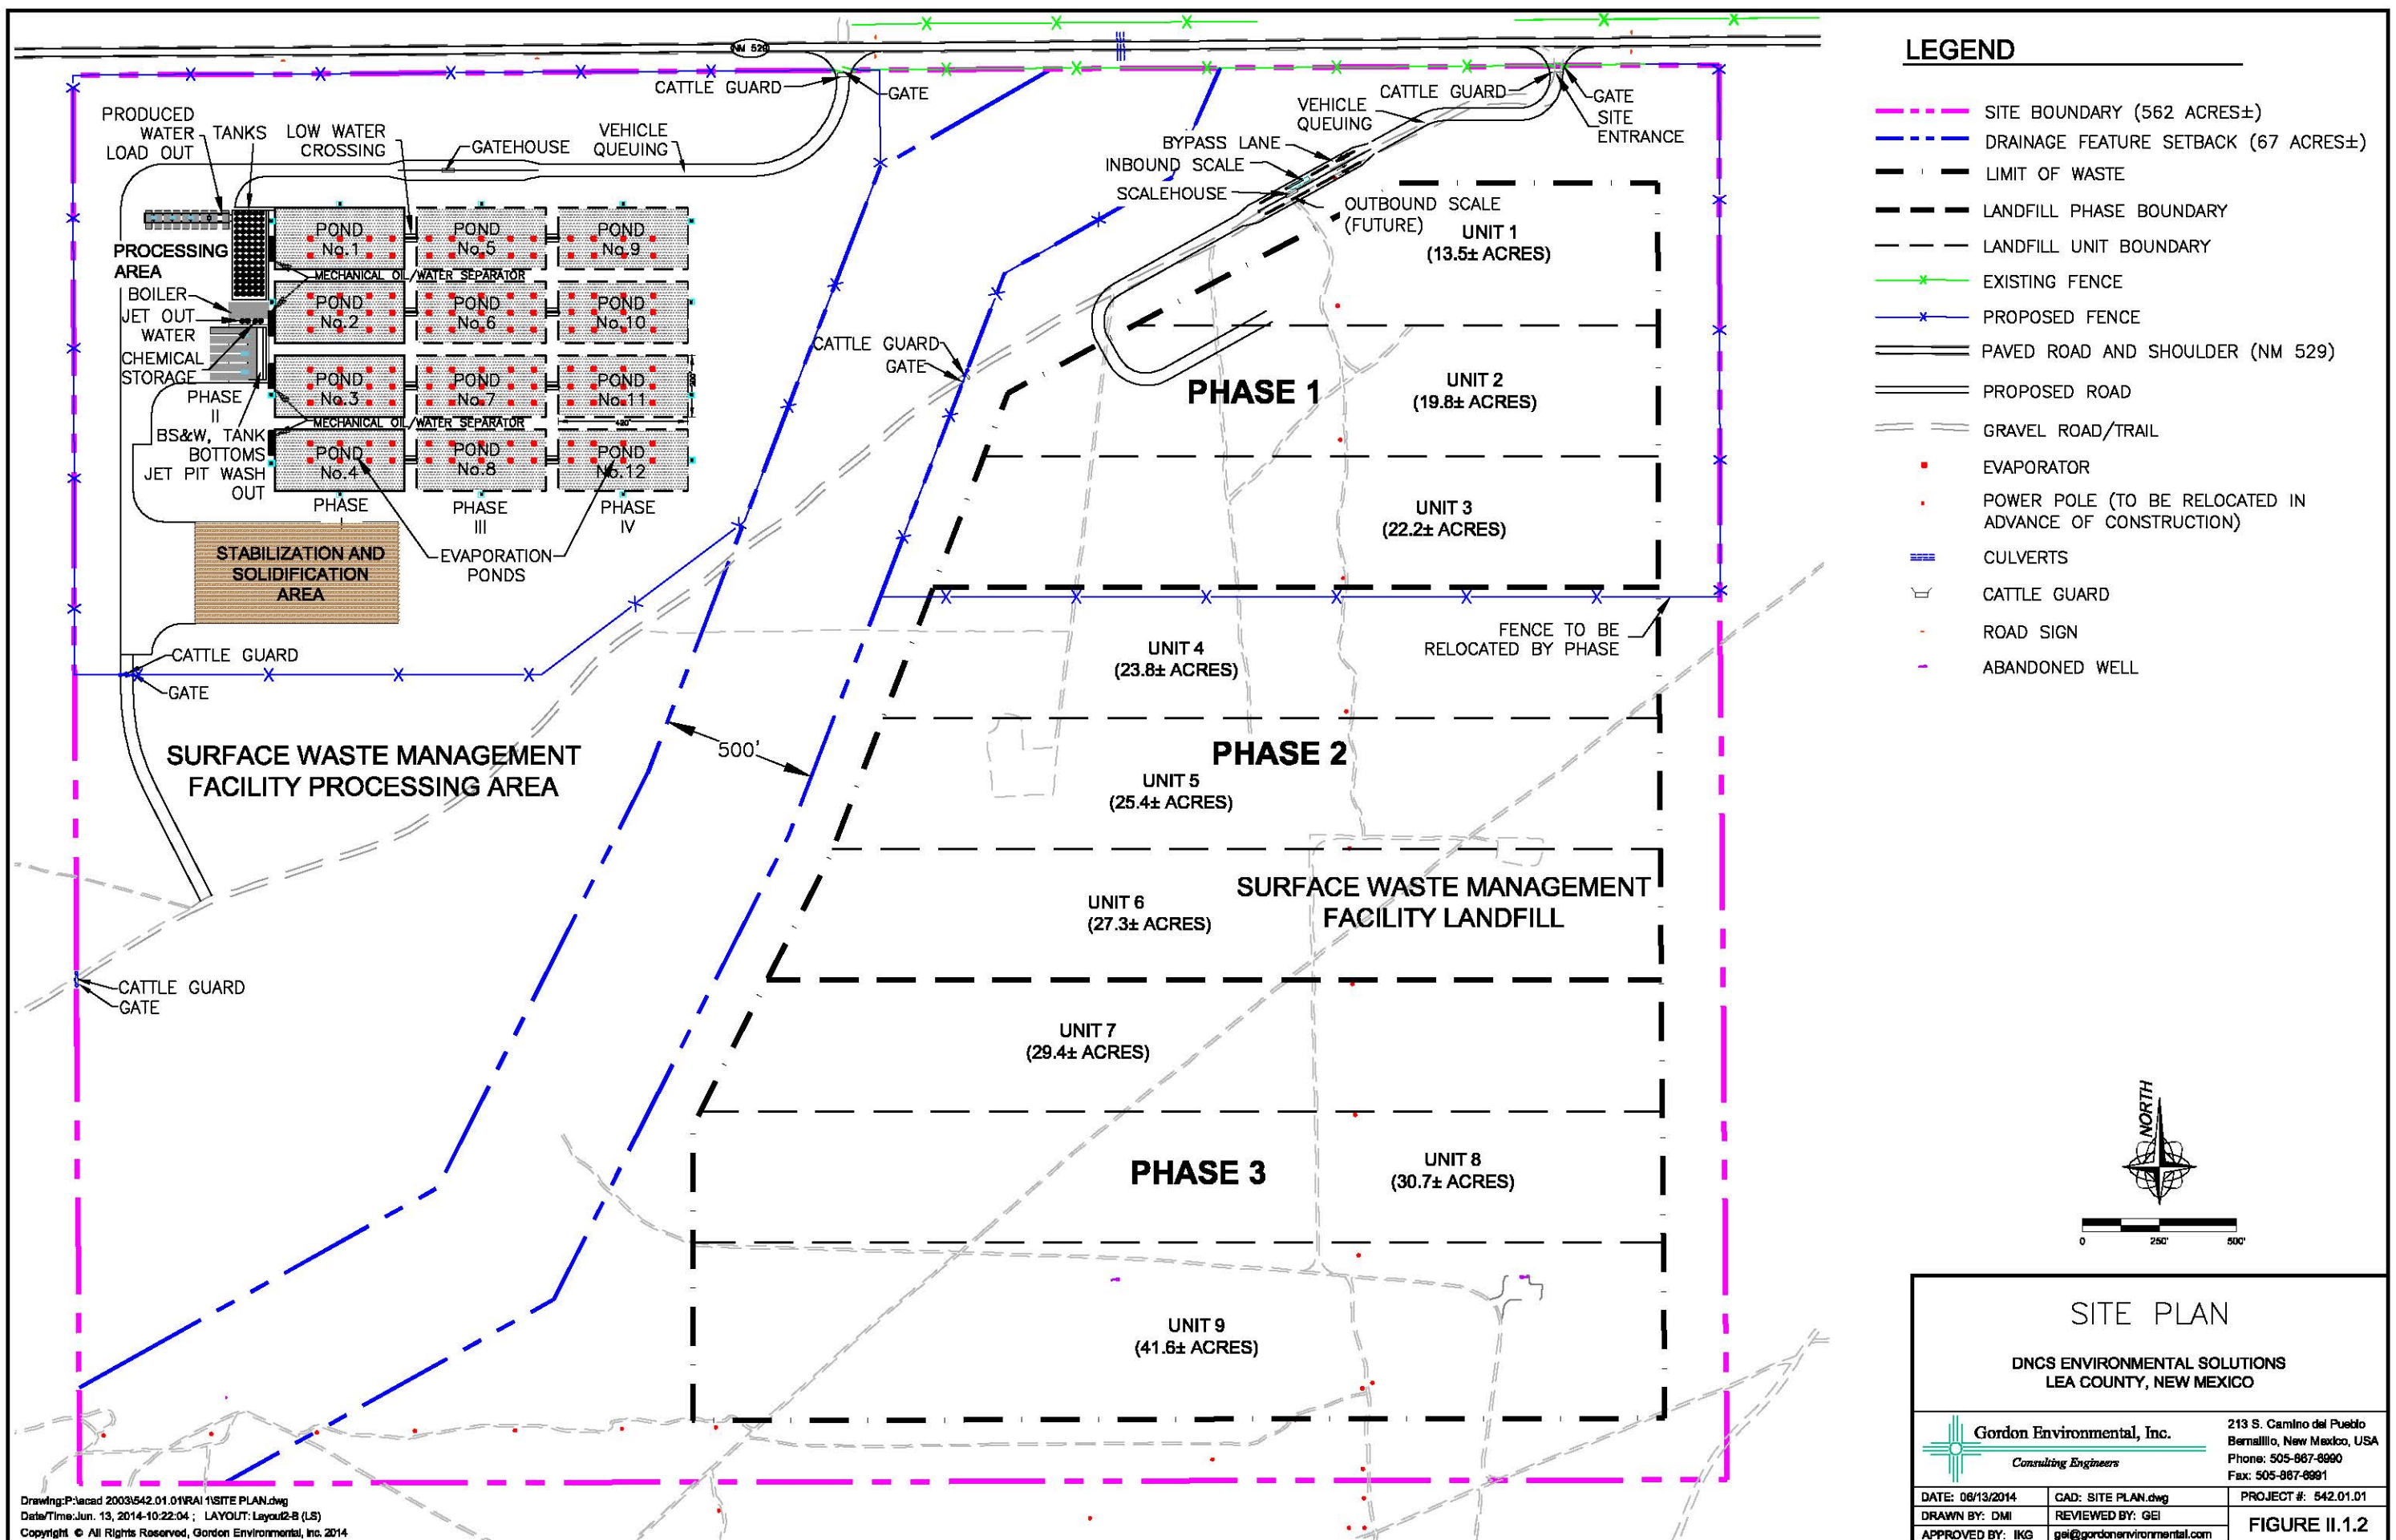


TABLE II.1.2
Proposed Facilities¹
DNCS Environmental Solutions

| Description | No. |
|---------------------------------------|------------|
| Oil field waste disposal landfill | 1 |
| Produced water load-out points | 9 |
| Produced water receiving tanks | 12 |
| Produced water settling tanks | 48 |
| Mechanical oil/water separation unit | 4 |
| Evaporation ponds | 12 |
| Stabilization and Solidification Area | 1 |
| Oil treatment plant | 1 |
| Crude oil recovery tanks | 5 |
| Oil sales tanks | 5 |
| Customer jet wash | 1 (6 bays) |

Note:

¹Subject to change. The proposed facilities are based on projected waste types and volumes; therefore this list may be modified in response to changes in waste streams, market conditions, technology, etc.

TABLE II.1.3
DNCS Development Sequence¹
DNCS Environmental Solutions

| Description | Summary | Year No. ² |
|--|--|-----------------------|
| Phase I - Initial Landfill & Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Initial Landfill Cell (13.5-acres) Produced water load-out points (4) Tank farm berm (complete) Boiler (75 HP) running a heat transfer fluid tank farm Produced Water Receiving Tanks (4), 1,000 bbl capacity³ Settling Tanks (16), 1,000 bbl capacity Crude Oil Recovery Tank (1), 1,000 bbl capacity Oil Sale Tank (1), 1,000 bbl capacity Mechanical Oil/Water Separation Unit Ponds (4) capable of evaporating 3,000 bbl of liquid per day | The oil recovered from the Produced Water Processing Operations process is anticipated to be 6 bbl per day. This material will be pumped to the heated crude oil recovery tank for further processing before being pumped to the oil sale tank. | 1 |
| Phase II - Jet-Out Pit Operation. | | |
| <ul style="list-style-type: none"> Jet-Out Pit (six-station) for handling basic sediment and water (BS&W), tank bottoms, oily drilling muds and tank wash-outs Additional crude oil recovery tank (1), 1,000 bbl capacity Install 5-acre Stabilization and Solidification area | The oil recovered from the top of the Jet-Out Pit will be pumped to a heated Crude Oil Recovery Tank installed in the Tank Farm. Oil recovery from the Produced Water Tanks will also be plumed to this tank. Water recovered from the Pit will be pumped to the Produced Water Receiving Tanks. Sediments from the Pit will be bucket-loaded out of the pit and transferred to the Stabilization and Solidification Area for processing prior to landfilling. | 2 |
| Phase III - Expanded Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Produced water load-out points (4) Additional Produced Water Receiving Tanks (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Crude Oil Recovery Tanks (3), 1,000 bbl capacity Additional Oil Sales Tanks (2), 1,000 bbl capacity Additional (2) Mechanical Oil/Water Separation Units Additional ponds (4) capable of evaporating an additional 5,000 bbl per day of liquid | The additional oil recovered from the expanded Produced Water Processing Operation process, anticipated to be 6 bbl per day, will be pumped to the Crude Oil Recovery tanks for further processing. | 3 |
| Phase VI - Ultimate Produced Water Processing Facility. | | |
| <ul style="list-style-type: none"> Additional Produced Water Receiving Tank (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Oil Sales Tanks (1), 1,000 bbl capacity Additional Mechanical Oil/Water Separation Unit Additional ponds (4) capable of evaporating an additional 4,000 bbl per day of liquid | The additional oil recovered from the ultimate Produced Water Processing Facility will be pumped to the Crude Oil Recovery Tank for further processing. | 4 |

Notes:

¹ The DNCS site development sequence is subject to change. Different combination of these improvements may be constructed at any time.

² Estimated number of years after OCD Surface Waste Management Facility Permit issued

³ bbl = barrels of oil

2.0 GENERAL FACILITY INFORMATION

2.1 Land Use and Zoning


The DNCS Facility is located within a 562 acre \pm tract in unincorporated eastern Lea County, approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles south of Maljamar, NM (**Figure II.1.1**). The Facility is surrounded by undeveloped space on all sides with NM 529 situated along the northern boundary and mineral exploration (oil and gas) the only local development. The closest permanent residence is located in Maljamar, NM, approximately 6.3 miles to the northwest. Lea County does not have zoning specifications on land use in unincorporated areas.


2.2 Access Control

Access control for DNCS will be provided by perimeter fencing for both the Processing Area and the Landfill; cattle guards; locking gates; and employee presence when open for waste receipts. No oil field waste will be accepted unless an attendant is on duty. The Facility will be gated and locked when the site is not attended. The Site Location Map is plotted on the most recent United States Geological Survey (USGS) map (**Figure II.1.1**) and shows the Facility location in relation to state roads and adjacent features. The Site Plan, provided as **Figure II.1.2**, provides a plan view of the Facility showing the proposed layout, fencing, gates, and cattle guards.

2.3 Site Signs

A sign will be posted at the Facility entrance which identifies the location of the site, hours of operation, emergency telephone numbers, and delivery instructions (**Figure II.1.3A**). Additional site rules that are applicable to both Facility personnel and customers will be posted at the receiving areas and along the access roads to advise drivers concerning speed limits, prohibited activities, acceptable waste types, delivery instructions, and other health and safety precautions. Example signs are provided in **Figure II.1.3B**. Identification and cautionary signs for pits, ponds, and tanks in the Processing Area will also be installed at the Facility as needed.

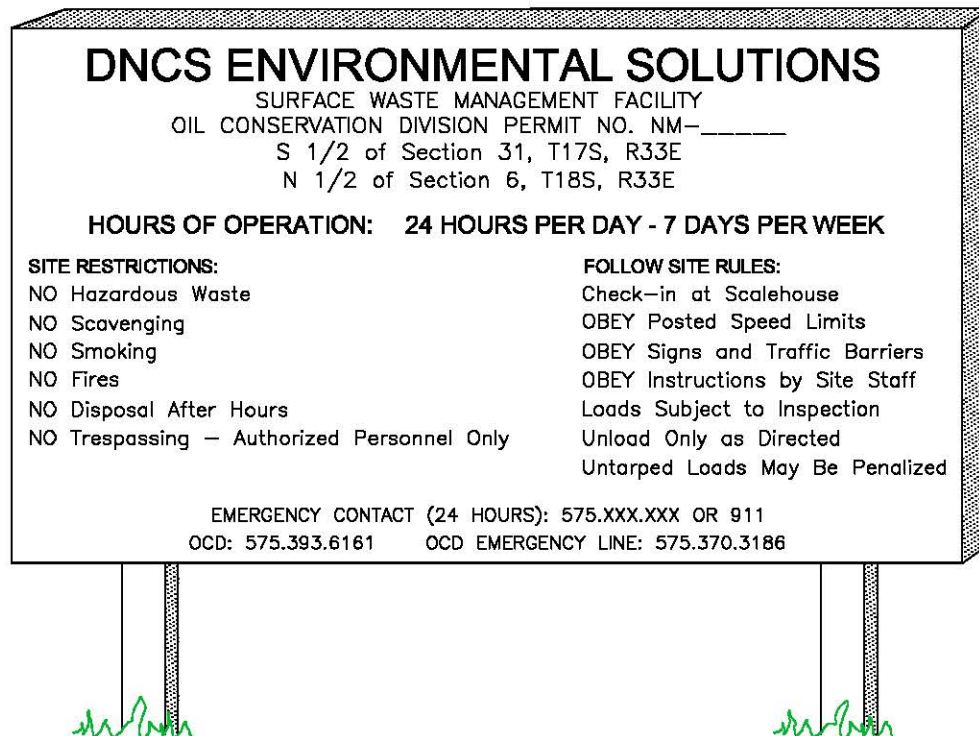

| | | |
|---|-----------------------------|---|
| SITE ENTRANCE SIGN (TYPICAL) DNCS ENVIRONMENTAL SOLUTIONS LEA COUNTY, NEW MEXICO | | |
|  Gordon Environmental, Inc. <i>Consulting Engineers</i> | | 213 S. Camino del Pueblo Bernalillo, New Mexico, USA Phone: 505-887-8990 Fax: 505-887-8991 |
| DATE: 06/03/2014 | CAD: ENTRANCE SIGN.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.1.3A |
| APPROVED BY: IKG | gal@gordonenvironmental.com | |

**DNCS ENVIRONMENTAL
SOLUTIONS**

LEA COUNTY, NEW MEXICO

**S $\frac{1}{2}$ SECTION 31, T17S, R 33E
N $\frac{1}{2}$ SECTION 6, T18S, R 33E**

OIL CONSERVATION DIVISION PERMIT NO. NM-_____

DANGER



NO DRUGS



NO FIREARMS



NO SMOKING



NO CHILDREN

DANGER

**THIS MACHINE
STARTS
AUTOMATICALLY**

DANGER

**H₂S
MAY BE PRESENT**

SITE SIGNS (TYPICAL)

**DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO**



Gordon Environmental, Inc.

Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8880
Fax: 505-887-8881

DATE: 10/23/2013

CAD: SITE SIGNS.dwg

PROJECT #: 542.01.01

DRAWN BY: DMI

REVIEWED BY: DRT

FIGURE II.1.3B

APPROVED BY: IKG

gek@gordonenvironmental.com

2.4 Traffic

Traffic will arrive at the DNCS Facility by traveling east or west on NM 529, turning south at the site access points into the Processing Area or Landfill. Traffic for the Facility is not anticipated to have an impact on current public transportation patterns. Vehicles accessing the Facility, including staff, are anticipated initially to average 100 vehicles per day (vpd). Daily traffic flow into the Facility may increase to over 500 vpd as oil field production activities continue to increase and more companies utilize the Facility. Traffic flow for the DNCS Facility is depicted on **Figures II.1.4A** (Processing Area) and **II.1.4B** (Landfill).


3.0 FACILITY PERSONNEL


3.1 Requirements and Duties

Daily operations at the Facility will be supervised by the DNCS management team located onsite in the Processing Area Gatehouse and the Landfill Scalehouse (**Figure II.1.2**). Management and administrative support will be provided by DNCS personnel routinely on-site. Disposal operations will only be conducted when an attendant is on duty. Acceptance criteria for the oil field waste are described in the Oil Field Waste Management Plan (**Volume II.2**). The initial general staffing list for the Facility is provided in **Table II.1.4**, subject to adjustment in response to changes in incoming waste volumes, market demands, technology updates, etc.

TABLE II.1.4
Facility Staffing List
DNCS Environmental Solutions

| Description | Number |
|--------------------|---------------|
| General Manager | 1 |
| Plant Supervisor | 1-2 |
| Equipment Operator | 4-6 |
| Laborer | 2-4 |

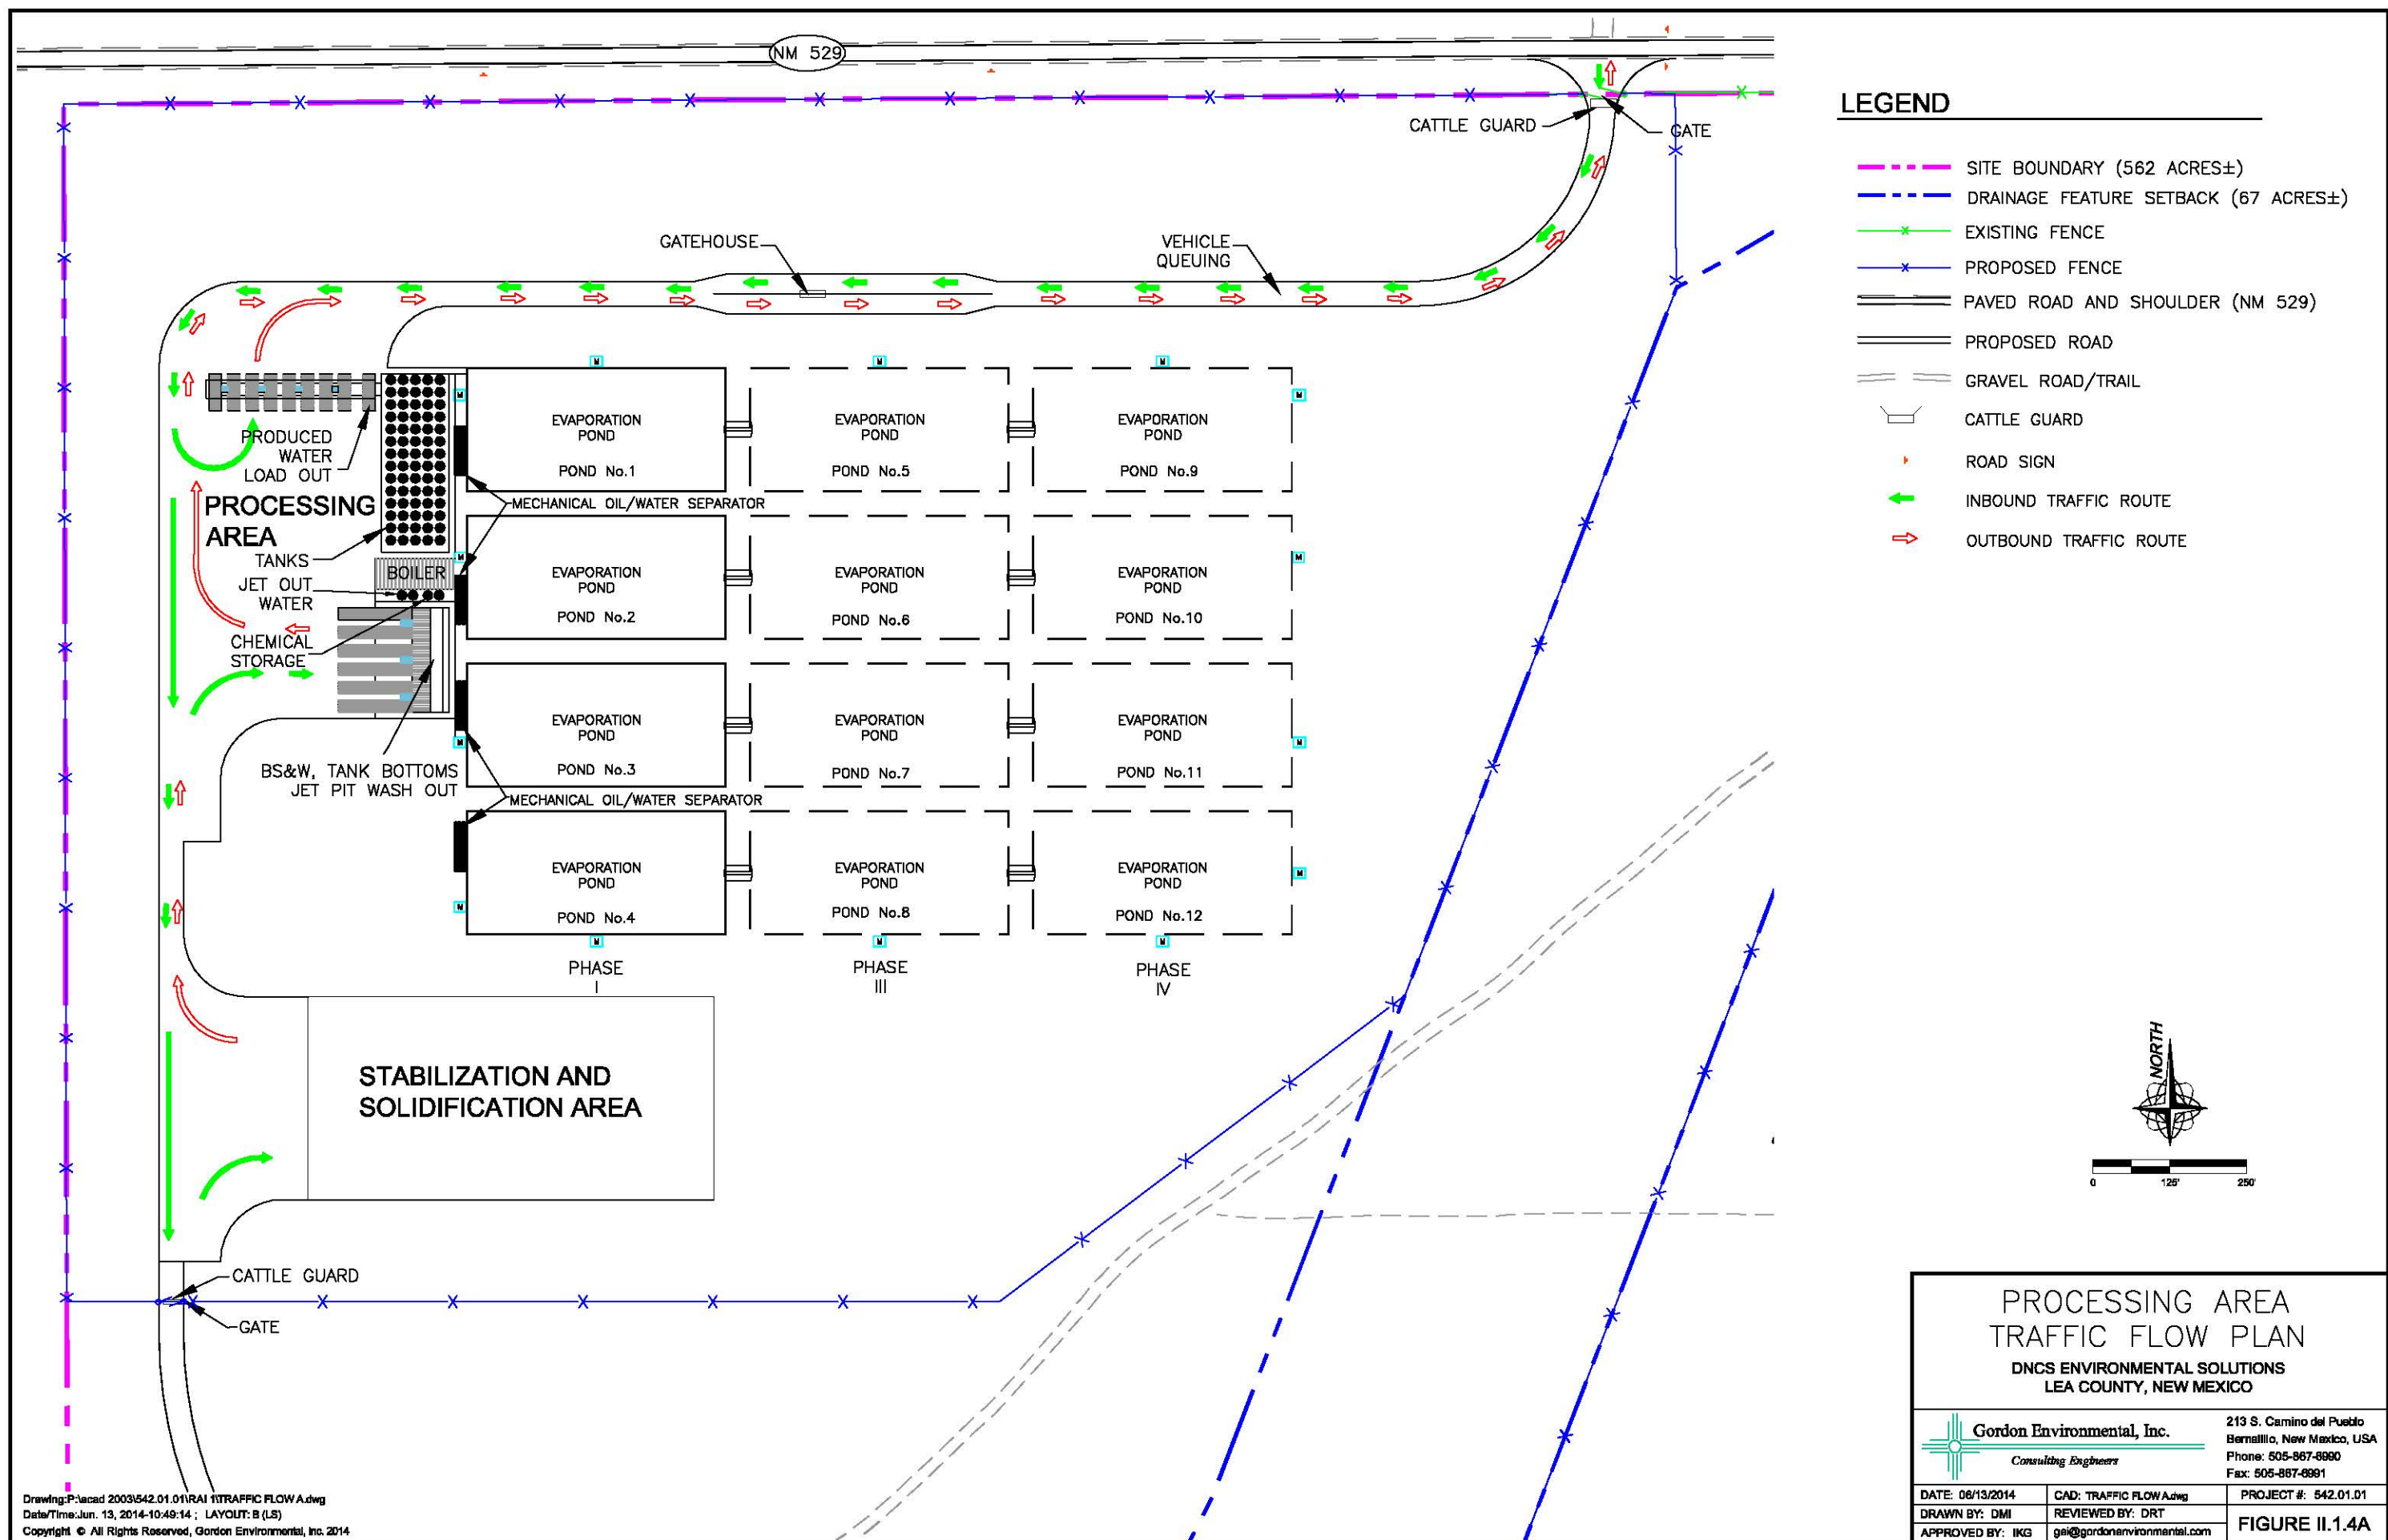

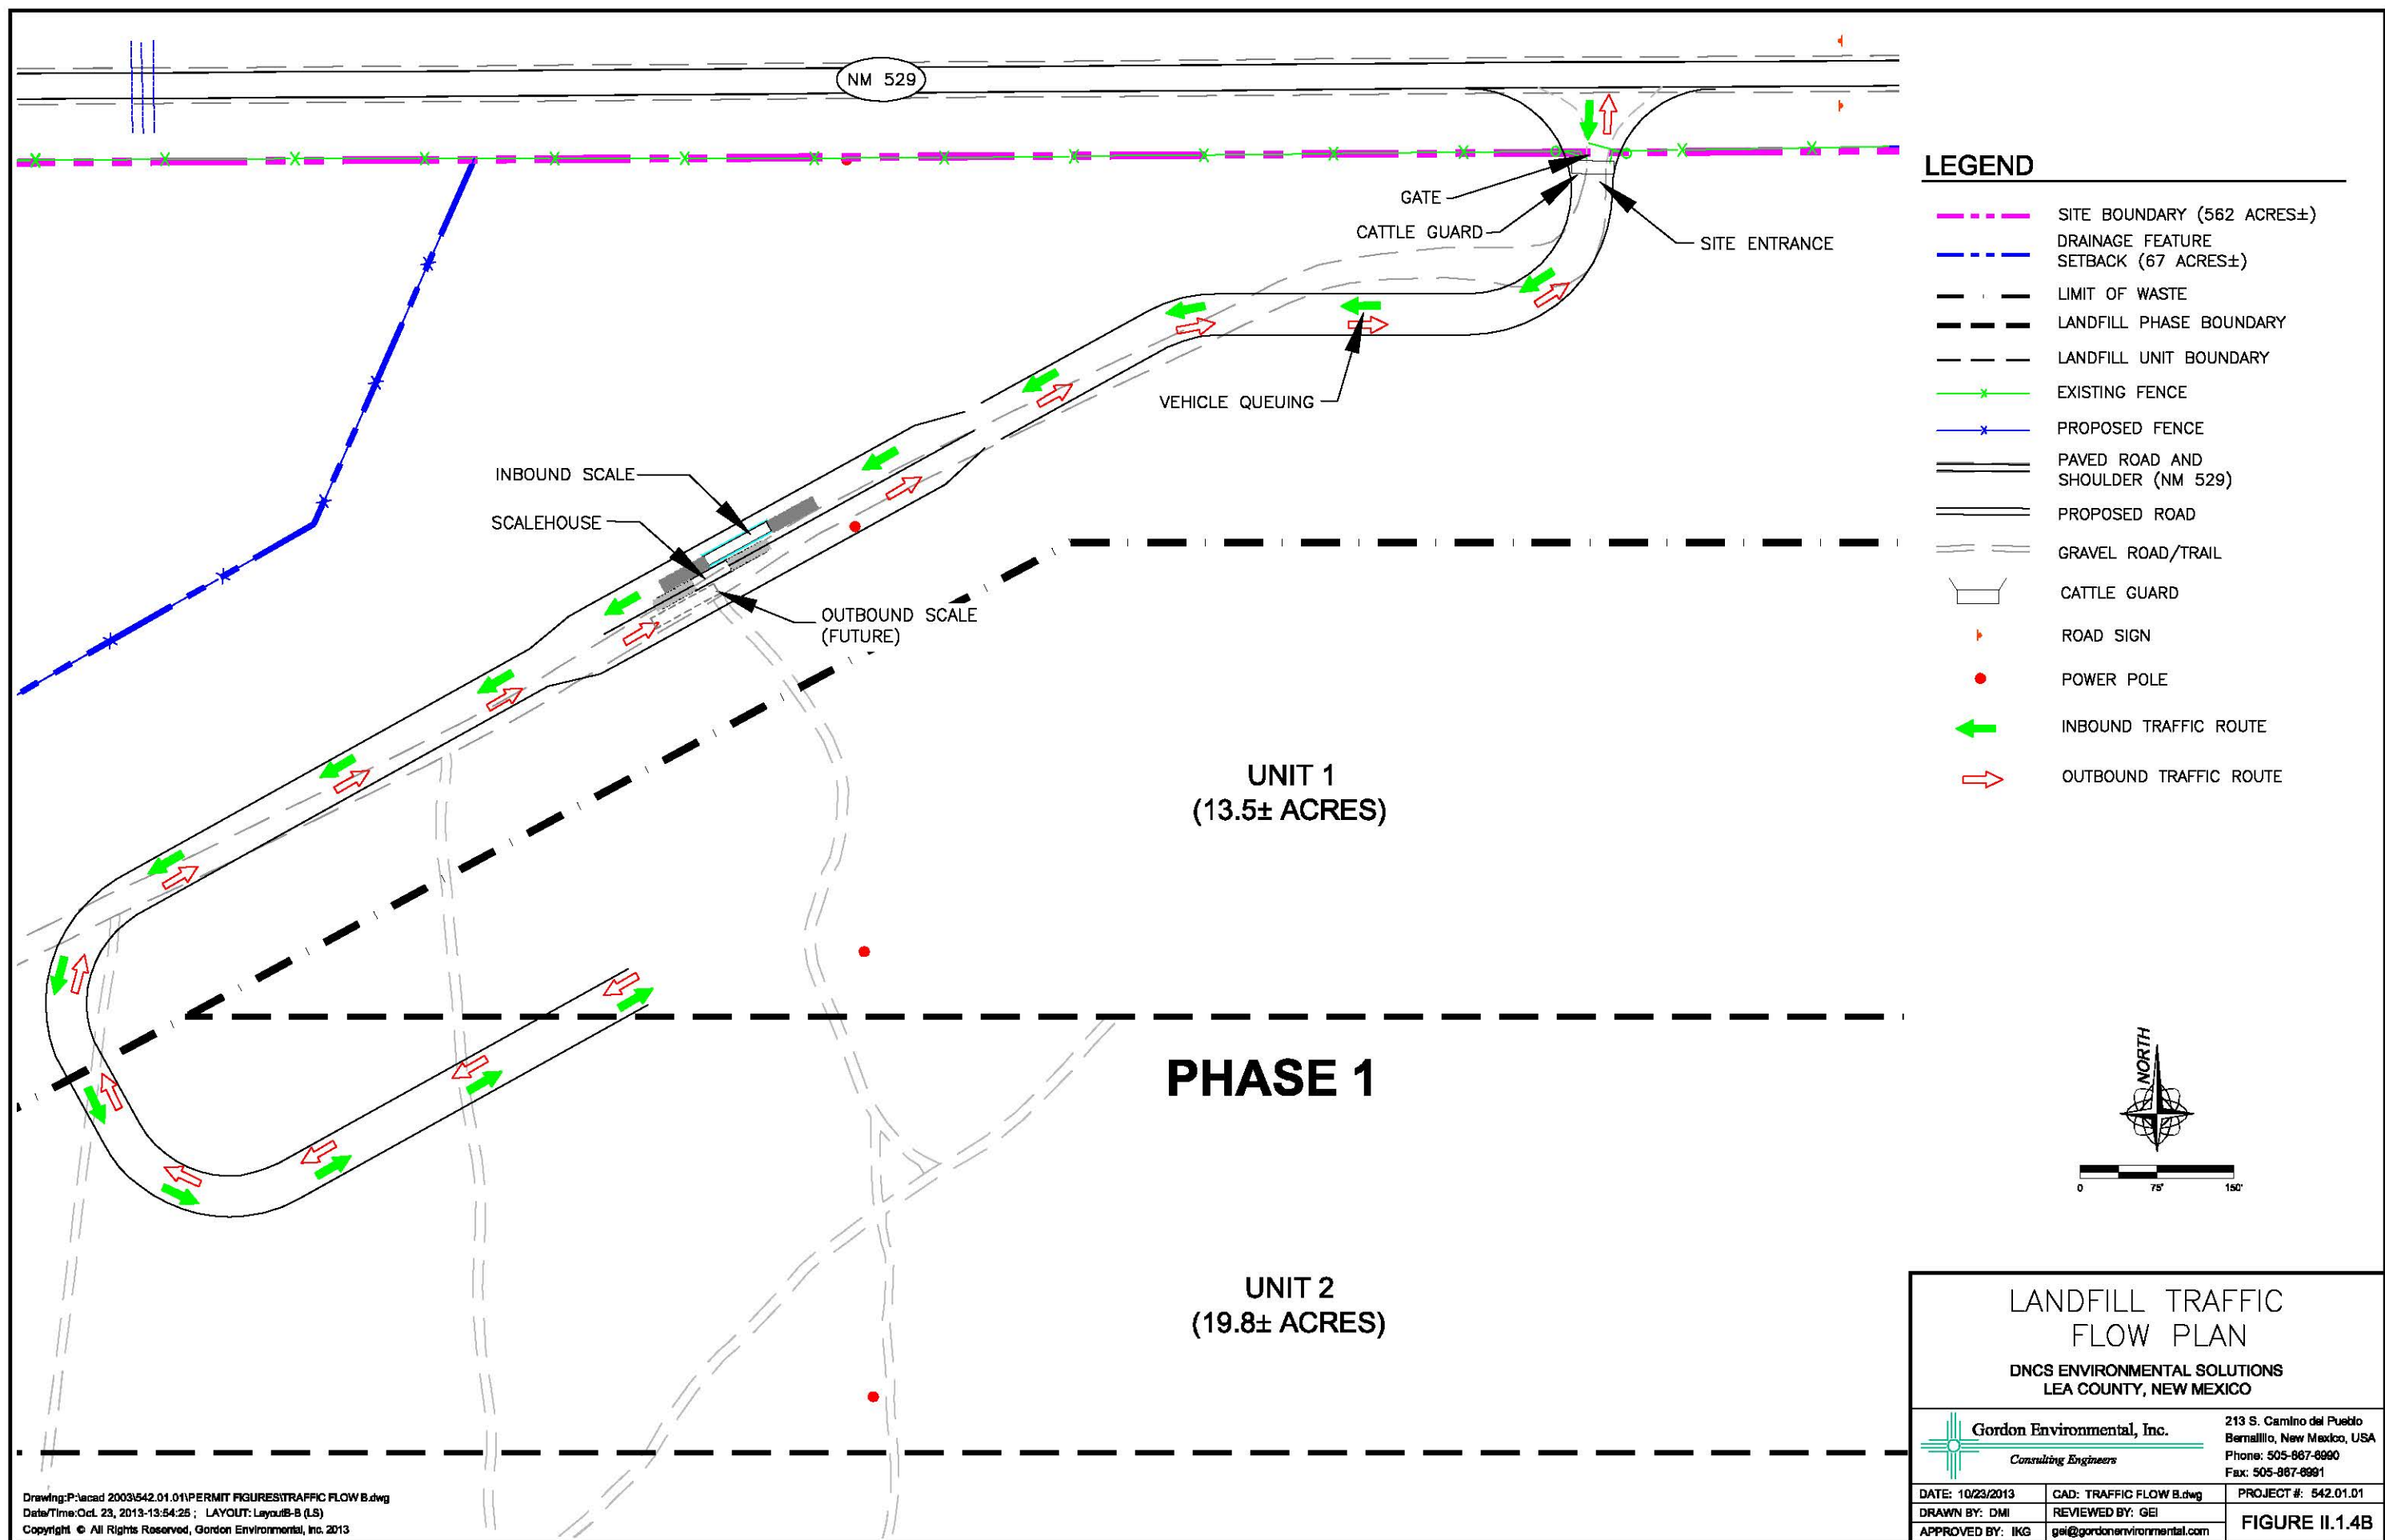

3.2 Training Requirements

Training for personnel will include health and safety protection, waste screening, fire prevention, emergency response, etc. Emergency Coordinators for the proposed Facility are identified in the Contingency Plan (**Volume II.5**). A trained operator or designated representative with full knowledge of the 19.15.36 NMAC Rules and the DNCS Permit requirements will be present at all times while the Facility is in operation. Facility staff will be required to read this Plan, the Oil Field Waste Management Plan (**Volume II.2**), the Hydrogen Sulfide (H₂S) Prevention and Contingency Plan (**Volume II.3**), and the Contingency Plan (**Volume II.5**). Signature sheets acknowledging that this requirement has been met will be retained in the Facility Operating Record in accordance with the Safety Communications Program (**Attachment II.1.A**).

4.0 FACILITY OPERATIONAL PROCEDURES

The operational procedures for the DNCS Facility are designed to maximize the efficiency of waste receiving, processing, and disposal; and to protect the health and safety of Facility staff and delivery personnel. Detailed operational procedures are enumerated in each of the applicable sections of this Plan for oil field waste stream processing, landfill disposal, contingency planning, recordkeeping, personnel training, etc. Oil field waste disposal operations will be conducted in a safe and environmentally sound manner in accordance with 19.15.36 NMAC.

4.1 Noise Control

There are no permanent residences within 6 miles of the Facility, and most heavy equipment operations (i.e., the Landfill) will be conducted below grade and behind berms, which will aid in noise control. Surrounding lands are unoccupied, or consist of cattle grazing and development related to oil and gas exploration.

4.2 Odor Control

Prior to oil field waste acceptance, vehicles will be randomly screened for the presence of hydrogen sulfide (H₂S). If H₂S is detected above 10 parts per million (ppm), the load will be treated with calcium hypochlorite [Ca(ClO)₂] to lower the H₂S to acceptable levels prior to unloading operations. In addition, at least 1,000 gallons of chemicals such as bleach will be maintained on-site to control H₂S and its associated odors originating from the evaporation ponds or other operating units. Downwind land uses (i.e., primarily to the north and northwest) are vacant.

4.3 Dust Control

The access roads and active areas within the Facility will be treated with water, approved recycled waters or dust palliatives, as needed, from a water truck to reduce dust. The posted speed limit will be 15 miles per hour (mph) inside the property which will assist in limiting the amount of dust generated by onsite traffic. Routine operations listed on **Table II.1.5** are the most likely sources of dust, along with recommended primary and secondary control measures:

TABLE II.1.5
Dust Control
DNCS Environmental Solutions

A water truck will be available to apply water, approved recycled waters, or dust palliatives to the access roads and active areas within the DNCS Facility as needed to reduce dust. In addition, the posted speed limit will be 15 mph inside the property. Listed below are routine operations that are the most likely sources of dust, along with recommended primary and secondary control measures:

- **Disposal Operations -**
 - Primary Control Measure: Paving of high-traffic areas, apply water to unpaved roads as necessary, enforce speed limit posted on-site.
 - Secondary Control Measure: Apply dust palliatives to unpaved portions of the Facility, provide additional pavement.
- **Excavations -**
 - Primary Control Measure: Water areas prior to and during excavation. Water areas of excavation and haul roads during and at the end of each day to form a dust-binding soil crust.
 - Secondary Control Measure: Phase work to reduce the amount of disturbed surfaces, apply additional water, work at lower elevations and higher areas when wind velocity is low.

- **Stockpiles -**
 - Primary Control Measure: Pre-water areas prior to excavation. Apply water to short-term stockpiles and when transporting soils, stockpile below-grade or behind berms.
 - Secondary Control Measure: Control vehicle access to the area. Apply dust surfactant to long-term stockpiles or apply seed/mulch to prevent erosion.
- **Track out extending onto public roadways –**
 - Primary Control Measure: Pave permanent on-site entrance roadways, sweep as necessary.
 - Secondary Control Measure: Apply recycled asphalt, caliche/gravel pads or similar materials at the transition from unpaved to paved roadways.
- **Unpaved roadways and parking areas –**
 - Primary Control Measure: Limit vehicle speed via posting speed limits; apply water, use aggregate or caliche.
 - Secondary Control Measure: Apply water and surfactants to unpaved roads and parking lots, as needed, provide additional pavement.

4.4 Minor Spills/Releases

The spill or release of a potentially hazardous material at the Facility is most likely to involve fuel or various vehicle fluids (i.e., engine oil, hydraulic oil, antifreeze, etc.). Other materials most likely to present a concern as a result of normal operations include petroleum products and petroleum wastes delivered to the Facility. Spills involving these types of materials could occur during fueling, routine maintenance operations or during unloading for processing/disposal of waste. These minor spills will be cleaned up immediately upon discovery.

The Facility will maintain spill clean-up kits on-site that include absorbent materials, shovels, and small containment buckets. Waste materials resulting from minor spills and clean-up will be managed and disposed of in accordance with the Oil Field Waste Management Plan (**Volume II.2**). Although highly unlikely, large spill/releases from onsite ponds and tanks may occur. The response procedures for this type of release are detailed in the Contingency Plan (**Volume II.5**).

5.0 LANDFILL OPERATIONS

The proposed DNCS Landfill operation will provide for the permanent disposal of exempt waste generated in the development and production of oil and gas resources. The Landfill operation will be guided by the Landfill design presented in **Volume III** (Engineering Design and Calculations); and detailed in the **Permit Plans (Volume III.1)**.

5.1 Landfill Equipment

Table II.1.6 identifies the equipment proposed for the landfill operations. This inventory has proven effective at similar facilities in managing ongoing construction and operations. Pieces of equipment may be added or subtracted from the list corresponding to the rate of waste flow, projected earthmoving activities, changes in technology, etc. Some operating and construction functions, such as mass excavation and geosynthetic liner installation, will be subcontracted to qualified firms. The equipment inventory demonstrates both the redundancy and back-up capabilities of the on-site Landfill equipment. Following is a summary of functions and capabilities of the major units:

- The compactors are high-ground-pressure pieces of equipment specially designed for waste receiving; compaction, daily cover application, and related fill face activities.
- The scrapers are used primarily for earthmoving activities, such as excavation of new cells and hauling of cover material from designated stockpiles. Scrapers will often deliver soil directly from the excavation of a new cell to an area near the active fill face. The scrapers can apply daily, intermediate, and final cover at a high rate of delivery.
- Dozers are tracked pieces of equipment that are used to move soil and waste, usually for short distances. The dozers assist the scrapers in preparation of new cells, and can apply cover at the fill face. Dozers are versatile pieces of equipment that are also valuable in cover maintenance, road grading, and waste compaction as back-ups to the compactors, graders, and front-end loaders.
- Front-end loaders are used for earthmoving activities and cell construction tasks. They can be used for excavation of soil or movement of waste, and for delivery and application of cover material. Front-end loaders can provide back-up to scrapers and dozers, and can be used for road and drainage maintenance, if necessary.
- The water wagon will be used on a daily basis to control dust that could originate from on-site roads, active excavations, covered areas, etc. The water sources for the wagon will be on-site tanks and ponds.
- The motor grader is effective is temporary roadway construction, maintenance, and drainage improvements.

TABLE II.1.6
Landfill Equipment (Typical)
DNCS Environmental Solutions

| Type | Number | Primary Purpose |
|------------------------|---------------|-------------------------------------|
| CAT 970 Loader | 1 | Earthmoving |
| CAT 950 Loader | 1 | Earthmoving |
| CMI 390 Compacter | 2 | Waste compaction |
| CAT 627 Scrapers | 2 | Daily cover operations/earthmoving |
| CAT 621 Water Wagon | 1 | Dust control |
| CAT D8 Dozer | 1 | Waste and soil spreading/compaction |
| CAT D6 Dozer | 1 | Waste and soil spreading/compaction |
| CAT MG140 Motor Grader | 1 | Road and drainageway maintenance |

Notes:

1. Equivalent models may be substituted.
2. The number of each equipment type is matched to the projected waste types and volumes; the list may be modified in response to changes in waste streams, technology, etc.
3. Equipment is subject to routine replacement.
4. There will be arrangements made with local equipment vendors for maintenance and back-up leasing.

5.2 Waste Characteristics

DNCS Landfill will accept exempt oil field wastes generated from oil and gas exploration and production operations. No hazardous waste will be accepted at DNCS. The Facility will require documentation for accepting oil field wastes, including OCD Form C-138 (*Request for Approval to Accept Solid Waste*), and will screen incoming waste in accordance with the Oil Field Waste Management Plan (**Volume II.2**). **Table II.1.7** lists proposed waste receipts sorted by type with a corresponding estimate of volume and proportion. The initial average daily solid waste disposal (oil field waste) acceptance rate is anticipated to be 500 cubic yards (yd³) per day, equal to approximately 500 tons per day (2,000 pounds per yd³).

TABLE II.1.7
Landfill Waste Characterization and Anticipated Daily Waste Receipts¹
DNCS Environmental Solutions

| Origin | Approximate Proportion | Daily Average (yd³)^{1,2} |
|-------------------------|-------------------------------|---|
| Contaminated Soil | 60% | 300 |
| Drilling Mud | 30% | 150 |
| Stabilized Tank Bottoms | 5% | 25 |
| Other Wastes | 5% | 25 |
| Totals | 100% | 500 |

Notes:

¹Values based on anticipated initial volumes of waste that will be delivered from area oil field production activities.

²yd³ = cubic yards

³1 yd³ oil field waste = 2,000 pounds (lbs)

5.3 Sequence of Landfill Development

The DNCS Landfill site development plan is presented on the Site Plan (**Figure II.1.2**) and on **Permit Plans, Sheet 3 (Volume III.1)**; and is further described in **Table II.1.8**. The Landfill will consist of three Units (I-III), each of which will contain several waste cells. Landfill development will commence with the “North Phase” as shown on **Permit Plans, Sheets 6 and 7 (Volume III.1)**. Unit I will be developed first with the construction of Cell 1 in the northeast corner of Unit I. Cell development will progress southward through Unit I before continuing in Units II and III. The proposed disposal process is the “area fill” method for all cells. Each cell will be equipped with a composite liner/leachate collection system and stormwater controls demonstrated to meet applicable engineering standards and OCD requirements.

Cells may be developed in segments and combinations, and more than one cell may be in operation at any one time in response to incoming waste volumes, the progress of site development, and providing available disposal volume below-grade. The objective is to provide a sufficient area for disposal while keeping the total disturbed area to a minimum. When cells reach interim or final grade, additional cover will be applied as needed to achieve the required cover thickness, and the area will be graded and vegetated within 12 months once the final grade is achieved. Soils may be temporarily stored and covered above interim or final grade.

TABLE II.1.8
Landfill Development Sequence
DNCS Environmental Solutions

1. Planning

- a. Confirm that the cell area has been cleared for excavation (e.g., utilities).
- b. Review Permit Plans, Construction Plans, and any pertinent Permit Documents and Permit Conditions.
- c. Establish survey line/grade controls, construction benchmarks, etc.
- d. Develop cell-specific sequence of development, contractor coordination, equipment, and staffing requirements.

2. Earthwork

- a. Clear and dispose of vegetation.
- b. Stockpile select surface soils for later use as topsoil.
- c. Excavate cell to design grades.
- d. Install stormwater management systems (e.g., drainage basins and drainageways).
- e. Extend on-site access roads to provide cell ingress and egress.

3. Environmental Control Systems

- a. Compact and test subgrade, prepare for liner installation (CQA Plan, **Volume II.7**).
- b. Notify OCD via a milestone schedule and at least 72 hours prior to liner installation.
- c. Install FML composite liner system on cell floor.
- d. Construct leachate collection systems for cells, including risers and sumps as shown on the **Permit Plans (Volume III.1)**.
- e. Install protective soil layer from designated stockpile (and stormwater segregation systems if applicable).
- f. Submit Engineering Certification of completed construction to OCD.


4. Operations

- a. Use excavated soil from next cell for daily, intermediate, and final cover for current or previously filled cells.
- b. Use stockpiles as necessary to supplement cover supplies.
- c. Install subsequent cells consistent with 1, 2, and 3 above.
- d. Extend roadways, drainage systems, etc., in advance of need.

5.4 Daily Landfill Operating Procedures

Vehicles delivering waste will approach the DNCS Facility entrance from the east or west on NM 529, which is located adjacent to the northern boundary of the site. NM 529 is a paved, two-lane highway with no special weight restrictions, and paved, full-width shoulders. The site entrance sign will identify prohibited materials and rules of conduct on-site (**Figure II.1.3**). Disposal operations will only be conducted when an attendant is on duty. At the Landfill Scalehouse, waste loads will be screened to confirm that the solid waste materials are acceptable for disposal at DNCS. Waste identification, tracking, and screening are addressed in the Oil Field Waste Management Plan provided in **Volume II.2**. Vehicles with acceptable loads will be directed to proceed on the interior roads in accordance with signs and direction by facility personnel to the working face for unloading. A description of the solid waste disposal process is included on the Process Flow Diagram (**Figures II.1.5A and II.1.5B**).

Unacceptable waste loads will be managed in accordance with the Contingency Plan (**Volume II.5**). If a load is rejected it will be returned to the generator. The width of the daily cell and working face will be maintained to the minimum dimensions necessary to accommodate traffic. At the initial anticipated rate of waste receipts (500 gate yd³/day), the unloading area will generally be maintained at a width of 50-100 ft to accommodate peak hourly traffic flow. Soil cover (or an appropriate alternate cover) will be applied to the Landfill's active face on an as-needed basis to control dust, debris, odors, vectors or other potential nuisances.

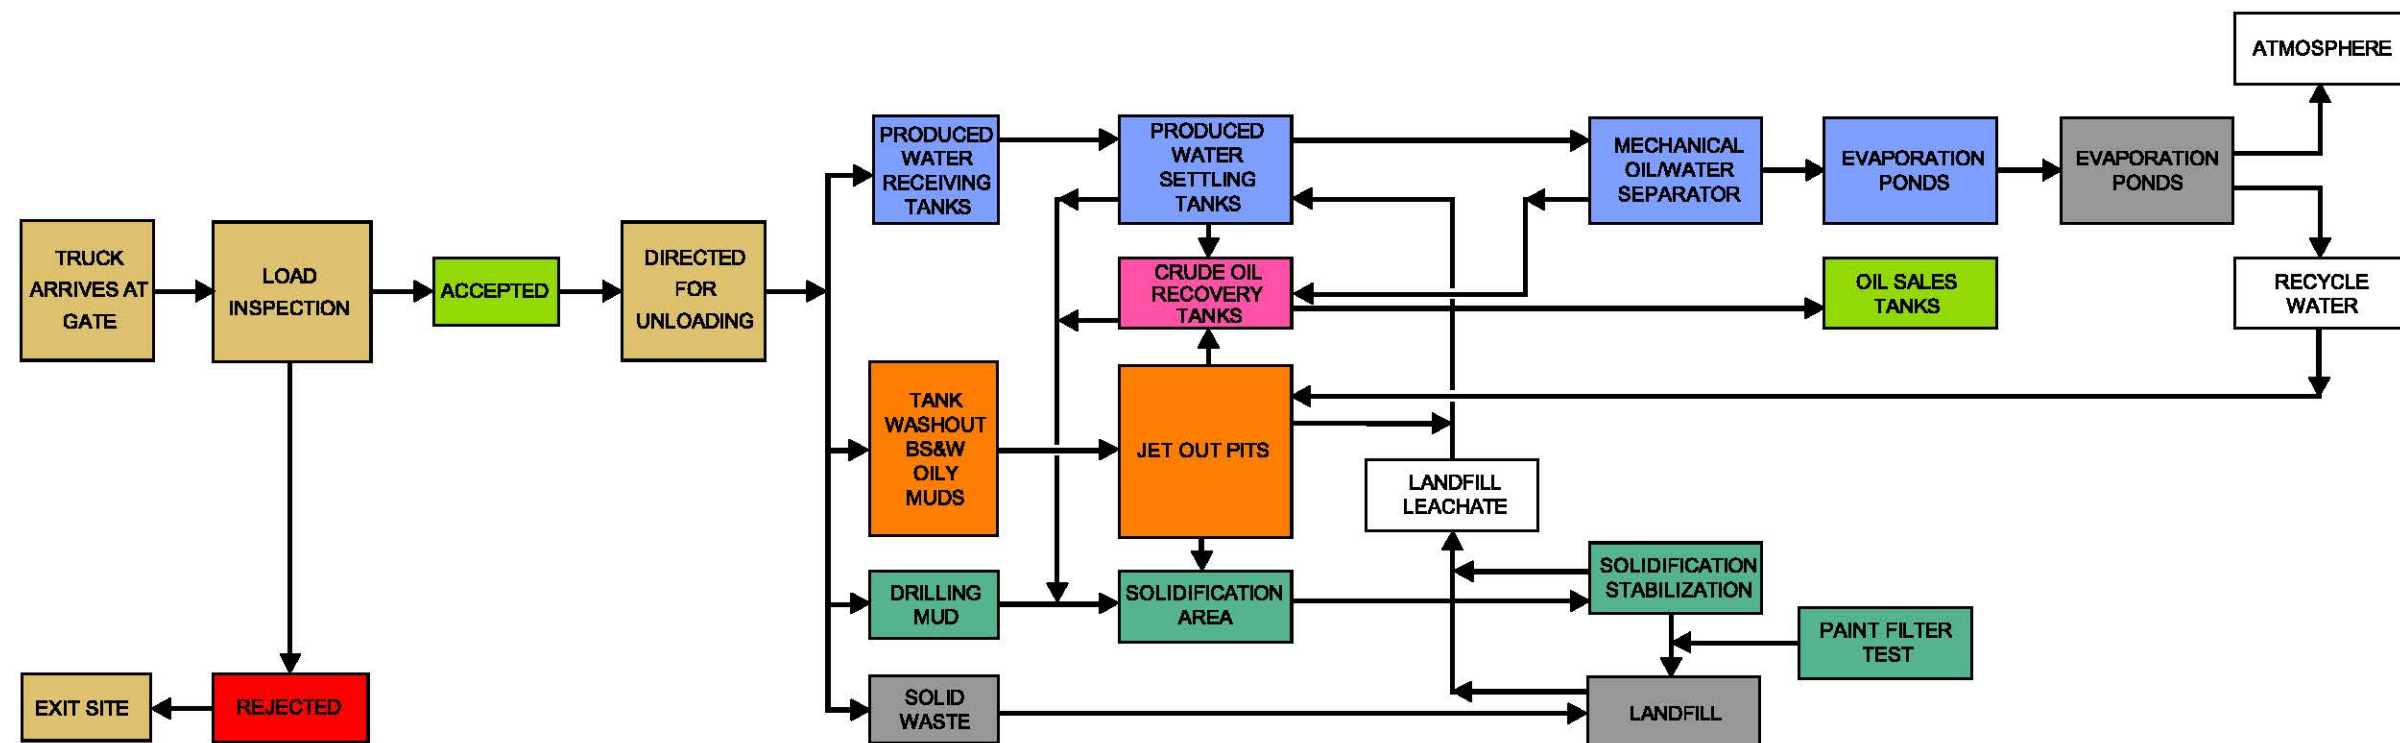

PROCESS FLOW DIAGRAM

DNCS ENVIRONMENTAL SOLUTIONS
LEA, COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8990
Fax: 505-867-8991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 06/10/2014 | GAD: PROCESS FLOW.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | FIGURE II.1.5A |

PROCESS DESCRIPTION:

- 1. A WASTE VEHICLE ARRIVES AT THE GATE.
- 2. PAPERWORK IS CHECKED AGAINST DNCS ENVIRONMENTAL SOLUTIONS RECORDS TO CONFIRM ACCEPTABLE DOCUMENTATION.
- 3. THE WASTE LOAD IS VISUALLY AND PHYSICALLY INSPECTED, AND EITHER ACCEPTED TO PROCEED FOR UNLOADING, OR REJECTED AND RETURNED TO THE GENERATOR.
- 4. ACCEPTED LOADS ARE DIRECTED TO ONE OF FIVE LOCATIONS:

TANKERS CONTAINING PRODUCED WATER ARE DIRECTED TO ONE OF SIX LOAD OUT POINTS AT THE PRODUCED WATER SETTLING TANKS MANIFOLD. PRODUCED WATER IS DISCHARGED INTO A 1,000 BBL SURGE TANK FOR INITIAL SETTLING AND SEPARATION. OIL ACCUMULATING AT THE TOP OF THE TANKS IS TRANSFERRED TO THE CRUDE OIL RECOVERY TANKS IF ADDITIONAL PROCESSING IS REQUIRED. PRODUCED WATER IS TRANSFERRED IN SERIES THROUGH FOUR 1,000 BBL OIL SEPARATION TANKS. UP TO FIVE DAYS TOTAL SETTLING TIME IS PROVIDED FOR THE PRODUCED WATER WITH AT LEAST ONE DAY HEATED. LIQUIDS ARE REMOVED FROM THE PRODUCED WATER SETTLING TANKS AND TRANSFERRED TO THE EVAPORATION PONDS THROUGH A MECHANICAL OIL/WATER SEPARATOR. SLUDGES AND SEDIMENT SETTLING TO THE BOTTOM OF THE TANK IS TRANSFERRED TO THE SOLIDIFICATION AND STABILIZATION AREA. MECHANICAL EVAPORATORS CIRCULATE THE WATER WITHIN THE EVAPORATION PONDS TO ENHANCE EVAPORATION TO THE ATMOSPHERE. SOME WATER IS RECYCLED TO THE TANKER JET OUT FOR TANK CLEANING.

TANKERS CONTAINING BS&W PROCESS WATER AND LIQUID TANK BOTTOMS ARE DIRECTED TO THE JET OUT PIT. ALL BS&W TANK BOTTOM LIQUIDS RECEIVED ARE DISCHARGED INTO THE JET OUT PIT. TANK TRUCKS ACCEPTED FOR WASHOUT ARE DIRECTED TO ONE OF SIX JET OUT PITS. APPROXIMATELY 10 BBLS OF FRESH/RECYCLED WATER ARE PROVIDED TO RINSE OUT THE INTERIOR OF THE TANKS. THE CLEANED TANK TRAILER IS RETURNED FOR SERVICE. OIL THAT ACCUMULATES AT THE TOP OF THE JET OUT PITS IS TRANSFERRED TO THE CRUDE OIL RECOVERY TANK FOR PROCESSING, IF REQUIRED. WATER THAT SETTLES TO THE BOTTOM OF THE TANKS IS TRANSFERRED TO THE PRODUCED WATER SETTLING TANKS. SLUDGES AND SEDIMENT SETTLING TO THE BOTTOM OF THE TANK IS TRANSFERRED TO THE SOLIDIFICATION AND STABILIZATION AREA.

THE CRUDE OIL RECOVERY TANKS SEPARATE THE OIL FROM ANY REMAINING WATER AND RETURNS THE WATER TO THE PRODUCED WATER SETTLING TANKS. SOLIDS RECOVERED FROM THE CRUDE OIL RECOVERY TANKS ARE REMOVED TO THE STABILIZATION/SOLIDIFICATION PROCESSING AREA. OIL RECOVERED FROM THE CRUDE OIL RECOVERY TANKS IS TRANSFERRED TO THE OIL SALES TANKS.

TANKERS CONTAINING DRILLING MUD AND CUTTINGS ARE DIRECTED TO THE SOLIDIFICATION AND STABILIZATION AREA. SLUDGES AND SEDIMENT COLLECTED FROM THE BOTTOM OF THE TANKS ARE SOLIDIFIED WITH A BULKING MATERIAL LIKE SAND OR ONSITE SOIL. DRILLING MUDS ARE SOLIDIFIED AND STABILIZED USING THREE PARTS SOIL TO ONE PART MUD PRIOR TO PAINT FILTER TEST AND LANDFILLING. LIQUIDS RECOVERED FROM THE SOLIDIFICATION/STABILIZATION PROCESS ARE TRANSFERRED TO THE PRODUCED WATER SETTLING TANKS.

LOADS OF CONTAMINATED SOIL AND SOLID WASTE ARE DIRECTED TO THE LANDFILL FOR DISPOSAL. LEACHATE GENERATED BY LANDFILL OPERATION MAY BE TRANSFERRED TO PRODUCED WATER SETTLING TANKS.

PROCESS FLOW DESCRIPTION

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8990
Fax: 505-867-8991

| | | |
|------------------|-----------------------------------|----------------------|
| DATE: 06/10/2014 | CAD: PROCESS FLOW DESCRIPTION.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | FIGURE II.1.5B |

The **Permit Plans (Volume II.1)** illustrate that the Facility will utilize the “area method” of filling in vertical lifts. The first lift of waste placed over a newly constructed liner segment will be a minimum of 5 ft in thickness, and will then be carefully worked out over the leachate collection protective soil layer from the edge of the cell (i.e., uncompacted). The first lift of waste over the leachate pipe may be pushed off from prior fill areas to avoid landfill equipment traffic over the pipe. If necessary, temporary “ramps” of waste and/or clean fill will be constructed over the leachate pipes and protective layer in order to facilitate traffic flow. The waste in the first lift will be carefully inspected to ensure that waste types that could impact the liner system (e.g., pipes and metal debris) are excluded from the initial lift. This layer will be placed in a manner that protects the liner and leachate collection system.

Waste placement will generally move from the lower (downgradient) portions of the cell to the higher (upgradient) elevations. With the exception of the first lift of oil field waste being spread on a newly constructed cell, waste will be compacted in shallow lifts (e.g., 2 – 3 ft thick) by specialized waste compaction equipment. Repeated passes by the waste compactor or dozer will consolidate the material to the smallest practical volume. This practice will confine the dimensions of the working face, maximize the use of available capacity, reduce the potential for future settlement, and limit the amount of cover required.

In order to control litter and mitigate potential odors, the active working face will be covered with 6 inches of soil cover, or an approved alternate cover, as needed. DNCS will place an intermediate cover at least 6-inches thick, in addition to daily cover, over areas of the landfill that will not receive further oil field waste for one month or more, but have not reached final elevation. Areas of intermediate cover will be properly sloped to promote clean run-off and minimize leachate generation, and may be used for temporary cover stockpiles. Intermediate cover may be seeded with temporary grasses such as rye if the area will not be subject to additional landfiling within 12 months. If long-term re-vegetation is required, native grass will be applied after consultation with the local Natural Resources Conservation Service (NRCS) representative (see Closure/Post-closure Plan, **Volume II.4**). Areas of intermediate

cover will be inspected periodically for erosion and settlement, and prompt regrading and maintenance action will be initiated as required. An Intermediate Cover Inspection and Maintenance Plan is provided as **Attachment II.1.G**.

5.5 Waste Capacity and Longevity

Table II.1.6 provides a projection of daily waste receipts and lists the categories of anticipated wastes that will be received at this facility. This estimate uses initial projected daily waste receipts of 500 yd³ per day average. Volumetrics (**Volume III.2**), summarizes the capacity and longevity calculations for the engineering design provided in this Application for Permit. The volume of excavation (cut) from the cells and drainage basins is designed to provide more than sufficient soil for daily, intermediate, and final cover for all Units. The DNCS Landfill (Phases I-III) gross airspace is approximately 39,669,800 yd³, with approximately 33,666,826 yd³ (i.e., 33,666,826 tons) of net airspace (i.e., waste capacity). The longevity of the Landfill, operating 365 days per year, is projected as follows:

- 184.5 years @ 500 tons per day
- 92.2 years @ 1,000 tons per day
- 36.9 years @ 2,500 tons per day

There are many factors that can have an impact on the duration of operations of the DNCS Landfill. Oil field activity, the price of oil in the marketplace spurring new development activities, closure of other disposal facilities, new processing technologies and the introduction of new waste streams have the potential to increase or decrease the rate at which airspace is depleted. In response to these factors, DNCS may make arrangements for the lease of additional equipment to accommodate variations in waste receipts.

5.6 Landfill Gas Safety Management

Surface waste management facilities that include a landfill are required to have a gas safety management plan per 19.15.36.13.O NMAC. The Plan should describe in detail the procedures and methods that will be used to prevent landfill-generated gases from interfering or conflicting with the landfill's operation, and methods to protect fresh water, public health, safety and the environment.

Landfill Gas (LFG) is typically produced when there is a significant supply of readily putrescible organic material, moisture; and a lack of oxygen in the fill. Oil field wastes do not contain significant amounts of putrescible (organic) wastes and will not provide a suitable environment for LFG production. Typical oil field wastes do not generate significant quantities of LFG, nor the requisite pressure to promote migration. Conventional landfill gas monitoring and control systems will not be effective at the DNCS Facility. The waste matrix itself will inhibit migration or collection of LFG if it is comprised primarily of soils with <5% degradable organics, as anticipated; therefore no conventional LFG monitoring or controls are proposed in this Application for Permit.

However, DNCS will implement a gas monitoring program consisting of testing incoming vehicles during unloading to ensure that hydrogen sulfide (H₂S) gas concentrations do not exceed 10 ppm on-site or at the property boundary. H₂S monitors that issue a visual and audible signal at 10 ppm will be installed in areas around the solid waste disposal cells, treating plant, liquid solidification, and evaporation ponds to ensure compliance with regulatory alert levels. Monitoring points may be added or replaced as operations are extended. Details of the H₂S gas monitoring program are presented in the Hydrogen Sulfide (H₂S) Prevention Contingency Plan provided in **Volume II.5**. In addition, the proposed vadose zone monitoring wells will be monitored for methane as part of routine vadose zone monitoring activities as described in the Vadose Zone Monitoring Plan (**Volume II.8**). These wells are capable of detecting gas in the in the flow zone before it reaches the property line.

5.7 Leachate Monitoring

A leachate management plan that describes the anticipated amount of leachate, leachate handling, storage and disposal is required for new landfills per 19.15.36.8.C(12) NMAC. A Leachate Management Plan for the DNCS Landfill is provided as **Volume II.9**. The Leachate Management Plan details the procedures that will be used to manage contact waters generated at the DNCS Landfill during the permit period and following closure. The Leachate Management Plan has been developed to address the design and performance requirements of 19.15.36.14 NMAC; and to addresses leachate management, including amounts and rates of leachate generation, treatment alternatives, disposal options, etc.

5.8 Waste Disposal Alternatives

DNCS Landfill is designed to operate as an all-weather facility under most foreseeable conditions. The site's proposed layout, paved roadways, and operating practices will provide flexibility with regard to fill face location and access. In the event of a temporary disruption to service such as storms or high winds, the following alternatives may be implemented:

- In the event of inclement weather, select a daily fill face location that is readily accessible to established roadways.
- The proposed equipment available for daily operations (see **Table II.1.5**) includes significant back-up for any unplanned downtime.
- Additional waste compacting and earthmoving equipment can be leased under routine arrangements with suppliers.
- Temporary storage of waste at the fill face could be implemented to address short-term equipment shortages.
- Waste compaction and covering tasks could be extended beyond normal hours to complete the day's activities.

In the unlikely event of a complete disruption of access, the Facility would be temporarily closed and the customers notified. The commercial waste flow could be temporarily stored at generator sites, or diverted to other OCD permitted facilities.

5.9 Operating Hours

DNCS plans to have continuous waste disposal services available twenty-four hours per day, seven days per week. These hours will be posted at the site entrance and will be subject to routine review and adjustment as required to match the availability of waste for disposal. DNCS may truncate operating hours due to reduced waste receipts, inclement weather conditions (e.g., high winds), etc. Site maintenance and construction activities, including cell preparation and application of cover, may take place at any time, even if the Landfill is not open for receiving waste.

5.10 Vadose Zone Monitoring

Vadose zone monitoring is described in detail in the Vadose Zone Monitoring Plan provided as **Volume II.8**. The proposed vadose zone monitoring program will initially include inspection of each well for the presence of fluid in advance of the applicable disposal area construction. After the initial inspection, each vadose well (VW) will be monitored for the

presence of free liquids on a monthly basis for a period of 12 months. If the monthly monitoring results continually indicate the absence of fluid, the subject wells will be transitioned to quarterly monitoring. The continued lack of fluids in the VWs may be the subject of future specific approvals by OCD for a reduced monitoring frequency (i.e., semi-annual or annual). Additional details are provided in **Volume II.8**.

6.0 LIQUID WASTE PROCESSING

6.1 Operational Rate

Liquid oil field wastes (produced water) will be accepted for processing at the DNCS Facility. The average operational rate for the fully developed DNCS Facility is estimated at 9,000 barrels per day (bbl/day) of liquid oil field waste. The operational rate may increase to over 12,000 bbl/day dependent upon market conditions and the rate of facilities development.

Basic Sediments and Water (BS&W) wastes will be accepted for processing at the DNCS Jet-Out Pit. The average operational rate for the fully developed Jet-Out operation is estimated at 1,000 bbl/day of BS&W wastes. The operational rate may increase to over 2,000 bbl/day dependent upon market conditions and the rate of facility development.

Drilling Mud waste will also be accepted for stabilization and solidification. The average operational rate for the fully developed stabilization and solidification area is estimated at 2,000 bbl/day depending on market conditions.

6.2 Processing

The equipment that anticipated to be used for liquid oil field waste processing is listed in **Table II.1.9**. Oil field waste receiving and processing activities will take place within the fenced Facility (**Figures II.1.2 and II.1.6**). A description of the liquid waste processing operation is provided on the Process Flow Diagram (**Figures II.1.5A and II.1.5B**). The location of the liquid waste processing facilities at DNCS is provided on the Processing Facility Layout provided as **Figure II.1.6** and detailed in the **Permit Plans (Volume III.1)**.

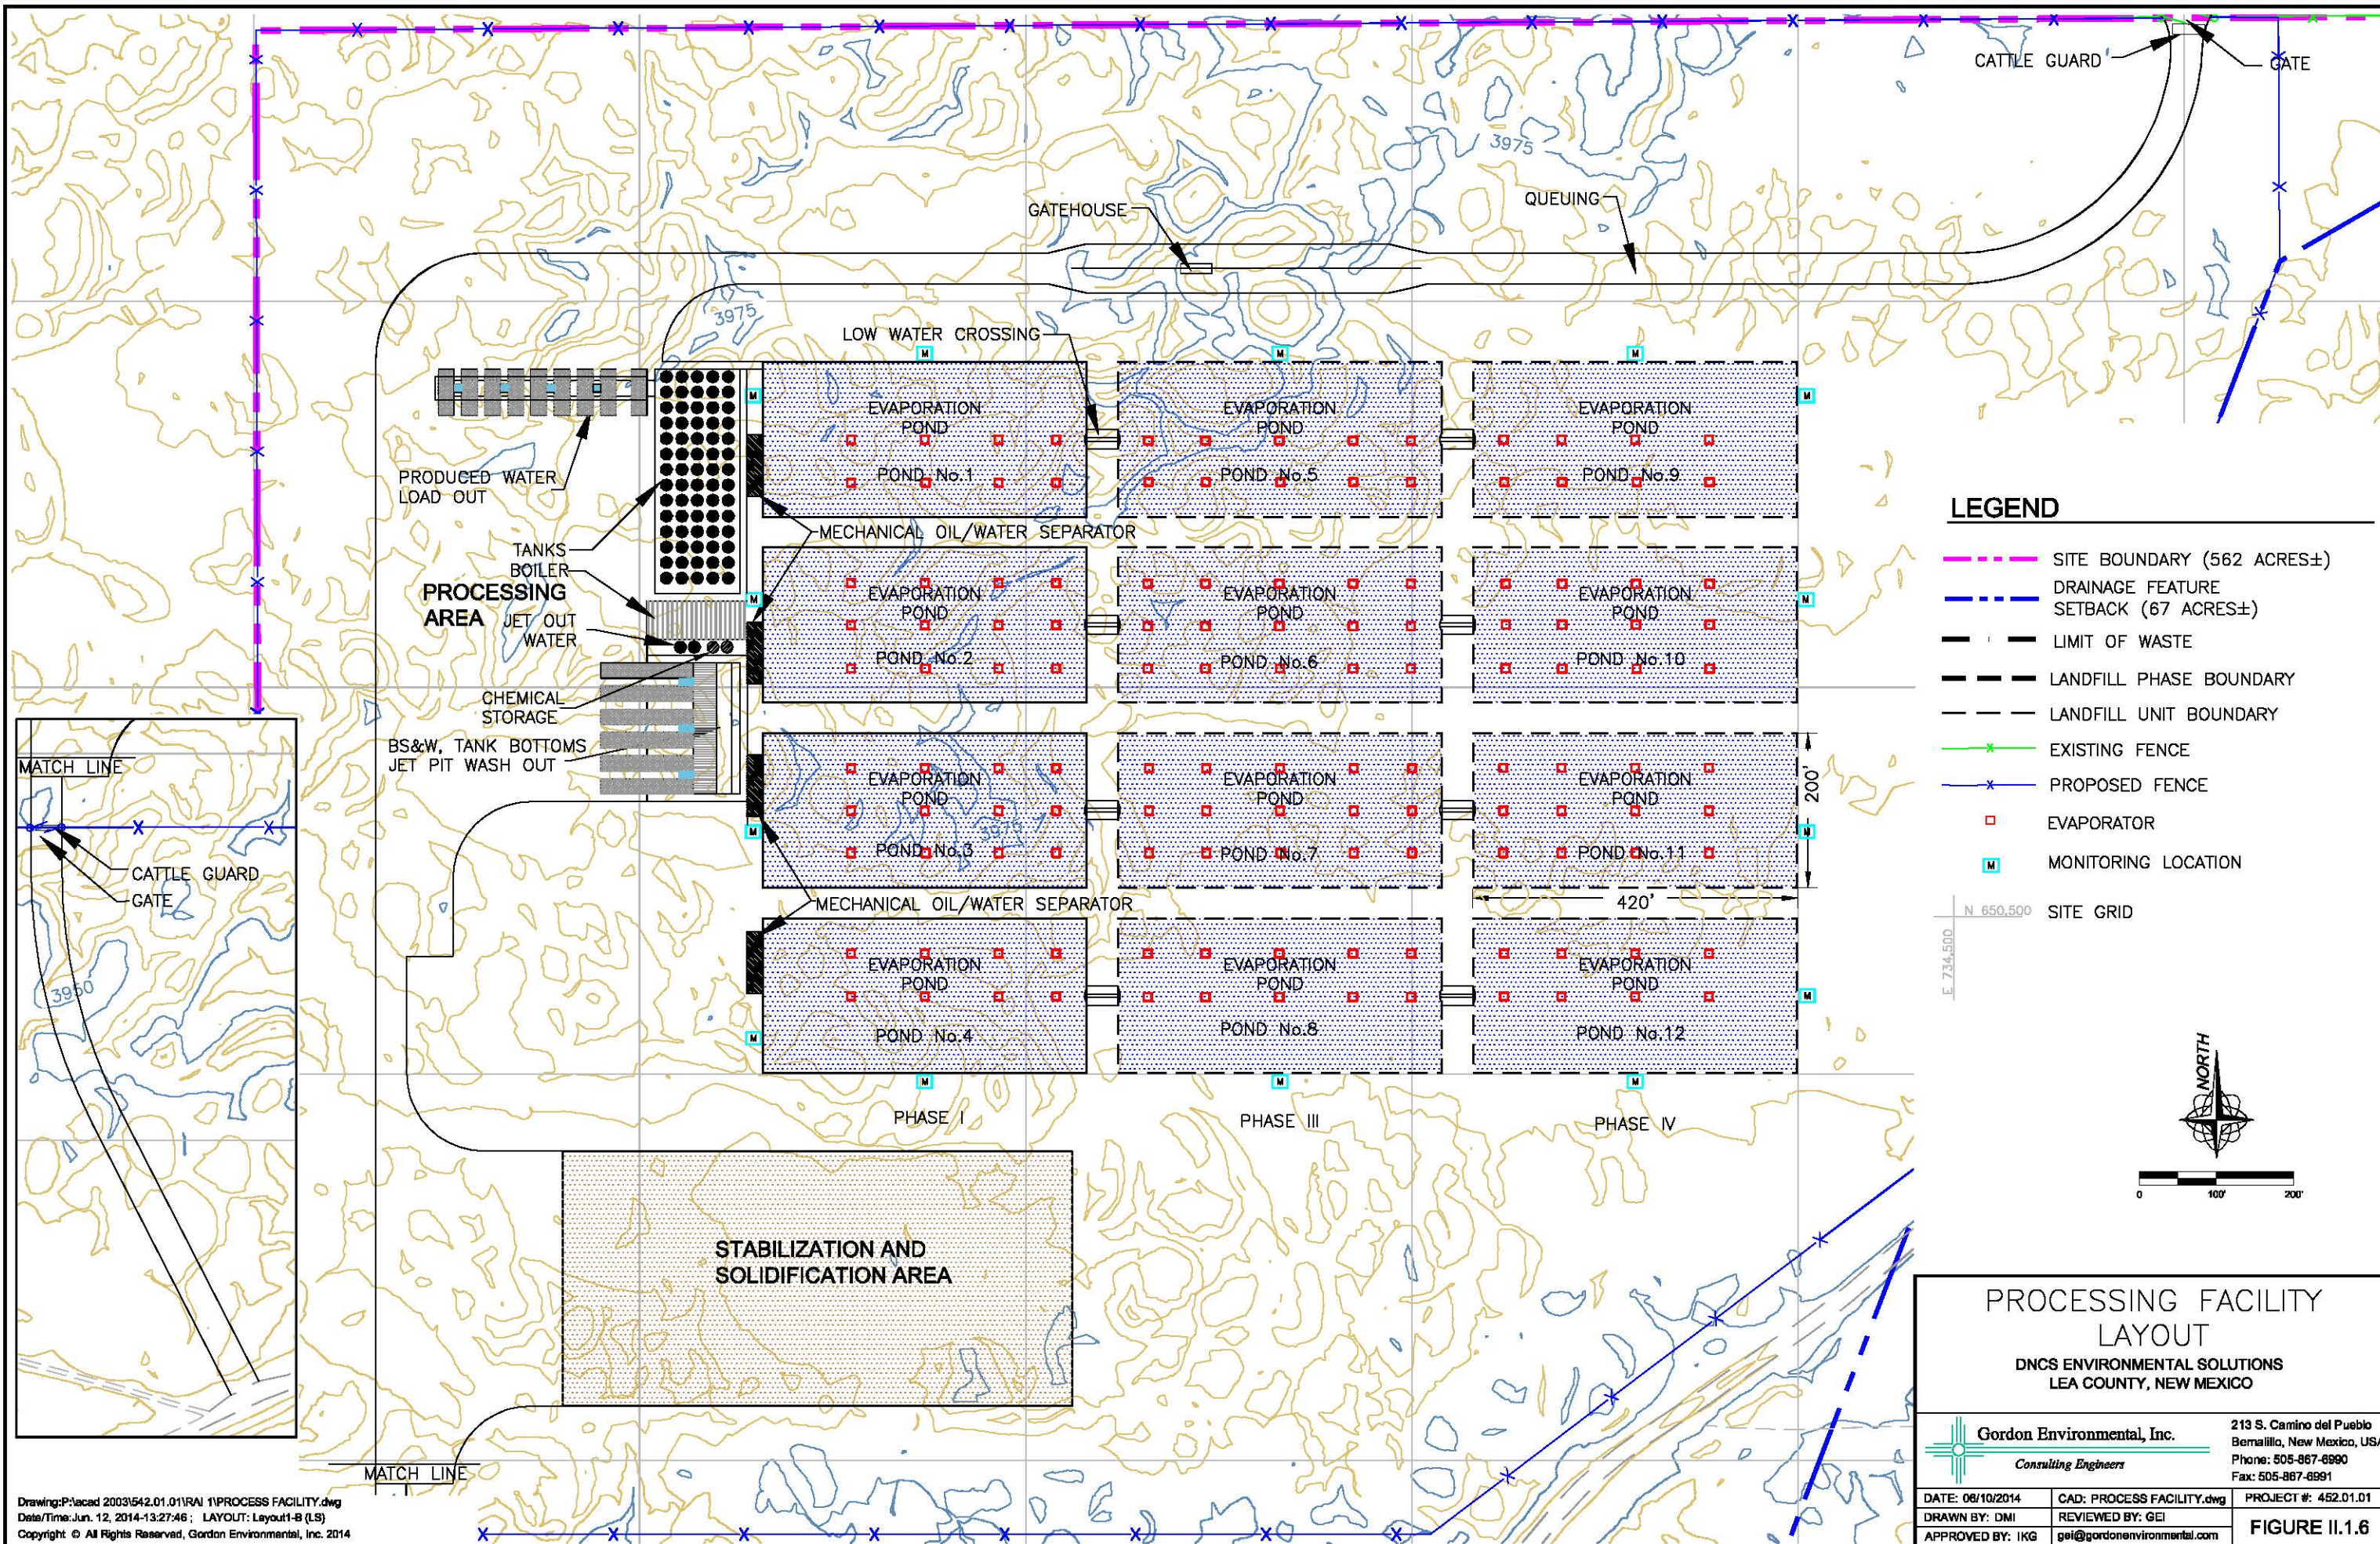


TABLE II.1.9
Processing Equipment
DNCS Environmental Solutions

| Description | Number | Capacity |
|---------------------------------------|---------------|-----------------------|
| Stationary | | |
| Produced Water Tanks | 60 | 1,000 bbl |
| Crude Oil Receiving Tanks | 5 | 1,000 bbl |
| Oil Sales Tanks | 5 | 1,000 bbl |
| Mechanical oil/water separation unit | 4 | 100 bbl |
| Evaporation Ponds (1-12) | 12 | 73,700 bbl |
| Mechanical Evaporation Units | 130 | 340 bbl/day/unit |
| Jet-Out Pit | 1 | 1,200 bbl |
| Stabilization and Solidification Area | - | 10 Acres |
| Boiler/Heat exchanger | 1 | Each |
| Burner fuel tanks | 1 | 238 bbl |
| Mobile | | |
| Rubber Tired Loader | 1 | CAT 950 or equivalent |
| Floatation Track-Dozer | 1 | CAT D-6 or equivalent |
| Off Road Dump Truck | 1 | CAT 725 or equivalent |
| Roll-off Boxes | 5 | 5-40 cy |
| Roll-off Tilt-frames | 1 | Up to 40 cy boxes |

Note: The number, type, and capacity of the processing may be adjusted in response to changes in waste receipts, waste types, new technologies, etc.

The produced water processing rate is highly dependent upon evaporation, which is also influenced by climate and seasonal fluctuations (Evaporation Calculations, **Volume III.10**). When tanks and ponds are approaching capacity, acceptance of liquid oil field waste may be temporarily suspended. Specifications for the proposed treatment plant equipment, including the produced water processing tanks, boiler, the diffused air floatation system, and mechanical evaporation systems are included in **Attachment II.1.B**. Receiving and storage tanks used at the Facility will be leak-proof; compatible with the proposed waste stream; and manufactured of non-biodegradable materials (e.g., fiber reinforced plastics or steel).

Produced Water will be received through the Produced Waste Load-Out stations and transferred to the heated Produced Water Receiving Tanks. Oil, water and sediments will be removed as the Produced Water passes through a series of these tanks. Water discharge from the tanks will flow through a diffused air flotation (DAF) system to remove residual oils prior

to entering the evaporation ponds. The ponds will be monitored to confirm that the DAF is adequately removing oil from the liquids discharged to the pond. Oil that accumulates in the ponds will be skimmed and removed for additional processing. Oil collected from the Produced Water Receiving Tanks will be transferred to the Crude Oil Receiving Tanks for final dewatering prior to storage in the Oil Sales Tanks. Liquids within the ponds will be pumped through mechanical evaporators to dissipate the liquid to the atmosphere.

BS&W waste will be discharged to the Jet-Out Pit where solids will be allowed to settle and liquids will be removed for processing through the Produced Water processing system. Solids removed from the Jet-Out Pit will be transferred to the Stabilization and Solidification Area for processing prior to landfilling. Fresh water will be available to flush out the tankers after they discharge their contents.

Drilling Muds and other wet solids will be deposited in the Stabilization and Solidification Area. Dry soil will be mixed with the deposited materials to solidify them to a level that they will pass the Paint Filter Test (**Attachment II.1.F**). Once solidified, the resulting material will be transported to the landfill for disposal. Liquids collected in the Stabilization and Solidification Area Sump will be transferred for processing through the Produced Water Processing System.

7.0 FACILITY INSPECTION AND MAINTENANCE

General inspection of the overall physical condition of the DNCS Facility, including pond operations, treatment plant, tank farm, evaporation spray system, jetout pit, stabilization and solidification area and the landfill will be conducted on an ongoing basis by DNCS personnel when operations are active. Additional formal inspections will be conducted and recorded on the appropriate recordkeeping forms as listed in **Table II.1.10**. Templates for the inspection forms are provided as **Attachments II.1.C** and **II.1.D** and will include the inspection date, and the name and signature of the inspector. Inspections and maintenance operations will be completed in compliance with 19.15.36.13.L NMAC. The following sections describe the formal inspections for each component of the DNCS Facility.

TABLE II.1.10
Facility Inspections
DNCS Environmental Solutions

| Section | Component/Details | Frequency¹ | Recording Form |
|----------------|---|------------------------------|---|
| 7.1 | Evaporation Spray System Weather station Plume height Over spray | Daily | Facility Inspection Form (Attachment II.1.C) |
| 7.2 | Solid Waste Disposal Landfill Disposal operations and location Free liquids Stormwater controls Litter, vectors, odors Daily cover | Daily | Facility Inspection Form (Attachment II.1.C) |
| 7.3 | Overall Facility Operation Signs Security (fencing/gates) Stormwater control systems (runon/runoff) Access roads OCD Permit compliance Construction activity | Weekly | Facility Inspection Form (Attachment II.1.C) |
| 7.4 | Treatment Plant, Tanks and Sumps Containment berm Tank condition Tank leak test (annual) Signage Pipe and valve condition Sump condition | Weekly | Facility Inspection Form (Attachment II.1.C) |
| 7.5 | Tank Farm & Pump System (Process Area) Containment and liner Tank condition Tank leak test (annual) Signage Pipe and valve condition Sump condition | Weekly | Facility Inspection Form (Attachment II.1.C) |
| 7.6 | Pit and Pond Operation Depth of liquids in sumps Pond levees Piping condition and status | Weekly | Pond Integrity/Leak Detection Inspection Form (Attachment II.1.D) |
| 7.7 | Solid Waste Disposal Landfill Leachate Collection Sump | Monthly | Facility Inspection Form (Attachment II.1.C) |
| 7.8 | Pond Containment System Rainfall Wind speed/direction Damage assessment | Quarterly | Pond Integrity/Leak Detection Inspection Form (Attachment II.1.D) |
| 7.9 | Landfill and Process Area Vadoze Zone Monitoring | Quarterly | Facility Inspection Form (Attachment II.1.C) |

Notes:

¹ When operations are active.

² Report discovery of liquid in the leak detection system to OCD within 24-hrs of observation.

7.1 Mechanical Evaporation System (Processing Area)

The evaporation ponds will rely on mechanical evaporators to enhance the rate of evaporation of the overall system. Specifications for the spray systems are included in **Attachment II.1.B**. The mechanical evaporation system will be inspected on a daily basis when operations are active with maintenance performed on an as-needed basis. The inspections will be documented on the Inspection Form included as **Attachment II.1.C**. At a minimum, the mechanical evaporation system weather station (set at a wind velocity threshold of 12 mph) and spray system plume height will be checked during the daily inspection. The plume height will be adjusted to an elevation that prevents overspray from leaving the confines of the evaporation ponds.

7.2 Solid Waste Disposal Landfill

The solid waste disposal area will typically be inspected on a daily basis when operations are active. The inspections will be documented on the Inspection Form, included as **Attachment II.1.C**. At a minimum, the items listed in **Table II.1.10** will be checked during the daily inspection. During the inspection, current disposal locations and operations will be compared to the OCD-approved DNCS Permit, with any deviations recorded and reported to the Facility Manager. The inspector will also evaluate and record the potential presence of free liquids derived from disposal activities; the condition of stormwater run-on/runoff controls; and the presence of windblown debris, vectors, or odors. Finally, the inspector will record the condition of previously applied soil cover and need for additional cover, grading or vegetation. Deficiencies will be repaired or addressed as soon as practical.

7.3 Overall Facility Operation

A thorough inspection of the specific processing areas, landfill, and sumps will be conducted on a weekly basis when operations are active and documented on the Facility Inspection Form included as **Attachment II.1.C**. The overall Facility inspection portion of the form will, at a minimum, document the items listed in **Table II.1.10**. Should the inspector note on the inspection form construction, planned construction or major design or operational changes, OCD will be notified and approvals obtained, if necessary. Inspection forms will be kept and

maintained at the DNCS Facility Administrative Office or other secure location and be made available for OCD review upon request.

7.4 Treatment Plant, Tanks and Sumps (Processing Area)

The processing area physically separates oil from water through the use of tanks and other equipment. Weekly inspections of the processing area and tanks will be conducted. The inspections will be documented on the Inspection Form included as **Attachment II.1.C**. At a minimum, the inspections will include and document the items listed in **Table II.1.10**. Any equipment identified during inspections or mechanical testing which require corrective action will be taken offline until repairs are completed as necessary.

The Treatment Plant will be inspected for proper function of the boiler plant, piping and proper liquid flow operation. Should any defect that seriously jeopardizes the plant operation or safety of the operation be identified, the system will be shut down until repairs are completed. Pond detection sumps will be inspected at least weekly, and fluid will be removed as necessary to prevent overflow. If the sump integrity has failed, OCD will be notified within 48 hours of discovery, and the sump contents and associated contaminated soil will be removed and disposed of in the solid waste disposal area. A report describing subsequent investigations and remedial actions taken will be submitted to OCD.

7.5 Tank Farm and Pump System (Processing Area)

The Tank Farm is designed to contain the capacity of the maximum number of interconnected tanks plus 30%. In this case, there is a maximum of five 1,000 bbl tanks connected for a total of 5,000 bbl. The tank farm is designed to accommodate in excess of 6,500 bbl before flowing to the evaporation ponds. Once the DNCS Facility is permitted; a Spill Prevention, Control, and Countermeasures (SPCC) Plan that applies to petroleum product storage and distribution systems will be developed. Weekly inspections of the tank farm will be conducted in compliance with the SPCC Plan. At a minimum the inspections will include and document the items listed in **Table II.1.10**. The inspections will be documented on the Inspection Form included as **Attachment II.1.C**. Any items identified during inspections which require corrective action will be addressed immediately, and if required, the specific process

equipment will be taken offline until repairs are completed. Detection sumps will be inspected monthly. If the sump integrity has failed, OCD will be notified within 48 hours of discovery, and the sump contents and contaminated sediments will be removed and disposed of at DNCS or another OCD-approved facility. A report describing subsequent investigations and remedial actions taken will be submitted to the OCD.

7.6 Pond Operation (Processing Area)

A thorough inspection of the leak detection system and sump will be conducted on a weekly basis and documented on the Pond Integrity/Leak Detection Inspection Form included in **Attachment II.1.D**. At a minimum, the items listed in **Table II.1.10** will be documented. Prior to placing a newly constructed pond or a pond that has undergone repair or cleaning into service, liquids will be removed from above the primary liner and from the leak detection system. Once in service, it is anticipated liquid may be present at all times due to condensation and nominal leakage through the primary liner. The sumps are 2 ft deep and have a capacity of >1,200 gallons (gal) using a porosity of 35% for the granular material (3/4" – 2" select aggregate). **Attachment II.1.E** is a summary table from an authoritative publication on potential geomembrane liner leakage for 40 mil high density polyethylene (HDPE) lined ponds. As shown on the table, the combined projected permeation/pinhole leakage rate ranges from 9.5 to 138 gal/acre/day. Using a very conservative value of 75 gal/acre/day for the combined leakage/permeation rate (**Attachment II.1.E**), this provides 16 days of storage at a depth of 2 ft in the sump. The rate of 75 gal/acre/day is considered very conservative as it is based on 40 mil HDPE (vs. the actual 60 mil HDPE pond liner provided); a fluid depth of 10 ft; and a high number of large pin holes. As additional protection, a geosynthetic clay liner (GCL) will be installed under the leak detection sumps (**Volume III.1, III.3, and Permit Plans**).

The liquid levels in the sumps will be monitored approximately weekly immediately after ponds are put into service and documented. Should the lack of liquids become apparent after a series of inspections, the monitoring frequency may be extended to monthly. Upon discovery of excessive liquid presence in a leak detection system (i.e., > 2 ft), OCD will be notified within 24 hours and the affected pond area drained. Prior to placing the pond back into service, DNCS will initiate corrective action which may include but is not limited to:

- Actions undertaken to locate source(s) of leakage
- Repair procedures
- More frequent sump liquid level monitoring and/or pumping
- Liquids testing
- Vadose monitoring (if required)

7.7 Pond Containment System (Processing Area)

A thorough inspection of the berms and the outside walls of pond levees will be conducted at least quarterly, and after any major rainfall or windstorm. For purposes of this inspection frequency, a major rainfall is defined as a documented 25-year, 24-hour rainfall event, and a major windstorm is defined as sustained wind speeds in excess of 45 mph for a one hour period. The inspections will be documented and retained on the Pond Integrity/Leak Detection Inspection Form included in **Attachment II.1.D**. At a minimum, the inspection shall consist of the items listed in **Table II.1.10**. The inspection will address any erosion, liner damage and maintenance required with a timeframe to complete required repairs. In addition, the depth of sludge build-up in the bottom of the pond will be measured during the quarterly inspections and documented. Sludge in excess of 12 inches will be removed, dewatered, stabilized and disposed of on-site or at an OCD-approved facility.

7.8 Below-grade Tanks and Sumps

No below-grade tanks or sumps, other than the sumps previously mentioned with the leak detection system, are proposed for the DNCS Facility.

8.0 EMERGENCY SITUATIONS AND EQUIPMENT BREAKDOWN

Response to emergency situations involving the actions of the Emergency Coordinator, fire prevention and protection, incident response, and notification procedures are described in detail in the Contingency Plan (**Volume II.5**).

8.1 Equipment Breakdown

In the case of unplanned equipment downtime, the following measures will be deployed:

- Delivery of liquid oil field waste will be delayed if storage capacity is unavailable in the receiving tanks.

- Downtime associated with mobile equipment (i.e., skid-steer loader, forklift) will be addressed by deploying alternative on-site units (e.g., end loaders) and arrangements with local equipment vendors for immediate maintenance and lease of temporary replacement units.
- DNCS's proposed preventive maintenance plan has proven to be highly effective at preventing unplanned downtime through routine inspection and regular maintenance of processing equipment.

9.0 RECORD KEEPING REQUIREMENTS

DNCS is required to keep detailed records for the DNCS Facility as described throughout this Application. In addition, the Facility will meet the OCD requirements for reporting as detailed in the Management Plans provided in **Volume II** of this Application. Records will be retained for a minimum of 5 years and will be made available for OCD review and inspection upon request.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.A
SAFETY COMMUNICATIONS PROGRAM (TYPICAL)**

ATTACHMENT II.1.A
Safety Communications Program (Typical)
DNCS Environmental Solutions

Safety Meeting Attendance Sheet

Date: _____ Time: _____

Topic: _____

Presenter: _____ Department: _____

Instructions:

1. This form must be completed at each safety meeting.
2. Make additional copies as required.
3. Keep copy of completed attendance sheets in binder.

Printed Name

Signature

Absent

Date Covered

ATTACHMENT II.1.A
Safety Communications Program (Typical)
DNCS Environmental Solutions

Annual Training Schedule¹

| Month | Yard Topics | Office Topics |
|------------------|---|---|
| January | Lockout/Tagout Program SWPPP Good Housekeeping | Lockout/Tagout Program SWPPP Good Housekeeping |
| February | Material Acceptance & Handling Form C-133 & C-138 reconciliation H ₂ S screening | Material Acceptance & Handling Form C-133 & C-138 reconciliation H ₂ S screening |
| March | Non-exempt liquids recognition H ₂ S Treatment Procedures | Non-exempt liquids recognition H ₂ S Treatment Procedures |
| April | Site Contingency Plan H ₂ S Contingency Plan Hazard Communications Emergency Evacuation Drill | Site Contingency Plan H ₂ S Contingency Plan Hazard Communications Emergency Evacuation Drill |
| May | Spill Prevention & Control Site Generated Waste Disposal Heat Stress | Spill Prevention & Control Site Generated Waste Disposal Heat Stress |
| June | Confined Space Site Inspection Incident & Injury reporting First Aid/Bloodborne Pathogens | Confined Space Site Inspection Incident & Injury reporting First Aid/Bloodborne Pathogens |
| July | Migratory Bird Prevention | Migratory Bird Prevention |
| August | Employee Safety PPE 3-Point Contact | Employee Safety PPE 3-Point Contact |
| September | Industrial Powered Trucks Skid Loader Sky Trak Loader High Voltage Training | Recordkeeping |
| October | Cold Weather Stress Fire Extinguisher Use | Cold Weather Stress Fire Extinguisher Use |
| November | Sexual Harassment Drug & Alcohol Cell Phone usage | Sexual Harassment Drug & Alcohol Cell Phone usage |
| December | Employee Benefits Temp. Employee Safety | Employee Benefits Temp. Employee Safety |

Note:

¹ Typical training schedule and content subject to change


**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.B
EQUIPMENT SPECIFICATIONS**



Air & Water Treatment Solutions
(888) 326-2020 / (678) 514-2100



Distributors and Reps Wanted! (click here)

Home | Online Store | Forms | Contact Us | About Us | Calculators | Site Map | Search Site



➤ Applications

- Automotive
- Biodiesel
- Car Wash Industry
- Dairy Industry
- Food Processing Industry
- Iron Removal
- Latex Removal
- Metals Treatment
- Mining Industry
- Odor Control
- Petrochemical Industry
- Poultry Industry

➤ Products

- Activated Carbon
- Air Treatment Systems
- Bag Filtration
- Biological Treatment
- Chemicals (Specialty)
- Clarifiers
- Dissolved Air Flotation
 - Integrated Treatment Systems
 - V-Series Industrial DAF
- Dewatering
- Dust Collection
- Electrocoagulation
- Evaporators
- Filter Screens
- Membrane Filtration
- Microbial Bacteria
- Oil/Water Separators
- Ozone
- Polymer Blenders
- Pressure Filtration
- Separators/Strainers
- Tanks
- Wet Scrubbers

DAF Systems > Dissolved Air Flotation (DAF) Systems (V Series)

Up To 99.9% TSS/FOG Removal and 75% BOD Reduction... Unmatched Performance!

Dissolved Air Flotation (DAF) is a water treatment process that clarifies wastewater through the removal of suspended matter such as oil, greases or solids. Removal is achieved by injecting pressurized air into the wastewater where micro-bubbles then interact with the suspended solid particles. This interaction causes these particles to float to the surface of the DAF where they are then skimmed and separated.

V-Series Dissolved Air Flotation systems benefits:


- Performance guarantee providing assurance that your discharge requirements will be met or exceeded.
- Cleanest effluent levels of any Dissolved Air Flotation (DAF) presently available with TSS as low as 5 ppm.
- Lowest ongoing maintenance requirements of any Dissolved Air Flotation (DAF) system.
- Compact, optimized foot print that is also easy to operate and maintain.
- Capable of producing 10% dry sludge.

Technical Benefits:

- Increased air to solid ratio.
- Air bubbles down to 5 microns in size (allowing for greater sludge separation and dryer sludge).
- Multi-Point Air Injection creating a constant upward pressure on the sludge.
- Counter Flow Sludge Skimming eliminating possibility of driving sludge back into the cleaner water.
- V-Weir and skimmer system polisher at the final stage of the process, resulting in lowering TSS count in effluent water.

Ecologix High Performance 99.9% TSS/FOG & 75% BOD Reduction - Dissolved Air Flotation System

| Model | Flow Rate Based Upon | |
|------------------------|----------------------|---------------------|
| | (up to) 2500 ppm TSS | 2500 - 5000 ppm TSS |
| V-409 | 60 GPM | 30 GPM |
| V-410 | 100 GPM | 50 GPM |
| V-512 | 200 GPM | 100 GPM |
| V-617 | 400 GPM | 200 GPM |
| V-725 | 600 GPM | 300 GPM |
| V-730 | 800 GPM | 400 GPM |
| V-735 | 1000 GPM | 500 GPM |
| V-818 | 600 GPM | 300 GPM |
| V-824 | 800 GPM | 400 GPM |
| V-830 | 1000 GPM | 500 GPM |
| V-930 | 1200 GPM | 600 GPM |
| V-1035 | 1400 GPM | 700 GPM |
| V-1040 | 1600 GPM | 800 GPM |
| V-1045 | 1800 GPM | 900 GPM |
| V-1145 | 2000 GPM | 1000 GPM |

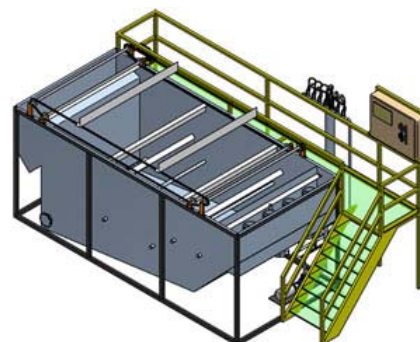

Click a model below to view detailed 3-D drawings



Ecologix V Series DAF Systems are a complete Dissolved Air Flotation System comprising the following components:

- 304 Stainless Steel construction.
- Overall customized to fit allocated space - Includes stainless header entering DAF including four ½" penetrations with ½" ball valves for whitewater addition/chemical addition/sample port.
- Recirculation aeration pump with aeration valves.
- Surface skimmer system complete with #50 SS chain and four (4) SS skimmer blades - Bolt-on and manually adjustable. VFD motor 0-13rpm, 195:1 gear reduction.
- Bottom settled solids removal cones with dump valves Effluent weirs with Quick-Release Locking Handles (manually adjustable)
- One (1) 2" air driven sludge transfer pump Staircase and Catwalk for DAF - Bolt work platform and staircase frame made of carbon steel with safety yellow fiberglass grating.
- Chemical Metering Feed Pumps (pH, Coagulation, Flocculation) Control System, featuring:
 - NEMA 4X stainless steel enclosure with fused disconnect(s).
 - Allen Bradley PLC Control System with touch screen - including aeration and chemical feed pumps
 - All necessary starters, fuse disconnects, status lights, switches.
 - Common 460V/3/60 power supply required.
 - Common 460V/3/60 power supply to be provided by customer.

General Description

DAF is a highly efficient method for removal of turbidity, color, suspended solids and other contaminants from water. A recirculation loop of pressurized water is saturated with dissolved air using a multistage impeller pump. The product of this process is termed "whitewater." Whitewater discharges into calculated points along the pipe flocculator. Microscopic air bubbles become entrained in the floc particles. When the floc particles leave the pipe flocculator and enter the body of the DAF, they rise to the surface and form a sludge blanket. As the sludge blanket thickens, a skimmer drive transfers sludge to the DAF sludge sump. From the sump, sludge is pumped to dewatering equipment. The treated water gravity flows from the DAF vessel to a clear well or city discharge point.

Flocculation Mixing Tube

The flocculator is designed to thoroughly mix raw influent with water treatment polymers and dissolved air. It consists of a spiraled mixing tube with strategically placed polymer injection ports, highly aerated/pressurized water, and sample ports. A metered control valve manifold ensures accurate flow of pressurized, highly aerated water into the mixing pipe flocculator to enhance coalescing of microscopic air bubbles and wastewater mixing. Polymer injection ports are quick-connected, allowing easy removal and re-insertion during system operation. The Dissolved Air Flotation process utilizes design principles unique to our DAF system. The design allows for highly effective flocculator units to be installed in a footprint significantly smaller than that of other systems. Plant wastewater enters the DAF system via an ascending pipe flocculator which acts as both a flash mixer (lower section) and a gentle mixer (upper section) for superior flocculation.



Pressurized Water Recirculation

Clean, treated water removed from the wastewater discharge cell is pressurized and fed back into the system via inlet ports on the flocculator. Additionally, pressurized water is injected into the flotation cell. The Pressurized Recirculation Loop Creates Whitewater, which is a key factor to water treatment success. The Pressurization Pump is sized to provide adequate recirculation water flow at 400' TDH. The pump is installed on the DAF flotation cell skid. The Air Dissolving Tank provides the retention time necessary to allow injected air to dissolve, creating "whitewater". The tank is supplied complete with internal piping, inlet/outlet flanges, pressure gauge, pressure bleed-off valve, and air control assembly (solenoid valve, filter/ regulator/gauge, rotometer, and check valve).



The pumps we use are side-channel multi-stage pumps, which is a unique product with characteristics of both displacement pumps and centrifugal pumps. At low flow and high pressures, our self-priming pumps have a noticeable advantage over centrifugal pumps. It allows trouble free handling of Maximum gas contents of 50% and attains pump heads which are many times greater per stage than that generated by radial flow centrifugal pumps. These pumps are essentially immune to cavitation at variable vapor pressure and therefore flow is not interrupted during partial degassing. The pressure rate is up to 10 times higher than that generated by normal pump impellers rotating at the same speed. The best part is that we can generate more air with extremely small bubble sizes of 20 microns and smaller that remain in solution for over 30 minutes, resulting in extremely efficient separation of solids from the water and very dry sludge.

Dual Chamber Chemical Reaction Tank

The Reaction tank is designed specifically as an option to allow for longer chemical contact time. The tank allows for 5 minutes of chemical reaction time per chamber. The Dual Chamber Reaction Tank features plate mounted agitators and typically utilizes a Walchem dual probe pH controller to aid in automated chemical dosage and operator monitoring. The unit can also be outfitted with a stainless steel chemical metering pump stand for application of sulfuric acid, acidic coagulants or caustic soda. This feature allows for short distance pipe runs of hazardous chemicals and minimizes operator exposure.



Flotation Cell

The flotation cell is a rectangular vessel designed to provide controlled influent wastewater velocity and optimized surface area. It contains an inlet diffusion pipe, sludge rake, and one or more blow-down valves. The blow-down valve permits removal of the small portion of sludge that settles in the flotation cell.

Sludge Rake

The sludge rake assembly consists of a stainless steel chain and a three-blade scraper arrangement. The sludge scrapers skim the surface of the sludge in the flotation cell and transfer the floating solids to the sludge sump. From the sludge sump a pump removes the sludge to the Thickening/Sludge Dewatering Tank.



The Sludge Rake moves the Floating Sludge Blanket to the Sludge Sump for removal. The Sludge Rake Operates with Variable Speed Control on an Adjustable Timer that is Set According to Flow Rate and Solids Loading.

Sludge Sump

Thickened sludge skimmed from the DAF discharges into a sludge sump. The sump has a hopper bottom with inclined sides to allow sludge to gravity feed to the suction side of the sludge transfer pump.

Discharge Cell

The discharge cell is designed to allow clean, treated water to flow downward and away from rising sludge, and then upward through a clear-well section. It contains a wastewater baffle, adjustable weir, pressurized water diffusion pipe, and blow-down valve. Clean, treated effluent, flows down and under the flotation cell, upward through a clear-well and then over an adjustable weir into a collection launder. The weir is made to be adjustable with threaded bolts. A portion of the clean, treated water, is removed from this cell via a recirculation water header piped to the suction inlet of the pressurized water recirculation pump. A portion of the pressurized water is piped into the inclined section of the flotation cell. A blow-down valve permits removal of the small portion of sludge that settles in the discharge cell. As a result of these extra clarification steps our clean water is commonly as much as 5-6 times purer than other competitive DAF systems.

Clear Well & Dewatering

Some systems employ a clear well for finished clean water inspection, post pH adjustment, or as a short term holding reservoir when the water needs to be transferred to another location for discharge or reuse. The clear well is constructed as a low side wall stainless steel tank for easy visual reference of effluent quality.

Mechanical Construction

The DAF vessel is constructed of 304L Stainless Steel with suitable stiffeners to prevent deformation under all normal stresses incurred during erection and operation. The unit can also be skid-mounted for mobility. All joints are double welded and leak tested prior to shipment. A DAF-mounted catwalk and ladder are provided for operator access to the top of the DAF vessel on large units. Handrails are painted yellow per OSHA regulations. The DAF mixing-pipe flocculator is fabricated out of 304L Stainless Steel (316SS is optional). The flocculator is mounted on legs, and connects to the main DAF unit via a 150lb flange. The flocculator and DAF system are pressure tested prior to shipment.

Automatic Control Systems

The control panel for each system can be designed to include as much or as little automation as desired by the operator and project engineers. They are designed to provide fully automatic operation utilizing a PLC (Programmable Logic Controller). User interface with the control system is provided in the form of panel-mounted selector switches, Allen-Bradley AC variable drive terminals, a pH controller, alarm with lights/horn and a panel-mounted process display terminal. Process variables and chemical dosage set points are monitored and changed via the panel-mounted display terminal. Chemical pump rates follow process flow which is monitored and controlled by a magmeter and proportional valve. Polymer usage is automatically displayed in ml/min and lbs/day on the panel-mounted display. System kilowatt-hour usage is also monitored and displayed. A fail-safe operation mode is provided that will allow the system to be operated manually in the event of a computer malfunction. A semi-automatic mode is also designed into the Ecologix control system to provide maintenance and operational flexibility.

Sludge Holding Tank / Dewatering

The sludge that has been removed from the wastewater by the scraper is pumped into a sludge holding tank for further thickening. From there it is pumped into a dewatering system such as Filter Press or Belt Press for final dewatering. The end result is a 25%-50% dry sludge by weight that is solid to the touch and can be safely disposed of to a land fill.

Most common industries served by Ecologix DAF Systems

Food Processing:

- Dairy Plants
- Meat Processing/Packing (Beef, Pork, Poultry)
- Frozen Food
- All Other Food Processing Plants

Heavy Industry:

- Automotive Paint Lines
- Bio-Fuel Wastewater Treatment
- Metal Finishing
- Oil Drilling/Produced Water
- Tanker Deballasting
- PetroChemical Processing

Other:

- Ground Water Remediation
- Commercial Laundry/Linen Supply
- Ink & Dye Removal
- Landfill Leachate Wastewater

METALS REMOVAL

Removes all common metals to less than 1ppm and into the parts per billion (ppb) level count in a continuous flow process at flow rates up to and over 1,000 GPM. Oils, grease and other contaminants are removed in the same step. Because the CRM operates in a continuous process, you can run the rest of your plant without worrying about overloading the waste treatment system.

POULTRY PROCESSING

The V series DAF system for the Poultry Processing Industry treats every type of waste stream created by eviscerating, further processing and cleaning. The system operates in a continuous process using minimal amounts of chemistry in a self-contained, skid-mounted unit that uses little floor space and requires minimal operator intervention. *The powerful microscopic bubbles float solids to the surface as shown to the right.*

The Application

Ecologix supplies wastewater treatment systems to both poultry kill plants and further processing plants. Poultry processing creates different types of waste streams depending on the type of plant and its products.

Kill Plants

Plants that process chickens or turkeys and ice pack whole birds for shipping typically run two shifts which produce two distinct types of waste.

[\(System Design - Typical for Poultry Processing\).PDF](#)

First Shift (slaughter)

Dirt, grit from craws feathers, blood and feces from the eviscerating lines make up the waste stream. Turkey plants produce heavier loadings of dirt and grit.

Second Shift (cleaning)

This is the more difficult of the two streams being made up of blood and dirt combined with high pH cleaners. The timing of the waste flows is difficult as well. Chillers and scolders are usually dumped within an hour of one another. Systems must be sized to accommodate the surges especially in plants with contracted cleaning services where the contractor is under time restrictions and pushes the waste treatment system to its limit.

Further Processing

Whether combined with kill operations or a separate plant, further processing introduces a wide range of contaminants beyond those found in the birds themselves. Cooking produces large volumes of fat, oils and greases from the birds and from frying operations. Ingredients such as breading, seasoning, marinade, flour, starch and sugar complicate the waste treatment process. Flour and sugar, for example, quickly become dissolved making it extremely difficult to remove. Cleaning introduces high pH cleaners from boil-out steps and other cleaning operations.

The Challenge

The challenge is to design a waste treatment system that can handle the wide fluctuations in waste streams from shift to shift. Designing a good system requires an in-depth knowledge of the poultry industry and a specific understanding of each customer's operations. The system must be sized to accommodate the volume and timing of various flows. It must also easily adapt to changing waste conditions without putting unreasonable demands on the operators. Finally, a waste treatment system must be cost effective. It cannot use up vast tracts of valuable floor space nor can it use large quantities of chemicals. It must absolutely keep the customer in compliance with the POTW's discharge limits.

INDUSTRIAL LAUNDRY and TEXTILE RENTAL

Our DAF systems apply to both Industrial Laundry operations and Textile Rental companies operating their own washing plants.

The Application

Textile Rental Companies and Industrial Laundry Operations wash a wide variety of products from napkins and table linens to shop rags and floor mats. These different wash products produce different types of waste streams that can vary from batch to batch.

Challenges


Discharge limits imposed on laundries are becoming ever more stringent. Lower limits are forcing plant managers to upgrade existing waste treatment systems or install new systems where none were needed in the past.

Depending on the product mix in the washroom, the time of day, the season or other factors, the nature of the waste stream sent to the waste treatment system can fluctuate widely. Traditional waste treatment methods rely on large equalization tanks and long dwell times to archive proper treatment conditions. These systems use large quantities of chemicals and take up vast amounts of valuable floor space. On top of the waste treatment challenges, water supplies are dwindling and the cost of clean incoming plant water is becoming significant.

DAF SHIPPING PHOTOS



DAF CONTROL PANEL PHOTOS

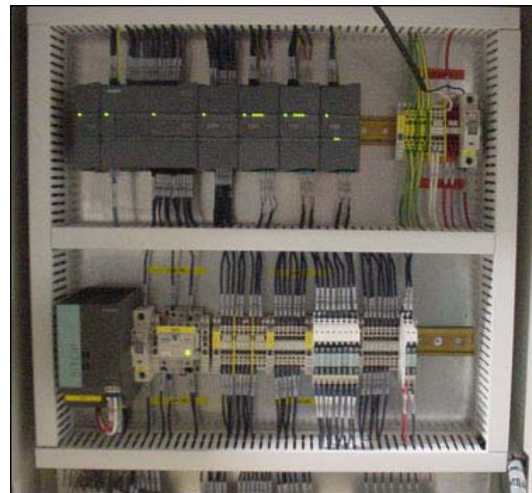

[Activated Carbon](#) |
 [Aeration](#) |
 [Air Treatment](#) |
 [Bag Filters & Housings](#) |
 [Chemicals](#) |
 [Dissolved Air Flotation](#) |
 [Dust Collection](#) |
 [Evaporators](#) |
 [Filter Presses](#) |
 [Flocculation](#) |
 [Inline Filter Vessels](#) |
 [Membrane Filtration](#) |
 [Odor Control](#) |
 [Ozone](#) |
 [Oil Water Separators](#) |
 [Sewage Systems](#) |
 [Liquid and Vapor Phase Vessels](#) |
 [Wet Scrubbers](#)





High-Tech Consultants, Inc.

Earning the Right to Work for You

HOME

OIL FIELD
PRODUCTION
FACILITIES

VAPOR EMISSION
CONTROL SYSTEMS

WATER
CLARIFICATION

TECHNICAL PAPERS

QUESTIONNAIRE

CLIENTS AND
PROJECTS

F.A.Q.'s

CONTACT US

Water Clarification



High-Tech Designs That Work For You

Water treating is often considered a "black art". That it is little understood in the oil production industry may be an understatement. The fact is that water treating is a very complex issue; too complex to be mixed with other operational issues. Few operators have the luxury of a staff with enough time to fully comprehend the subject. And so, the subject of water treating is rarely adequately addressed. This costs the industry hundreds of millions each year in plugged disposal and injection wells, pipelines, tanks, and in lost productivity.

Clean water can be injected or disposed of at almost no cost to the produce. However, water with just a few parts per million of oil and iron sulfide can cost millions.

HTC developed the HWSB™ design to produce high quality water without a pressure vessel, without filtration, and without moving parts. This High-Tech design is so innovative it was granted patents in the US and Canada.

The HWSB™ is over 70% hydraulically efficient. This compares to <3% for most other designs.

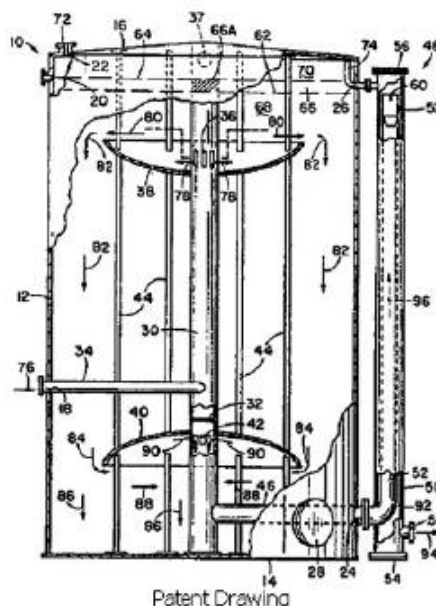

HOME PAGE | OIL FIELD PRODUCTION FACILITIES | VAPOR EMISSION CONTROL SYSTEMS
WATER CLARIFICATIONS | TECHNICAL PAPERS | QUESTIONNAIRE | FAQ's | CONTACT US

©2005 HIGH-TECH CONSULTANTS, INC. All rights reserved.

SMI 420F EVAPORATOR



OVERVIEW

The SMI® 420F Evaporator is a floating unit, designed for effective operation in small areas, especially sites containing large particles or highly corrosive water. The 420F Evaporator is durable, simple to use and easy to maintain – a reliable way to manage excess water.

BENEFITS

Low Buildup: the SMI® 420F Evaporator is designed with a minimal amount of top surface area to control the build-up of residue or ice, helping to reduce clean up and maintenance!

High Performance: High-speed fan blade rotation creates an optimum water droplet distribution for evaporation. Annual evaporation rates up to 70% have been achieved with the 420F, and averages are typically between 25% and 60%. Evaporation rates depend on many factors, including ambient temperature, relative humidity, water make-up and wind conditions.

Easy Maintenance: The machine is designed for easy cleaning and maintenance. It requires no weekly bearing lubrication, as it is lubricated for the life of the motor.

Minimal Clogging: The SMI® 420F Evaporator can pass particles up to 3/16 inch (4.7 mm) in diameter, which reduces the need for pre-filtering, filter cleaning and the hassles of clogged nozzles.

Extreme Duty: This design has evolved from 10 years of experience in industrial and extreme outdoor applications. Polyethylene pontoons are filled with closed-cell polyurethane foam, ensuring buoyancy even after any accidental puncturing of the plastic outer shell. Critical components are manufactured from stainless steel for extended life in harsh environments.

FEATURES

Floating unit supported by plastic pontoons containing closed-cell PU foam

Low plume height for shorter drift distance, allowing longer operation in swirling or changing winds

Heavy industrial construction, including stainless control panel, motor enclosure, manifold and fan blade, increasing durability and life span

Vibration sensor included to shut down motor before catastrophic failure due to residue or ice build-up

Stainless steel submersible pump attached to floating frame



SMI 420F

EVAPORATOR



Fan



Frame



Pontoon



SPECIFICATIONS

Fan and Head System

- 25 HP industrial grade world motor (for 3 phase / 480 volt / 60 cycle and 3 phase / 400 volt / 50 cycle power; motors for other voltages available upon request)
- Stainless steel casing protects motor and enhances cooling
- Patented stainless steel fan blades (optional scale-resistant coating)
- Vibration sensor for motor shut off

Floating Platform

- Galvanized steel construction with stainless steel fasteners
- Plastic pontoon composed of UV-stabilized polyethylene shell with closed-cell polyurethane foam
- 7.5 HP submersible stainless steel pump for 3 phase / 480 volt / 60 cycle power (specified for 80 gpm (303 lpm) at 100 psi (7 bar))

Water System

- Standard flow, stainless steel water manifold for average evaporation conditions. Designed for flow rate of 66 gpm (250 lpm) at 100 psi (7 bar) water pressure

Electrical

- 25 HP premium efficiency fan motor rotating at 3600 rpm (480 volt / 60 cycle) or 2900 rpm (400 volt / 50 cycle)
- Stainless Steel control panel with start and stop buttons
- 150 foot (45 m) electrical cord

Warranty

- Full one year warranty on all parts and workmanship

Options

- For acidic or high-alkaline water applications, stainless steel construction and acid-resistant coating
- Special scale-resistant coating on fan to reduce residue build-up on blades
- 10 HP submersible stainless steel pump for 3 phase / 400 volt / 50 cycle
- Optional high flow, stainless steel water manifold for above average evaporation. Designed for flow rate of 91 gpm (344 lpm) at 100 psi (7 bar) water pressure
- Y-line manual flush filter for dirtier water



**Evaporative
Solutions**

TECHNOLOGY :: LONGEVITY :: SERVICE

SMI Evaporative Solutions
1512 Rockwell Drive
Midland, MI 48642
Phone: 989-631-6091
Toll-Free: 1-800-248-6600
Fax: 989-631-3162
Website: www.evapor.com



Thermal Fluid Heaters

Vertical Coil, Vertical Tubeless, Electric and Horizontal
Sizes from 75,000 to 40,000,000 BTU/HR

**RUGGED
ROBUST
RELIABLE**



The heat transfer innovators.


THERMAL FLUID FEATURES AND BENEFITS

KEY FEATURES


- No Corrosion or Freezing
- High Operating Temperatures (up to 750°F) with Low System Pressure
- Minimum Maintenance - Burner, Pump and Controls
- Simple Circuit; No Blow-Downs, Steam Traps or Condensate Return Systems
- Fulton's Combination Expansion / Deaerator Thermal Buffer Tank Provides Pipework Simplification, Protection of Thermal Fluid from Oxidation and Continuous Deaeration of Fluid to Avoid Pump Cavitation
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request
- Fulton Heaters are Manufactured Individually for Maximum Flexibility and to Customer Specifications
- Fulton Heaters and Accessory Components (Pumps, Expansion Tanks, Control Valves, etc.) Can Be Skid Mounted to Save Time and On-Site Fabrication

THERMAL FLUID VS. STEAM

A thermal fluid (hot oil) system operates in a closed loop circulation system with minimal pressure. Fulton thermal fluid systems can reach 750°F (345°C) making them an ideal choice for many process heat applications.

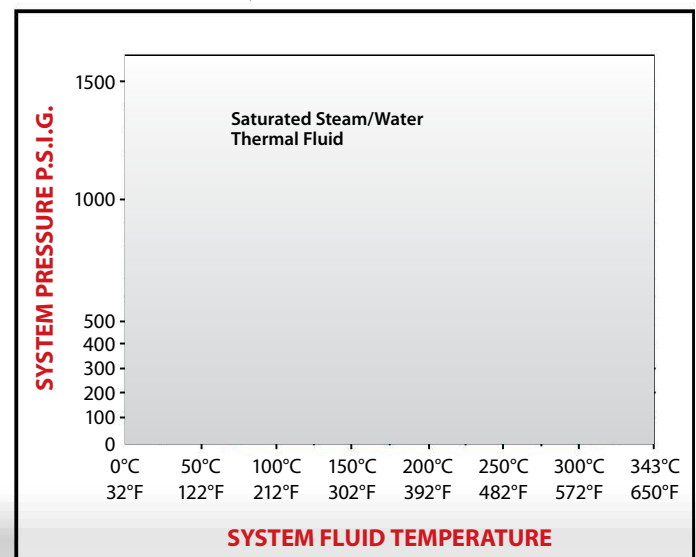

The choice between a steam system or a thermal fluid system is governed by the process requirements. The range or process temperature is a deciding factor. If the system's required temperature is above the freezing point of water (32°F) and below approximately 350°F, the choice is usually steam. However, if the required temperature is below 32°F or above 350°F, thermal fluid may be a better solution.

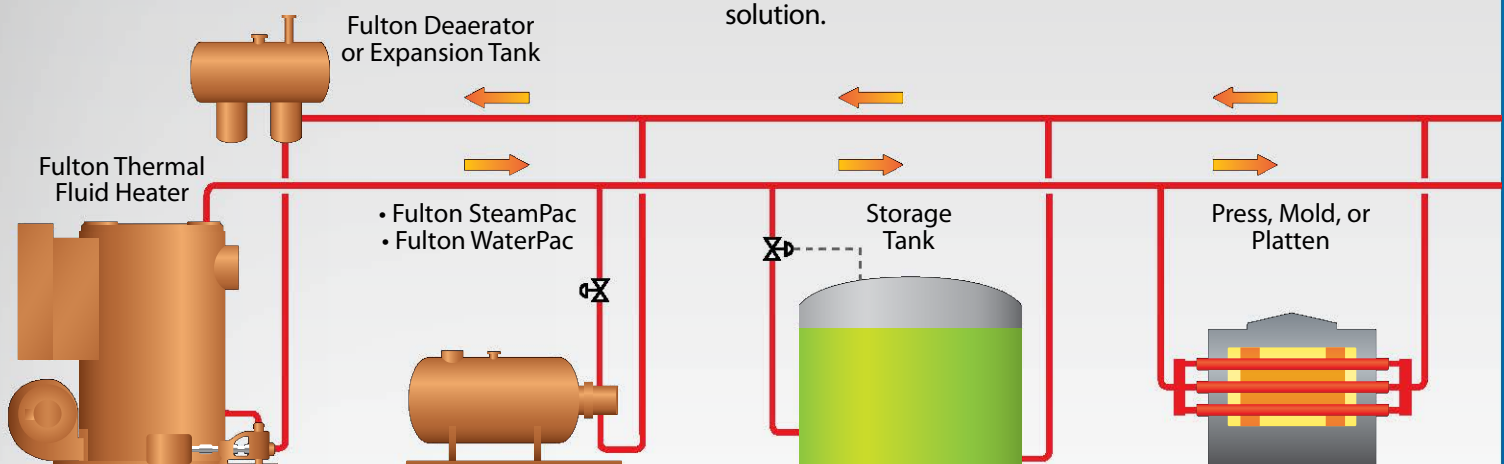


APPLICATIONS



Fulton heaters are used in a variety of applications throughout many industries. Food, plastic and chemical processing, as well as pharmaceutical and bio-fuel production, are only a few examples of the many existing applications using Fulton equipment.




- Adhesives
- Asphalt
- Autoclaves
- Bio-fuel
- Chemical Reactors
- Deodorization
- Distillation
- Food Processing (frying, baking, etc.)
- Gas Processing / Oil Processing
- Inks & Dyes
- Laminating
- Laundry
- Marine Heating and Shipboard Services
- Metal Finishing
- Mining
- Ovens
- Paint and Varnish Manufacture
- Paper Converting Machinery
- Plastics
- Printing and Packaging Machinery
- Rubber and Rubber Compounds
- Surface Pre-Treatment and Finishing
- Tank Farms/Pipe and Pump Tracing
- Textile Machinery
- Unfired Steam or Hot Water Generation
- Uranium Processing
- Waste Treatment/Dryers

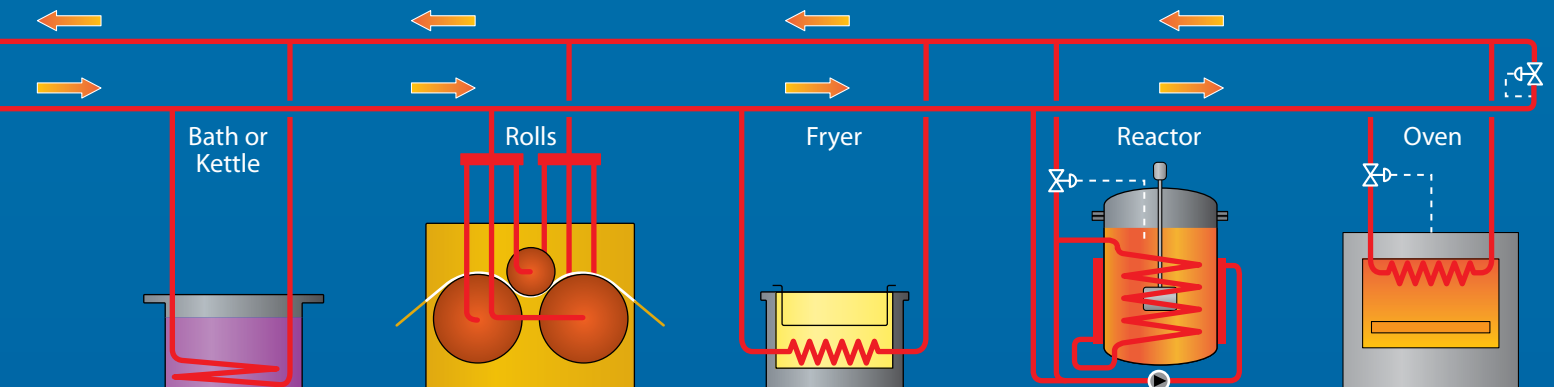

G-MODEL VERTICAL COIL DESIGN

KEY FEATURES

- Vertical 4-Pass Design
- Preheated Combustion Air is an Integral Part of the Design
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request
- 800,000 BTU/Hr to 14,000,000 BTU/Hr Output
- Operating Temperatures to 750°F
- Gas, Oil or Dual Fuel Burners; On/Off or Modulating
- Low Emission Natural Gas Burners are Available
- Minimal Refractory Results in Low Thermal Inertia and Prevents Overheating of the Fluid in the Event of a Pump or Power Failure
- Customized Controls Available
- Customized Heaters Available
- High Efficiencies
- Even Heating

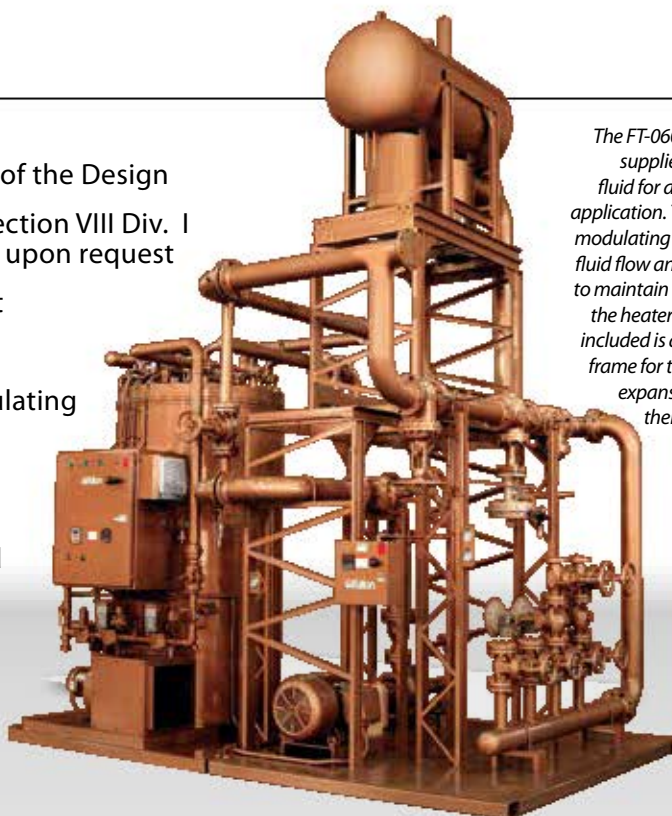

The FT-0600-C shown here supplies 600° F thermal fluid for a food processing application. The skid includes modulating valves to control fluid flow and a bypass valve to maintain flow throughout the heater at all times. Also included is a custom 3-piece frame for the top-mounted expansion / deaerator / thermal buffer tank.



| MODELS | FT-C | 0080 | 0120 | 0160 | 0240 | 0320 | 0400 | 0600 | 0800 | 1000 | 1200 | 1400 |
|-------------------------------|---------------|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|
| Specifications | | | | | | | | | | | | |
| Heat Output | 1,000 BTU/HR | 800 | 1,200 | 1,600 | 2,400 | 3,200 | 4,000 | 6,000 | 8,000 | 10,000 | 12,000 | 14,000 |
| | 1,000 KCAL/HR | 200 | 300 | 400 | 600 | 800 | 1,000 | 1,500 | 2,000 | 2,500 | 3,000 | 3,500 |
| Thermal Fluid Content | Gallons | 10 | 21 | 19 | 31 | 68 | 76 | 132 | 201 | 290 | 383 | 460 |
| | Liters | 38 | 80 | 72 | 116 | 258 | 288 | 498 | 648 | 1,097 | 1,448 | 1,741 |
| Recommended Flow Rate | GPM | 50 | 75 | 100 | 150 | 250 | 250 | 375 | 500 | 615 | 730 | 800 |
| | M3/HR | 11.4 | 17 | 22.7 | 34 | 56.8 | 56.8 | 85.2 | 113.6 | 139 | 167 | 182 |
| Approximate Fuel Usage | | | | | | | | | | | | |
| Light Oil * | GPH | 7.1 | 10.7 | 14.3 | 21.4 | 28 | 35.3 | 53 | 69.3 | 87.1 | 104.5 | 122 |
| | LPH | 27 | 40.6 | 54.1 | 81 | 108.8 | 136 | 201 | 263.7 | 329.6 | 395.5 | 461.5 |
| Natural Gas * | FT3/HR | 998 | 1,498 | 1,998 | 2,999 | 4,000 | 4,997 | 7,498 | 9,997 | 12,496 | 14,998 | 17,500 |
| | M3/HR | 38.3 | 42.4 | 56.5 | 84.9 | 113.2 | 141.5 | 212.3 | 283 | 353.8 | 424.6 | 495.5 |
| Power | | | | | | | | | | | | |
| Typical Circulating Pump | HP | 10 | 10 | 15 | 15 | 20 | 20 | 30 | 40 | 50 | 50 | 60 |
| | KW | 7.5 | 7.5 | 11.2 | 11.2 | 14.9 | 14.9 | 22.5 | 29.5 | 37.3 | 37.3 | 45 |
| Typical Burner Motor | HP | 1.5 | 3 | 3 | 3 | 5 | 7.5 | 7.5 | 15 | 20 | 20 | 20 |
| | KW | 1.1 | 2.2 | 2.2 | 2.2 | 3.7 | 5.6 | 5.6 | 11.2 | 11.2 | 15 | 15 |

* Please consult factory for additional fuel options. Fuel up to No. 6 Oil available for large units (FT-0600-C and larger). Voltage 3 Phase for Burner and Pump - Each unit has an incorporated step down transformer. Efficiency up to 80% Minimum Based on High Heating Value of the Fuel (No. 2 Oil @ 140,000 BTU/GHHV; Natural Gas @ 1,000 BTU/ft3HHV) Circulating pump motor sizes based on standard pressure (55 PSIG) and viscosity 1 cs, specific gravity 0.7, with 25-37 PSID available head for installation. All Units are Modulated. Operating specifications may change based on field conditions.

A LOOK INSIDE

THE COMBUSTION PROCESS

- 1** The combustion air enters the burner fan inlet, travels upward between the inner and outer jacket, preheating the air before it enters the top mounted burner.
- 2** Hot gases travel down the full length of the vessel creating the first (radiant) pass.
- 3** The gases then travel back across the inner row of coils, creating the second (convection) pass.
- 4** The third (convection) pass is created as the gases continue back down between the inner and outer coil.
- 5** The last pass is upward between the outer coil and inner jacket to the flue outlet, creating the fourth (convection) pass.

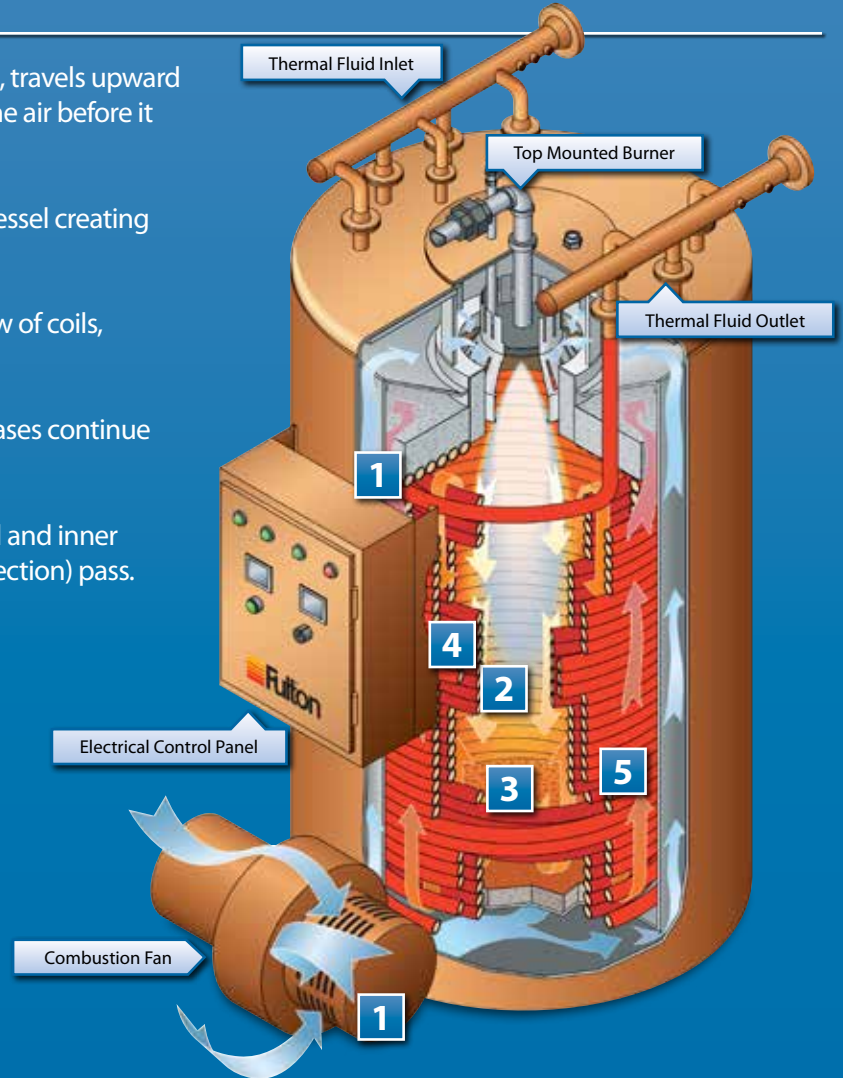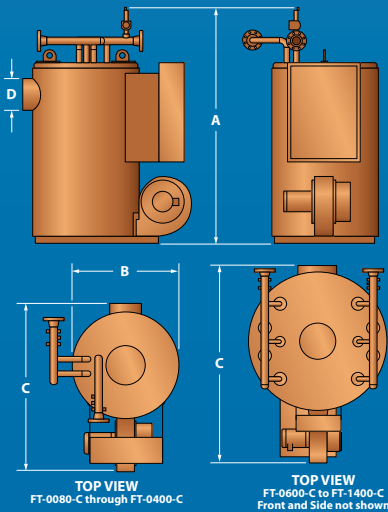

| MODELS | FT-C | 0080 | 0120 | 0160 | 0240 | 0320 | 0400 | 0600 | 0800 | 1000 | 1200 | 1400 |
|---------------------------------|------|-------|-------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
| Dimensions | | | | | | | | | | | | |
| Heater Inlet/Outlet Connections | IN | 1.25 | 1.5 | 2 | 2.5 | 3 | 3 | 4 | 4 | 6 | 6 | 6 |
| | MM | 32 | 38 | 51 | 64 | 76.3 | 76 | 102 | 102 | 152 | 152 | 152 |
| (A) Overall Height | IN | 73.7 | 80.7 | 80.6 | 89.7 | 100.6 | 112.4 | 143.6 | 143 | 146.5 | 146.4 | 163.1 |
| | MM | 1,872 | 2,050 | 2,046 | 2,278 | 2,556 | 2,856 | 3,648 | 3,632 | 3,721 | 3,718 | 4,144 |
| (B) Heater Width | IN | 31.6 | 34.4 | 45.9 | 50.1 | 49.3 | 49.3 | 63.4 | 70.5 | 95 | 108.4 | 108.4 |
| | MM | 803 | 873 | 1,165 | 1,273 | 1,252 | 1,252 | 1,611 | 1,791 | 2,413 | 2,753 | 2,753 |
| (C) Overall Depth | IN | 46.2 | 60.6 | 60.6 | 66.6 | 80.6 | 80.6 | 88.1 | 107.75 | 135.1 | 152.9 | 152.9 |
| | MM | 1,173 | 1,540 | 1,540 | 1,691 | 2,046 | 2,046 | 2,237 | 2,736 | 3,432 | 3,882 | 3,882 |
| (D) Flue Outlet Diameter | IN | 10 | 10 | 10 | 12 | 14 | 14 | 18 | 20 | 20 | 22 | 22 |
| | MM | 254 | 254 | 254 | 305 | 356 | 356 | 457 | 508 | 508 | 559 | 559 |
| Recommended Stack Diameter | IN | 10 | 12 | 12 | 14 | 18 | 18 | 22 | 24 | 24 | 26 | 26 |
| | MM | 254 | 304 | 304 | 356 | 457 | 457 | 558 | 609 | 609 | 661 | 661 |
| Approximate Dry Weight | LB | 1,500 | 2,100 | 2,550 | 3,400 | 5,300 | 5,300 | 8,250 | 11,450 | 19,250 | 21,700 | 23,000 |
| | KG | 700 | 950 | 1,150 | 1,550 | 2,400 | 2,400 | 3,750 | 5,200 | 8,750 | 9,850 | 10,455 |

Specifications and Dimensions are approximate. Consult factory for model specific electrical requirements. We reserve the right to change specifications and/or dimensions without notice. Diagram for guidance purposes only. Comprehensive details of dimensions, connections, etc. for each model are given on product dimension data sheets available from Fulton.

A-MODEL

VERTICAL TUBELESS DESIGN

KEY FEATURES

- Vertical Annular Design
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request
- 207,000 BTU/Hr to 1,736,000 BTU/Hr Output
- Operating Temperatures to 600° F
- Gas or Oil Fired Burners, On/Off or Modulating
- Low Emission Gas Burners are Available
- Customized Controls Available
- Customized Heaters Available





Pictured here is a skid mounted FT-0690-A thermal fluid heater with a deaerator / thermal buffer tank and a circulation pump.

| MODELS | FT-A | 0200 | 0380 | 0520 | 0690 | 1050 | 1740 |
|--------------------------------------|---------------|------|------|------|------|-------|-------|
| Specifications | | | | | | | |
| Heat Output | 1,000 BTU/HR | 207 | 348 | 519 | 693 | 1,052 | 1,736 |
| | 1,000 KCAL/HR | 52 | 88 | 131 | 175 | 265 | 437 |
| Thermal Fluid Content | Gallons | 23 | 38 | 45 | 65 | 98 | 117 |
| | Liters | 87 | 144 | 170 | 246 | 371 | 443 |
| Recommended Flow Rate | GPM | 90 | 90 | 125 | 125 | 150 | 200 |
| | M3/HR | 21 | 21 | 28 | 28 | 34 | 46 |
| Approximate Fuel Usage • Light Oil | GPH | 2.2 | 3.2 | 4.7 | 6.7 | 9.4 | 15.8 |
| | LPH | 8.3 | 11.9 | 17.8 | 25.4 | 35.6 | 60 |
| Approximate Fuel Usage • Natural Gas | FT3/HR | 259 | 435 | 649 | 866 | 1,315 | 2,170 |
| | M3/HR | 7.2 | 12.2 | 18.4 | 24.2 | 36.8 | 60.8 |
| Power | | | | | | | |
| Typical Circulating Pump | HP | 10 | 10 | 15 | 15 | 15 | 20 |
| | KW | 7.5 | 7.5 | 11.2 | 11.2 | 11.2 | 14.9 |
| Typical Burner Motor | HP | .33 | .33 | .33 | .75 | .75 | 1.5 |
| | KW | .248 | .248 | .248 | .56 | .56 | 1.1 |

A LOOK INSIDE

THE COMBUSTION PROCESS

- 1** The top-mounted down-fired burner delivers a spinning flame down the length of the furnace. As the flame swirls downward in a controlled flow pattern, the fluid spirals upward in the pressure vessel.
- 2** Hot gases from the flame are carried up the outside of the vessel in the secondary flue passage convection area.
- 3** Convection fins welded along the full length of the vessel transmit the remaining heat through the outer side of the fluid vessel and into the fluid. The result is even heating of thermal fluids for optimum thermal efficiency.

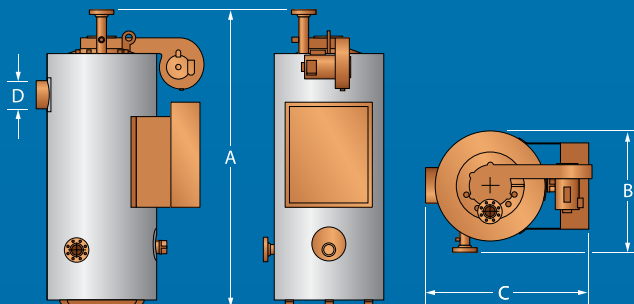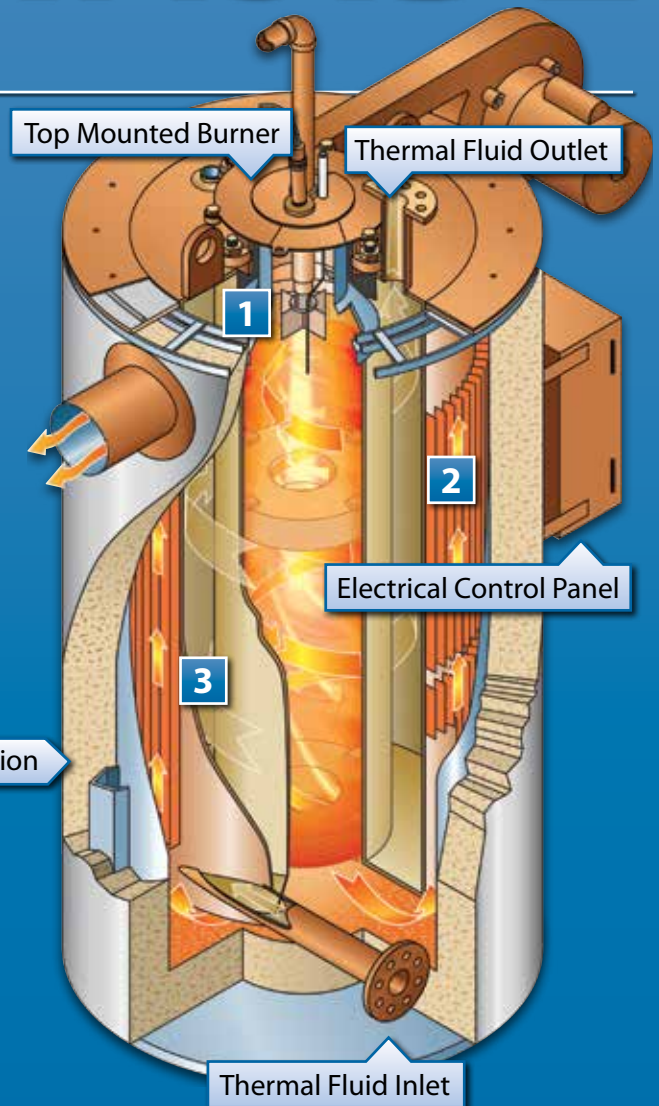

Specifications and Dimensions are approximate. Consult factory for model specific electrical requirements. We reserve the right to change specifications and/or dimensions without notice.

Diagram for guidance purposes only. Comprehensive details of dimensions, connections, etc. for each model are given on product dimension data sheets available from Fulton.

| MODELS | FT-A | 0200 | 0380 | 0520 | 0690 | 1050 | 1740 |
|---------------------------------|------|-------|-------|-------|-------|-------|-------|
| Dimensions | | | | | | | |
| Heater Inlet/Outlet Connections | IN | 1.5 | 1.5 | 2 | 2 | 2 | 2.5 |
| | MM | 38 | 38 | 51 | 51 | 51 | 64 |
| (A) Overall Height | IN | 69 | 75 | 85 | 86 | 86 | 110 |
| | MM | 1,752 | 1,905 | 2,159 | 2,185 | 2,185 | 2,794 |
| (B) Heater Width | IN | 26 | 28 | 30 | 36 | 44 | 44 |
| | MM | 660 | 710 | 760 | 915 | 1,120 | 1,120 |
| (C) Overall Depth | IN | 43 | 45.5 | 46 | 56 | 64 | 64 |
| | MM | 1,092 | 1,156 | 1,168 | 1,422 | 1,626 | 1,626 |
| (D) Flue Outlet Diameter | IN | 6 | 6 | 8 | 10 | 12 | 12 |
| | MM | 152 | 152 | 203 | 254 | 305 | 305 |
| Approximate Dry Weight | LB | 1,850 | 2,100 | 2,300 | 3,400 | 4,400 | 7,200 |
| | KG | 840 | 955 | 1,045 | 1,540 | 1,995 | 3,275 |

N-MODEL

VERTICAL ELECTRIC DESIGN

KEY FEATURES

- Compact Vertical Design
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request
- 74,000 BTU/Hr to 1,685,000 BTU/Hr Output
- Operating Temperatures to 650° F
- Low Watt Density Elements Result in Low Film Temperatures and Long Element Life
- Customized Controls Available, Including (but not limited to) Class 1, Division 1 or 2 groups C&D of NEC Code
- Customized Heaters Available



Pictured here is a skid mounted FT-0640-N electric thermal fluid heater with an expansion / deaerator / thermal buffer tank and a circulation pump.

| MODELS | FT-N | 0075 | 0150 | 0225 | 0300 | 0375 | 0430 | 0640 | 0860 | 1070 | 1290 | 1500 | 1720 |
|--------------------------------|---------------|------|------|------|------|------|-------|------|-------|-------|-------|-------|-------|
| Specifications | | | | | | | | | | | | | |
| | KW | 22 | 44 | 66 | 88 | 110 | 126 | 189 | 252 | 315 | 378 | 441 | 504 |
| Heat Input | 1,000 BTU/HR | 75 | 150 | 225 | 300 | 375 | 429 | 644 | 859 | 1,074 | 1,289 | 1,504 | 1,719 |
| | 1,000 KCAL/HR | 18.9 | 37.8 | 56.7 | 75.6 | 94.5 | 108 | 162 | 216 | 271 | 325 | 379 | 433 |
| Heat Output | 1,000 BTU/HR | 74 | 148 | 222 | 294 | 368 | 420 | 631 | 842 | 1,053 | 1,263 | 1,474 | 1,685 |
| | 1,000 KCAL/HR | 18.6 | 37.3 | 59.9 | 74.1 | 92.7 | 105.8 | 159 | 212.2 | 265.4 | 318.3 | 371.4 | 424.6 |
| Thermal Fluid Content | Gallons | 18 | 36 | 42 | 54 | 63 | 79 | 79 | 102 | 127 | 152 | 168 | 185 |
| | Liters | 68 | 136 | 159 | 204 | 238 | 299 | 299 | 386 | 480 | 575 | 636 | 700 |
| Recommended Flow Rate | GPM | 50 | 50 | 50 | 90 | 90 | 125 | 125 | 150 | 150 | 175 | 200 | 200 |
| | M3/HR | 11.4 | 11.4 | 11.4 | 20.5 | 20.5 | 28.4 | 28.4 | 34 | 34 | 39.8 | 45.5 | 45.5 |
| Power | | | | | | | | | | | | | |
| Typical Circulating Pump Motor | HP | 7.5 | 7.5 | 7.5 | 10 | 10 | 15 | 15 | 15 | 15 | 15 | 20 | 20 |
| | KW | 5.6 | 5.6 | 5.6 | 7.5 | 7.5 | 11.2 | 11.2 | 11.2 | 11.2 | 11.2 | 14.9 | 14.9 |
| Amps | 208V | 61 | 122 | 183 | 245 | 306 | 350 | 525 | 700 | 875 | 1,050 | 1,224 | 1,399 |
| | 220V | 53 | 106 | 159 | 212 | 265 | 303 | 455 | 607 | 758 | 910 | 1,061 | 1,212 |
| | 480V | 26 | 53 | 79 | 106 | 132 | 151 | 228 | 303 | 379 | 455 | 531 | 606 |



A LOOK INSIDE

OPERATING PRINCIPLE

1 Thermal fluid enters the heater from the lower right side. This unique circulation method (upward spiraling fluid) results in an even flow of thermal fluid within the vessel.

2 The thermal fluid flows evenly across the multiple low watt density elements, uniformly heating the thermal fluid. This results in low film temperatures and assures long element life.

3 Fulton electric thermal fluid heaters are nearly 100% efficient because the elements are totally immersed in thermal fluid and the jacket is fully insulated with high density insulation.

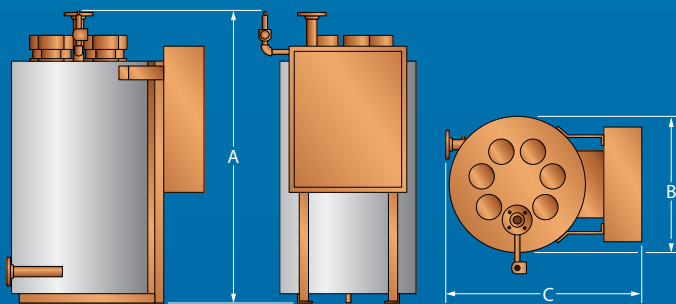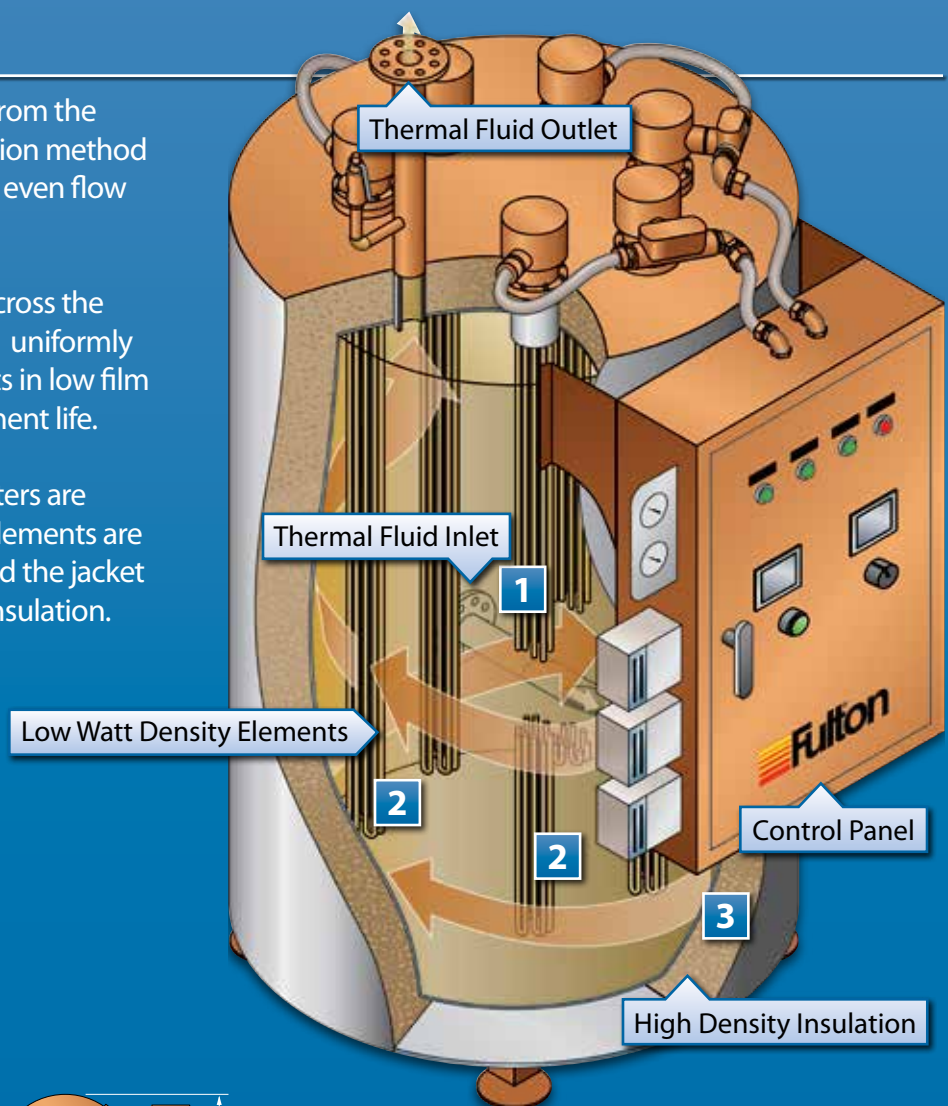

Specifications and Dimensions are approximate. Consult factory for model specific electrical requirements. We reserve the right to change specifications and/or dimensions without notice.

Diagram for guidance purposes only. Comprehensive details of dimensions, connections, etc. for each model are given on product dimension data sheets available from Fulton.

| MODELS | FT-N | 0075 | 0150 | 0225 | 0300 | 0375 | 0430 | 0640 | 0860 | 1070 | 1290 | 1500 | 1720 |
|------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Dimensions | | | | | | | | | | | | | |
| Heater Inlet | IN | 1.5 | 1.5 | 1.5 | 1.5 | 1.5 | 2 | 2 | 2 | 2 | 2 | 2.5 | 2.5 |
| | MM | 38 | 38 | 38 | 38 | 38 | 51 | 51 | 51 | 51 | 51 | 64 | 64 |
| (A) Overall Height | IN | 70 | 70 | 70.5 | 70 | 70 | 90.5 | 90.4 | 90.8 | 89.8 | 91.2 | 93 | 93 |
| | MM | 1,778 | 1,778 | 1,791 | 1,778 | 1,778 | 2,299 | 2,296 | 2,306 | 2,281 | 2,317 | 2,362 | 2,362 |
| (B) Heater Width | IN | 20 | 26 | 28 | 32 | 32 | 32 | 32 | 38 | 44 | 50 | 54 | 58 |
| | MM | 508 | 660 | 711 | 813 | 813 | 813 | 813 | 965 | 1,118 | 1,270 | 1,372 | 1,473 |
| (C) Overall Depth | IN | 37.5 | 43 | 43.5 | 47.5 | 47.5 | 47.5 | 49.5 | 53.8 | 58.4 | 65.7 | 71.8 | 75.7 |
| | MM | 953 | 1,092 | 1,105 | 1,207 | 1,207 | 1,207 | 1,257 | 1,365 | 1,257 | 1,669 | 1,823 | 1,993 |
| Approximate Dry Weight | LB | 1,060 | 1,220 | 1,400 | 1,540 | 1,660 | 2,040 | 2,200 | 2,370 | 2,650 | 2,950 | 2,950 | 3,600 |
| | KG | 481 | 555 | 636 | 700 | 756 | 927 | 1,000 | 1,077 | 1,205 | 1,341 | 1,341 | 1,636 |

HOPKINS

HORIZONTAL COIL DESIGN


KEY FEATURES

- Horizontal 2-Pass Design
- 1,000,000 BTU/Hr to 40,000,000 BTU/Hr Output
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request
- Operating Temperatures to 650° F
- Modulating Gas, Oil or Dual Fuel Burners
- Alternative Fuel Capabilities
- Open Protocol Burner
- Skid-Mounted Systems Available, Including Circulating Pump and Expansion Tank
- Customized Controls and Coil Designs Available
- Water - Glycol Heaters Available
- Available With or Without Integral Expansion Tank




| MODELS | HPN | 100S | 200S | 350S | 600S | 800S | 1000S | 1200S | 1400S | 1600S | 2000S | 2400S | 3000S | 4000S |
|------------------------------------|-----------------|-------|-------|-------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Specifications | | | | | | | | | | | | | | |
| Heat Output | Million BTU/hr | 1 | 2 | 3.5 | 6 | 8 | 10 | 12 | 14 | 16 | 20 | 24 | 30 | 40 |
| | Million Kcal/hr | .25 | .5 | .875 | 1.5 | 2 | 2.5 | 3 | 3.5 | 4 | 5 | 6 | 7.5 | 10 |
| Flow Rate-Standard *1 | GPM | 75 | 150 | 265 | 425 | 600 | 725 | 900 | 1050 | 1200 | 1500 | 1800 | 2250 | 3000 |
| | M3/min | 18 | 35 | 61 | 97 | 137 | 165 | 205 | 239 | 273 | 341 | 409 | 511 | 682 |
| Flow Rate-Low Flow *2 | GPM | 40 | 75 | 135 | 225 | 300 | 375 | 450 | 525 | 600 | 750 | 900 | 1125 | 1500 |
| | M3/min | 10 | 18 | 31 | 52 | 69 | 86 | 103 | 120 | 97 | 171 | 205 | 256 | 341 |
| Circulating Pump Motor-STD | HP | 7.5 | 15 | 20 | 30 | 40 | 50 | 60 | 75 | 100 | 100 | 125 | 150 | 200 |
| | kW | 5.6 | 11.2 | 14.9 | 22.5 | 29.8 | 37.3 | 45 | 56 | 74.5 | 74.5 | 93.2 | 111.8 | 149 |
| Circulating Pump Motor-LF | HP | 7.5 | 7.5 | 15 | 20 | 30 | 30 | 40 | 30 | 40 | 50 | 60 | 75 | 100 |
| | kW | 5.6 | 5.6 | 11.2 | 14.9 | 22.5 | 22.5 | 29.8 | 22.5 | 29.8 | 37.3 | 45 | 56 | 74.5 |
| Blower Motor | HP | 1/3 | 1 | 2 | 7.5 | 10 | 10 | 5 | 7.5 | 7.5 | 15 | 20 | 25 | 30 |
| | kW | .25 | .7 | 1.5 | 5.6 | 7.5 | 7.5 | 4.3 | 5.6 | 5.6 | 11.2 | 14.9 | 18.6 | 22.5 |
| Light Oil (approx. fuel usage)*3 | GPH | 8.8 | 17.5 | 30.6 | 52.5 | 70 | 87.5 | 104.9 | 122.4 | 139.9 | 174.9 | 209.8 | 262.3 | 349.7 |
| | LPH | 33.3 | 66.2 | 115.8 | 198.7 | 265 | 331.2 | 397 | 463.3 | 529.5 | 662 | 794 | 992.8 | 1324 |
| Natural Gas (approx. fuel usage)*3 | FT3/hr | 1,334 | 2,667 | 4,667 | 8,000 | 10,667 | 13,334 | 16,000 | 18,667 | 21,334 | 26,667 | 32,000 | 40,000 | 53,334 |
| | M3/hr | 37.4 | 75 | 131 | 224 | 299 | 373.4 | 448 | 522.7 | 597.4 | 747 | 896 | 1120 | 1493.4 |

A LOOK INSIDE

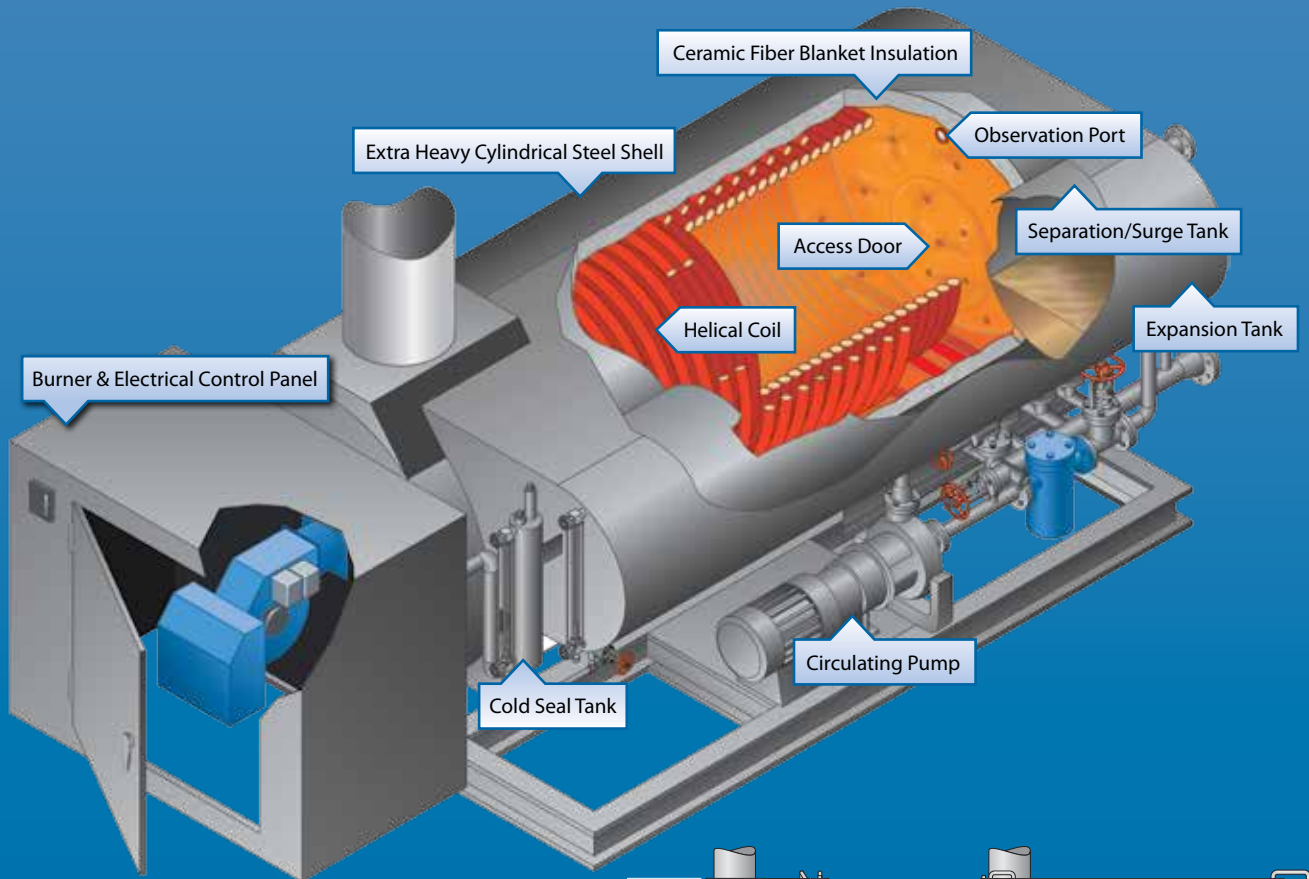

Specifications and Dimensions are approximate. Consult factory for model specific electrical requirements. We reserve the right to change specifications and/or dimensions without notice.

Diagram for guidance purposes only. Comprehensive details of dimensions, connections, etc. for each model are given on product dimension data sheets available from Fulton.

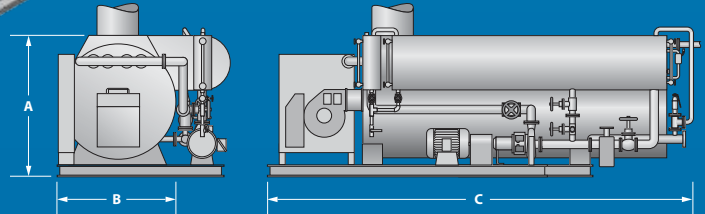

***NOTE:** Dimensions shown are for the Hopkins model without the integral expansion tank.

| MODELS | HPN | 100S | 200S | 350S | 600S | 800S | 1000S | 1200S | 1400S | 1600S | 2000S | 2400S | 3000S | 4000S |
|--------------------------------|--------------------|---------|-------|--------|--------|--------|--------|--------|---------|---------|--------|--------|---------|---------|
| Dimensions | | | | | | | | | | | | | | |
| (A) Overall Height (w/o Stack) | IN | 51 | 60 | 62 | 82 | 82 | 105 | 105 | 106 | 106 | 125 | 133 | 133 | 142 |
| | MM | 1,295.4 | 1,524 | 1,575 | 2,083 | 2,083 | 2,667 | 2,667 | 2,692.4 | 2,692.4 | 3,175 | 3,378 | 3,378 | 3,607 |
| (B) Overall Width | IN | 42 | 50 | 50 | 74 | 93 | 87 | 103 | 110 | 110 | 123 | 130 | 130 | 142 |
| | MM | 1,067 | 1,270 | 1,270 | 1,880 | 2,362 | 2,210 | 2,617 | 2,794 | 2,794 | 3,124 | 3,302 | 3,302 | 3,607 |
| (C) Overall Length | IN | 115 | 152 | 211 | 231 | 302 | 311 | 360 | 408 | 444 | 450 | 550 | 575 | 648 |
| | MM | 2,921 | 3,861 | 5,359 | 5,867 | 7,671 | 7,899 | 9,144 | 10,363 | 11,278 | 11,430 | 13,970 | 14,605 | 16,459 |
| Inlet/Outlet Connections | IN | 2 | 3 | 3 | 4 | 6 | 6 | 8 | 8 | 8 | 10 | 12 | 12 | 12 |
| | MM | 51 | 76.2 | 76.2 | 102 | 152.4 | 152.4 | 203 | 203 | 203 | 254 | 305 | 305 | 305 |
| Thermal Liquid Volume | Gallons | 45 | 86 | 168 | 426 | 661 | 724 | 853 | 1,168 | 1,400 | 1,721 | 2,322 | 3,180 | 4,626 |
| | Liters | 170 | 325 | 635 | 1,612 | 2,502 | 2,740 | 3,228 | 4,421 | 5,299 | 6,514 | 8,789 | 12,037 | 17,511 |
| Approx. Dry Weight | LB | 3,936 | 6,800 | 9,052 | 14,350 | 18,500 | 23,100 | 26,800 | 30,500 | 32,600 | 41,400 | 68,000 | 74,000 | 80,000 |
| | KG | 1,785 | 3,084 | 4,106 | 6,509 | 8,392 | 10,478 | 12,156 | 13,835 | 14,787 | 18,779 | 30,844 | 33,566 | 36,287 |
| Approx. Flooded Weight | LB | 4,310 | 7,514 | 10,447 | 17,886 | 23,987 | 29,110 | 33,880 | 40,195 | 44,220 | 55,685 | 87,273 | 100,394 | 118,396 |
| | KG | 1,955 | 3,408 | 4,739 | 8,113 | 10,880 | 13,204 | 15,368 | 18,232 | 20,058 | 25,258 | 39,586 | 45,538 | 53,704 |
| Floor Loading | LB/FT ³ | 129 | 143 | 143 | 151 | 123 | 155 | 132 | 129 | 131 | 145 | 176 | 194 | 186 |
| | KG/M ³ | 2,066 | 2,291 | 2,291 | 2,419 | 1,970 | 2,483 | 2,115 | 2,066 | 2,099 | 2,323 | 2,819 | 3,108 | 2,980 |

ALLIANCE

HORIZONTAL COIL DESIGN

KEY FEATURES

- Compact Horizontal 3-Pass Design
- 2,400,000 BTU/Hr to 20,000,000 BTU/Hr Output
- Heaters are Built and Tested to ASME Code Section VIII Div. I as standard. ASME Code Section I is available upon request.
- Operating Temperatures to 650° F
- Modulating Gas, Oil or Dual Fuel Burners
- Low Emission Gas Burners
- Alternative Fuel Capabilities
- Open Protocol Burner
- Skid Mounted Systems Available, Including Circulating Pump and Expansion Tank
- Customized Controls and Heaters Available



Shown here is an FT-0600-HC horizontal heater skid mounted with circulation pump and a combination expansion / deaerator / thermal buffer tank, designed for barge cargo heating.

| MODELS | HC | 0240 | 0400 | 0600 | 0800 | 1000 | 1200 | 1600 | 2000 |
|--------------------------------|---------------|-------|-------|-------|--------|--------|--------|--------|--------|
| Specifications | | | | | | | | | |
| Heat Output | 1,000 BTU/HR | 2,400 | 4,000 | 6,000 | 8,000 | 10,000 | 12,000 | 16,000 | 20,000 |
| | 1,000 KCAL/HR | 600 | 1,000 | 1,500 | 2,000 | 2,500 | 3,000 | 4,032 | 5,040 |
| Thermal Fluid Content | Gallons | 75 | 115 | 190 | 264 | 325 | 508 | 480 | 1,150 |
| | Liters | 284 | 435 | 719 | 998 | 1,230 | 1,921 | 1,817 | 4,353 |
| Recommended Flow Rate | GPM | 150 | 300 | 400 | 600 | 850 | 1,200 | 1,200 | 1,500 |
| | M3/HR | 35 | 69 | 91 | 137 | 193 | 273 | 273 | 341 |
| Approximate Fuel Usage | | | | | | | | | |
| Light Oil | GPH | 23 | 39 | 58 | 77 | 96 | 115 | 143 | 179 |
| | LPH | 88 | 148 | 220 | 292 | 364 | 436 | 542 | 678 |
| Natural Gas | FT3/HR | 3,200 | 5,340 | 8,000 | 10,700 | 13,340 | 16,000 | 20,000 | 25,000 |
| | M3/HR | 91 | 152 | 227 | 304 | 378 | 454 | 566 | 708 |
| Power | | | | | | | | | |
| Typical Circulating Pump Motor | HP | 15 | 25 | 30 | 50 | 60 | 75 | 100 | 125 |
| | KW | 11.2 | 18.7 | 22.5 | 37.3 | 45 | 56 | 74.5 | 93.2 |
| Typical Burner Motor | HP | 2 | 5 | 7.5 | 10 | 15 | 15 | 30 | 30 |
| | KW | 1.5 | 3.7 | 5.6 | 7.5 | 11.2 | 11.2 | 22.4 | 22.4 |




A LOOK INSIDE

THE COMBUSTION PROCESS

1 Air and fuel mix in the open protocol burner located at the front of the heater. The burner fires down the center of the vessel forming the first pass.

2 The hot gases turn at the rear of the vessel and return between two rolls of coils to the front end plate forming the second pass.

3 The hot gases then flow along the outside of the coils to the back of the heater, forming the third pass and then exit out the flue.

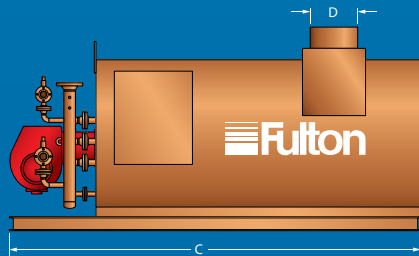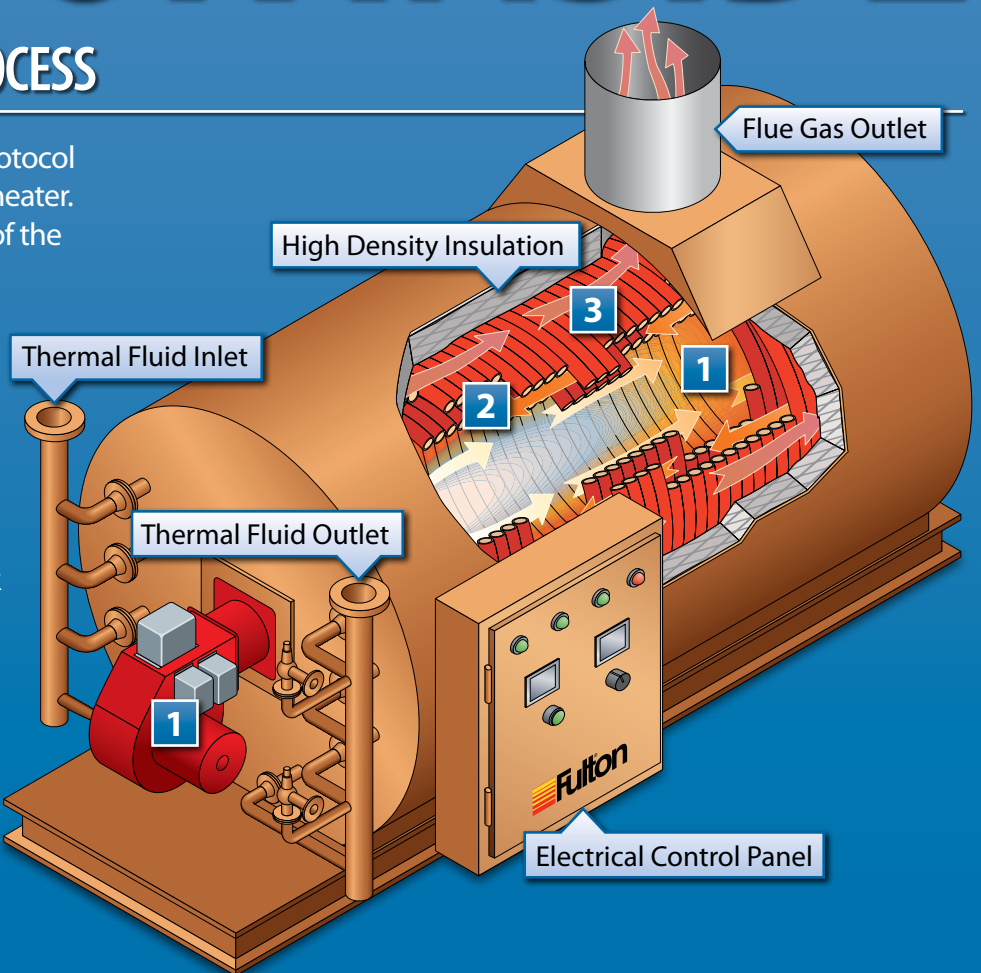

Specifications and Dimensions are approximate. Consult factory for model specific electrical requirements. We reserve the right to change specifications and/or dimensions without notice.

Diagram for guidance purposes only. Comprehensive details of dimensions, connections, etc. for each model are given on product dimension data sheets available from Fulton.

| MODELS | HC | 0240 | 0400 | 0600 | 0800 | 1000 | 1200 | 1600 | 2000 |
|---------------------------------|----|-------|-------|-------|--------|--------|--------|--------|--------|
| Dimensions | | | | | | | | | |
| Heater Inlet/Outlet Connections | IN | 2.5 | 3 | 4 | 6 | 6 | 6 | 8 | 8 |
| | MM | 64 | 76 | 102 | 152 | 152 | 152 | 203 | 203 |
| (A) Overall Height | IN | 64 | 68 | 78 | 107 | 107 | 131 | 114 | 118 |
| | MM | 1,626 | 1,727 | 1,981 | 2,718 | 2,718 | 3,327 | 2,896 | 2,997 |
| (B) Heater Width | IN | 62 | 62 | 81 | 95 | 95 | 130 | 118.5 | 119.5 |
| | MM | 1,575 | 1,575 | 2,057 | 2,413 | 2,413 | 3,302 | 3,010 | 3,035 |
| (C) Overall Depth | IN | 134 | 137 | 157 | 208 | 182 | 240 | 327 | 351 |
| | MM | 3,404 | 3,480 | 3,988 | 4,623 | 4,623 | 6,096 | 8,306 | 8,915 |
| (D) Flue Outlet Diameter | IN | 12 | 14 | 18 | 22 | 22 | 22 | 36 | 36 |
| | MM | 305 | 356 | 457 | 559 | 559 | 559 | 914 | 914 |
| Approximate Dry Weight | LB | 5,000 | 7,500 | 9,500 | 12,500 | 19,250 | 21,700 | 39,000 | 39,000 |
| | KG | 2,272 | 3,409 | 5,455 | 5,682 | 8,750 | 9,864 | 17,728 | 17,728 |

UNFIRED STEAM AND HOT WATER GENERATORS

STEAM GENERATOR KEY FEATURES

- Vertical Design 10 HP to 100 HP
- Horizontal Design 70 HP to 415 HP (Custom sizes are available)
- Standard Designs 15 PSIG to 150 PSIG (custom operating pressures are available)
- Built and Stamped to ASME Code Section VIII Div. I
- Complete with Modulating Thermal Fluid Control Valve and Custom Control Panel
- May be Skid Mounted with Blowdown Separators, Return Tanks, Deaerator Tanks, Feedwater Pumps, Chemical Tanks and Water Softeners



HOT WATER GENERATOR KEY FEATURES


- Custom Designs Available
- Carbon Steel or Stainless Steel
- Built and Stamped to ASME Code Section VIII Div. I
- Complete with Modulating Thermal Fluid Control Valve
- Instantaneous Hot Water Generation, or Can Be Used with a Storage Tank



EXPANSION/DEAERATOR/THERMAL BUFFER TANK

KEY FEATURES

- Designed to Work as an Open-Atmospheric System Where Applicable, Eliminating the Expense of an Inert Gas Blanket
- Continuous Deaeration of Steam and Other Non-Condensibles
- Protects Fluid from Oxidation
- Simplification of Pipework
- Ease of Installation
- Standard 2-Pipe Expansion Tanks also Available

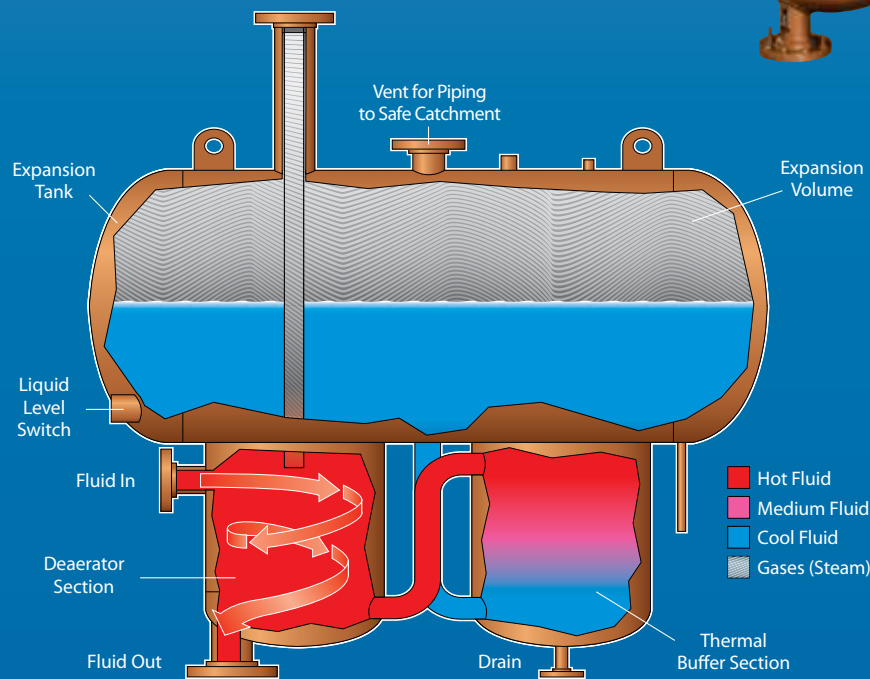

| MODELS | FT-L | 0200 | 0500 | 1000 | 1500 | 2000 | 3000 | 5000 |
|----------------------------|---------|------|-------|-------|-------|-------|-------|--------|
| Tank Sizing and Capacities | | | | | | | | |
| Capacity | Gallons | 52 | 132 | 264 | 397 | 528 | 793 | 1,310 |
| | Liters | 196 | 499 | 999 | 1,502 | 1,998 | 3,001 | 4,958 |
| Initial Fill | Gallons | 25 | 40 | 80 | 90 | 145 | 215 | 300 |
| | Liters | 94 | 151 | 302 | 340 | 548 | 813 | 1,135 |
| Available for Expansion | Gallons | 46 | 121 | 232 | 380 | 444 | 717 | 1,168 |
| | Liters | 174 | 458 | 878 | 1,438 | 1,680 | 2,714 | 4,421 |
| Max System Volume | Gallons | 184 | 525 | 1,000 | 1,400 | 1,700 | 2,600 | 4,600 |
| | Liters | 696 | 1,987 | 3,785 | 5,299 | 6,435 | 9,842 | 17,412 |
| Dry Weight | LB | 636 | 970 | 1,350 | 1,710 | 2,550 | 3,200 | 5,300 |
| | KG | 289 | 440 | 612 | 776 | 1,134 | 1,451 | 1,637 |

CUSTOM ENGINEERED SKIDDED SYSTEMS


Fulton's engineering and design capabilities are unmatched in the industry, providing comprehensive solutions to custom-designed thermal fluid systems. Our team of engineers and project managers assist in the specification and design of a "turnkey" system for each application. All engineered systems come with state-of-the-art operating controls and can have single-point electric, fuel supply, thermal fluid drain/fill, inlet/outlet, and any other applicable connection. From design to complete fabrication, trust Fulton and our many years of experience to build a system you can rely on for years to come.



The skid system shown here included one FT-0240-C heater, a circulating pump, expansion tank and a temperature control unit (TCU). This system was designed to provide thermal fluid and hot water to several dryers for a wastewater application.



This system includes two FT-0600-C thermal fluid heaters skid mounted with three circulating pumps (one pump acts as a backup for either heater), and one FT-5000-L expansion tank (not shown). These heaters are used to provide process heat for the manufacture of asphalt roofing shingles.

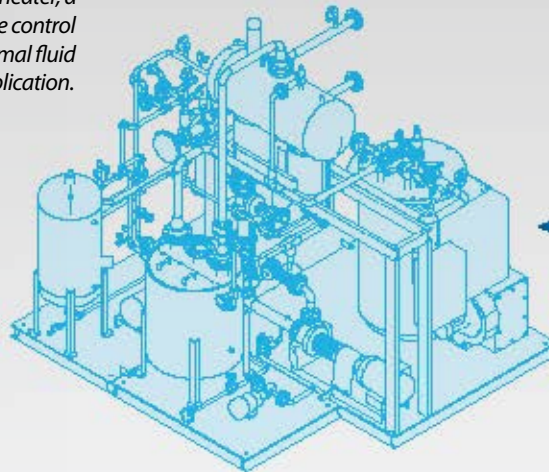

Custom 3-D models are created for all engineered systems



Fulton

The heat transfer innovators.

Fulton Thermal Corporation
972 Centerville Road, Pulaski, NY 13142
Call: (315) 298-5121 • Fax: (315) 298-6390



www.fulton.com


FTC-BRO_2013-1218



Clarification Separator

A HIGH-EFFICIENCY OIL WATER SEPARATOR

- Reduces coalescing media failure
- Reduces pretreatment needs
- Reduces posttreatment needs
- Lowers total cost of ownership

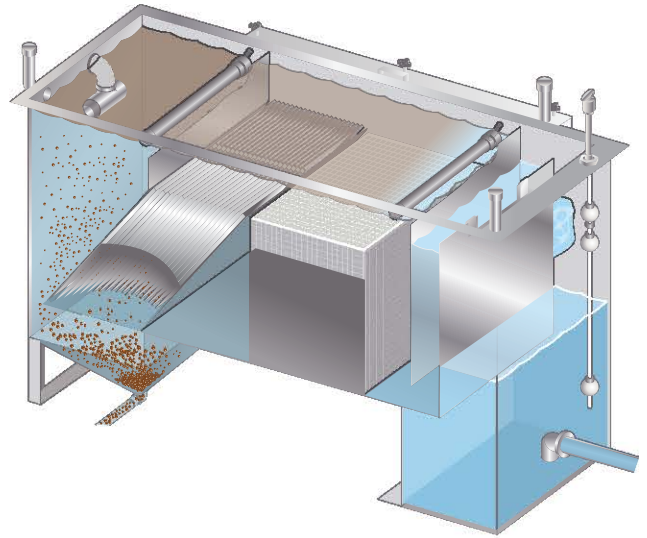

HQI Clarification Separator is recommended for any application that has oil and a high concentration of settleable and suspended solids.

DESIGN

The HQI Clarification Separator is a horizontal gravity flow pretreatment solution designed to separate settleable solids (specific gravity greater than water), suspended solids (specific gravity the same as water), and free and dispersed (non-emulsified) oil.

Units are built out of stainless steel or carbon steel. We offer several coating solutions for your specific application, such as brine water or frac water.

For a full list of options, such as pump packages and control panels, see: www.hydroquipinc.com/HQI-CS

Our Clarification Separator, when used in conjunction with

posttreatment filtration, such as reverse osmosis (RO), dissolved air flotation (DAF) or electrocoagulation (EC), treats wastewater so it can be recycled or discharged.

This unit lowers the total cost of ownership of the entire water treatment system by:

- preventing large amounts of solids from entering coalescing chamber, reducing coalescing media failure.
- eliminating need of inefficient settling basins or frac tanks prior to treatment process.
- decreasing amount of carry-over entering into posttreatment process.


OIL & GAS APPLICATIONS

- Onshore and Offshore Drilling Operations
- Oil Refineries
- Flowback Water from Hydraulic Fracturing
- Produced Water
- Waste Oil Processing Facilities
- Frac Water


OTHER APPLICATIONS

- Washing Applications
- Industrial Applications

5 STAGES OF SEPARATION

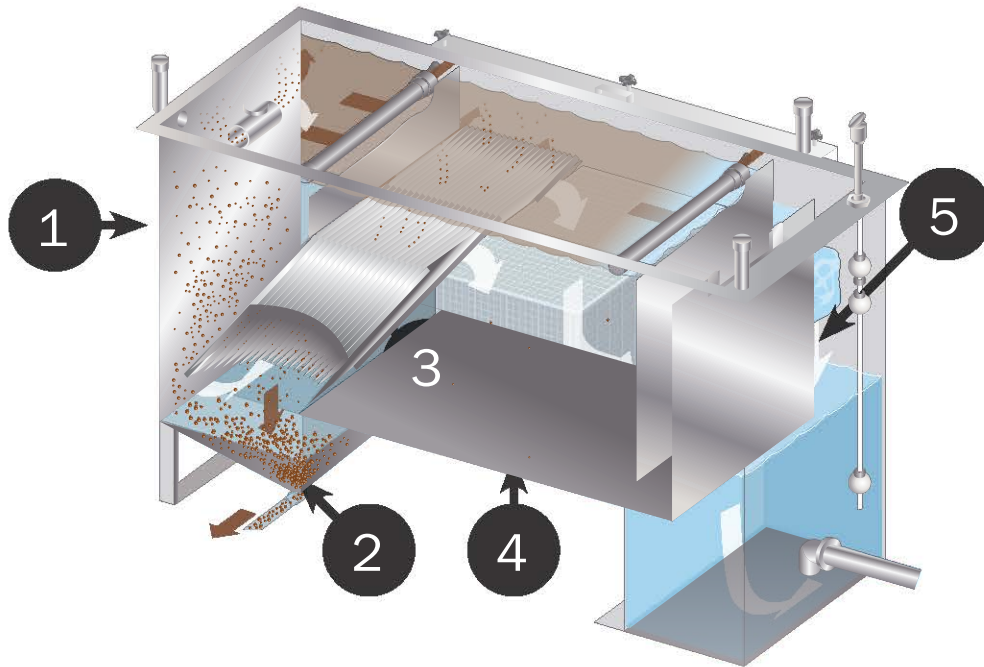

1. The **free oil** (150 micron in size or greater) is separated in the inlet quiescent zone. (Pipe skimmer provided to decant oil.)
2. The **settleable solids** will flow downward into the hopper section for removal.
3. The **suspended solids** and dispersed oil will flow upward through the inclined plates section, where most of the suspended solids will slide down the plates into the hopper (based on a design of .25 gpm per square foot of projected plate surface area).
4. The **remaining suspended solids** and **dispersed oil** will flow into the separation compartment where the coalescing plates will separate the oil 30 micron or greater to the surface for removal and the remaining suspended solids will be captured in the coalescing plates. The amount of solids in the plates will determine the frequency of plate cleaning. (Pipe skimmer for removal of separated oil.)
5. The flow of water will go over the overflow weir plate into the **clean water** compartment where absorption bags will prevent any carryover from being discharged. (Optional float switch shown.)

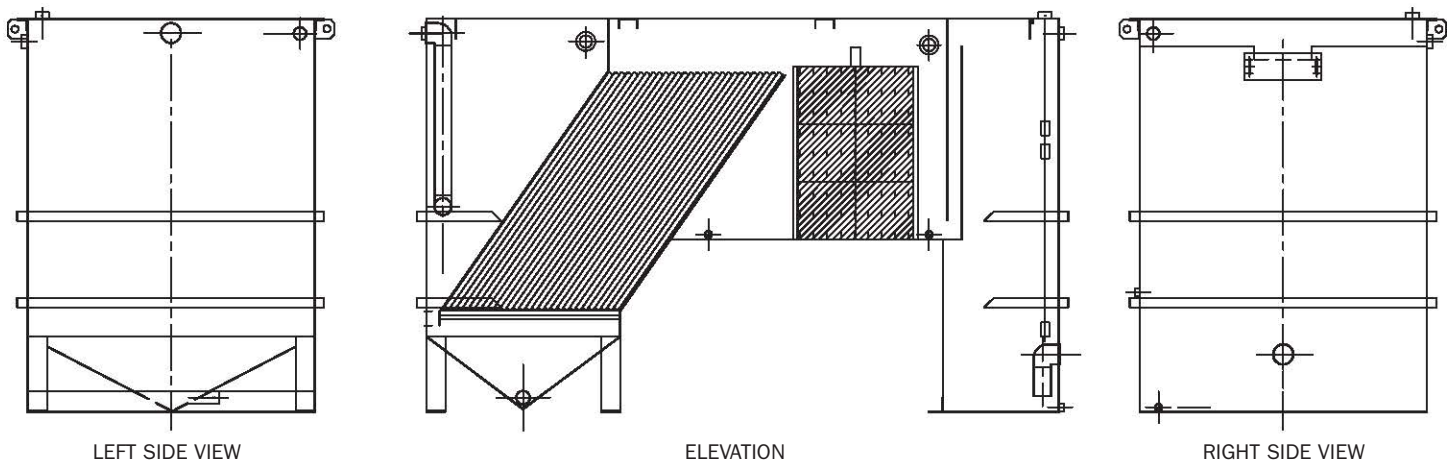

SPECIFICATIONS FOR SMALLER UNITS (SINGLE-HOPPER)


*Dimensions are approximate and may vary depending on your application.

| Model | BPD (BARRELS PER DAY) | Inlet Outlet Dia. | Width | Height | Length | Clarifier Projected Plate (FT ²) | Separator Coalescing Media (FT ³) | Flow Rate (GPM) | Sludge Volume (GAL) | Capacity (GAL) |
|------------|-----------------------------|-------------------------|-------|--------|--------|--|---|-----------------------|---------------------------|-------------------|
| HQI-CS-10 | 342 | 2" | 2' 4" | 4' 10" | 7' 0" | 40 | 4 | 10 | 27 | 300 |
| HQI-CS-20 | 685 | 2" | 3' 4" | 5' 10" | 8' 0" | 80 | 6 | 20 | 32 | 652 |
| HQI-CS-30 | 1,028 | 2" | 3' 4" | 5' 10" | 9' 2" | 120 | 12 | 30 | 45 | 645 |
| HQI-CS-50 | 1,714 | 3" | 4' 4" | 5' 10" | 9' 8" | 200 | 24 | 50 | 85 | 968 |
| HQI-CS-75 | 2,571 | 3" | 4' 4" | 7' 10" | 10' 6" | 300 | 24 | 75 | 85 | 1,766 |
| HQI-CS-100 | 3,428 | 4" | 5' 4" | 7' 10" | 11' 0" | 400 | 30 | 100 | 107 | 1,931 |
| HQI-CS-150 | 5,142 | 6" | 6' 6" | 8' 4" | 12' 0" | 600 | 64 | 150 | 300 | 3,483 |


Oil Removal of 20 Micron Based on Flow Rates

Clarifier Projected Plate based on .25 gpm per sq. ft.


Design Temperature 40° F (5° C)

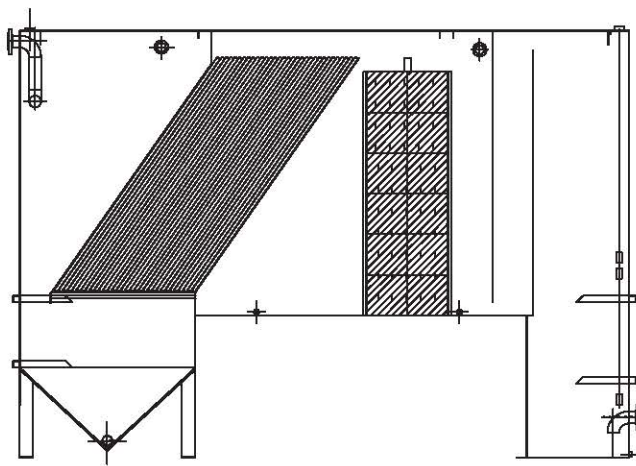

ELEVATION



LEFT SIDE VIEW



RIGHT SIDE VIEW

SPECIFICATIONS FOR LARGER UNITS (DOUBLE-HOPPER)

*Dimensions are approximate and may vary depending on your application.

| Model | BPD (BARRELS PER DAY) | Inlet Outlet Dia. | Width (FT) | Height (FT) | Length (FT) | Clarifier Projected Plate (FT ²) | Separator Coalescing Media (FT ³) | Flow Rate (GPM) | Sludge Volume (GAL) | Capacity (GAL) |
|------------|-----------------------------|-------------------------|---------------|----------------|----------------|--|---|-----------------------|---------------------------|-------------------|
| HQI-CS-200 | 6,857 | 6" | 7' 6" | 9' 6" | 14' 0" | 800 | 80 | 200 | 300 | 5,496 |
| HQI-CS-250 | 8,571 | 8" | 8' 6" | 10' 6" | 15' 0" | 1,000 | 96 | 250 | 350 | 6,986 |
| HQI-CS-300 | 10,285 | 8" | 8' 6" | 10' 6" | 16' 0" | 1,200 | 120 | 300 | 400 | 6,846 |
| HQI-CS-350 | 12,000 | 8" | 8' 6" | 10' 6" | 18' 0" | 1,400 | 144 | 350 | 425 | 7,633 |
| HQI-CS-400 | 13,714 | 8" | 8' 6" | 10' 6" | 19' 0" | 1,600 | 150 | 400 | 500 | 8,138 |
| HQI-CS-450 | 15,428 | 8" | 8' 6" | 10' 6" | 20' 0" | 1,800 | 168 | 450 | 525 | 8,612 |
| HQI-CS-500 | 17,142 | 8" | 8' 6" | 10' 6" | 21' 4" | 2,000 | 210 | 500 | 550 | 9,220 |
| HQI-CS-550 | 18,857 | 8" | 8' 6" | 10' 6" | 22' 6" | 2,200 | 210 | 550 | 675 | 9,765 |
| HQI-CS-600 | 20,570 | 10" | 9' 6" | 10' 6" | 22' 0" | 2,400 | 252 | 600 | 700 | 12,285 |
| HQI-CS-700 | 24,000 | 10" | 10' 6" | 11' 6" | 25' 0" | 2,800 | 280 | 700 | 750 | 15,440 |
| HQI-CS-800 | 27,428 | 10" | 10' 6" | 11' 6" | 26' 0" | 3,200 | 315 | 800 | 775 | 16,077 |
| HQI-CS-900 | 30,850 | 12" | 10' 6" | 11' 6" | 27' 0" | 3,600 | 350 | 900 | 800 | 16,717 |

Oil Removal of 30 Micron Based on Flow Rates

Clarifier Projected Plate based on .25 gpm per sq. ft.

Design Temperature 40° F (5° C)



Whether an off-the-shelf unit or customized equipment, we'll help you determine the best solution for your application and site-specific needs.

TEL: 508-399-5771

FAX: 508-399-5352

108 Pond St, Seekonk, MA 02703

hqisales@hydroquipinc.com

www.hydroquipinc.com

SECTION 11XXX

DISSOLVED AIR FLOTATION (DAF) CLARIFIER SPECIFICATIONS

PART 1 - GENERAL

1.01 SECTION INCLUDES

- A. Furnish complete, tested and operating, the equipment as shown on the Drawings and as specified herein.
- B. Work Included in This Section:
 - 1. Dissolved Air Flotation with selected options.

1.02 SUBMITTALS

- A. Shop Drawings: Upon agreement to terms, and receipt of a purchase order, Ellis Corporation will submit 2 sets of shop drawings (approval drawings) of the DAF clarifier and included options. Shop drawings to be reviewed by the ENGINEER (Or agent). Requests for modifications to the shop drawings will be addressed by Ellis Corporation and revised shop drawings will be resubmitted to the ENGINEER until satisfactory to the ENGINEER. Approved drawings will be signed and returned to Ellis Corporation.
- B. Manuals: Ellis will furnish 2 sets of operation and maintenance manuals prior to or with delivery of the DAF separator.

1.03 QUALITY ASSURANCE

- A. All equipment furnished under this section shall be tested prior to delivery. All welded joints shall be double welded and leak tested. All electrical components shall be shop tested for proper operation, rotation, and response.

1.04 WARRANTY

- A. Ellis Corporation warrants the equipment manufactured by it to be free from defects in material and workmanship for a period of 1 (one) year from the date of shipment, provided the machine is operated normally and at its rated capacity. Modifications to the equipment or the use of repair parts not approved by the company will subject the warranty to cancellation.

1.05 The Dissolved Air Flotation System shall be designed, manufactured and warranted by Ellis Corporation, Industrial Water Division, Itasca, Ill.

PART 2 - PRODUCTS

2.01 DISSOLVED AIR FLOTATION CLARIFIER

The Dissolved Air Flotation Clarifier is specifically designed to remove fats, oils, greases (FOG) and other suspended solids from a wastewater flow. Equipment is completely assembled and ready for installation on a concrete pad. Typical removal rates (with proper chemical treatment) are 95% and greater for both FOG's and suspended solids.

A. Separation Chamber

The separation chamber provides an excellent medium for solids flotation. Strategically placed baffles force float to the top of the unit, while driving sludge to the bottom and allowing clean water to carry through. The design allows for minimal velocities in the float region and the large float area in a compact design.

B. Skimmer Assembly

The all stainless steel surface skimmers are designed to skim the topmost portion of the accumulated float. The design of the skimmer is of the Ferris wheel type with the end of the skimming blade always pointing downward. The blade is mounted in a pivot to allow the skimmer to rotate during the skim and return cycle. This will prevent solids from accumulating on the blade surface. Skimmer driven by a variable speed drive.

C. Float Chamber

The float chamber is designed to isolate the solids from the waste stream and to provide storage capacity. The bottom of this chamber has sloped sides to form a "V" bottom to permit near complete pump out of the accumulated solids. The chamber also has provisions for sludge removal.

D. Solids chamber and auger

The lower portion of the solids chamber has sloped sides to form a "V" bottom chamber extending the length of the solids chamber. The "V" bottom chamber is equipped with a slowly rotating ribbon type screw auger to convey heavy gritty solids to a sludge discharge nozzle.

E. Effluent Chamber

An effluent chamber is provided to isolate clean water from the waste stream. Water flows into the effluent chamber via an adjustable weir. Positioning the 304 stainless steel adjustable weir sets the water level. This chamber has a discharge nozzle and provisions for recycle flow.

F. Dissolved Air Flotation pump

The dissolved air flotation pump is provided to dissolve the air into the water. An air control system is provided to meter air into the pump at specified rates. Air bubbles of roughly 30 micron will result through proper operation of the pump. Cast iron casing with 316 SS shaft and flooded suction.

G. Materials of Construction

Tank is fabricated of heavy duty A-36 Carbon Steel Plate or 304 SS. Joints are double welded and leak tested. Exterior Structural members are constructed of A-36 carbon steel.

H. Finish – Stainless steel does not receive coatings

Interior: Surface prepared to SSPC-SP-10, near white metal blast and coated with multiple coats of coal tar epoxy, 14-16 dmt.

Exterior: Surfaces prepared to SSPC-SP-6, commercial blast and coated with a chromate free primer, rust color, 4 dmt. Top coat polyurethane enamel, 2 dmt. Finish color safety blue.

2.02 SLUDGE PUMPOUT SYSTEM – THIS IS OPTION “A”

A. An electrically operated progressive cavity positive displacement pump with intermittent timer. Automatic operation with manual override. System installed with PVC piping.

2.03 CHEMICAL PUMPS

A. Chemical pumps are supplied to inject chemicals into a preceding chemical mix tank to the DAF. The pumps are rated for 10 gph.

2.04 CONTROL PANEL

A. NEMA-4 Control panel with indicator light(s), switch(es), timer(s), motor starter(s), alarm light(s), alarm(s) with silence switch. Panel to control all components furnished by Ellis Corporation.

PART 3 - EXECUTION

3.01 INSTALLATION

A. Equipment will be delivered to project site (terms as per contract). Installation Contractor is responsible for preparation of concrete pad (or other approved surface) and all anchor bolts. Holes for anchor bolts are as per shop drawings.

3.02 START-UP ASSISTANCE

A. Ellis Corporation will assist in the start-up of the system and instruction in the proper use of the equipment if required.

END OF SECTION

3 of 3

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.C
INSPECTION FORM (TYPICAL)**

ATTACHMENT II.1.C
Inspection Form (Typical)
DNCS Environmental Solutions

Date: _____ **Print Name:** _____
Others: _____ **Signature:** _____

Inspection will be in accordance with NMOCD operational conditions.

| Item | Satisfactory | Action Required |
|--|--------------|------------------------------------|
| Entrance Sign | | |
| Berms and outside pond levees | | |
| Tank Labels | | |
| Sumps | | |
| Pond levels three-foot free board | | |
| Free oil on Pits-Ponds | | |
| Pit and Pond condition | | |
| Pit and Pond marker numbers | | |
| Treatment Plant inspection | | |
| Solid waste disposal area inspection | | |
| Blowing trash | | |
| Fences and Gates | | |
| Leak detection sumps - Landfill - Liquid present? | | (Monthly analysis required if yes) |
| Leak detection sumps - Evaporation Ponds - Liquid present? | | (Monthly analysis required if yes) |
| Leak detection sumps - Jet Out Pit - Liquid present? | | (Monthly analysis required if yes) |
| Leak detection sumps - Stab. & Solid. - Liquid present? | | (Monthly analysis required if yes) |
| Landfill Leachate Sump | | |
| Groundwater Monitoring | | |
| Pond Sludge Depth | | |

***Comments & Repairs:** _____

H₂S

READINGS ARE TO BE TAKEN 4 FT DOWNWIND FROM EVAPORATION PONDS

Evaporation Pond (readings in ppm):

POND

1
2
3
4
5
6
7
8
9
10
11
12

*In the event that a reading of 10 ppm is registered at the Facility, personnel will evacuate the area and operator will monitor H₂S levels at the downwind of the Pond. If H₂S levels reach 20 ppm, the Facility will be closed and notification will be given to the following:

| | | | |
|-------------------------|--------------|----------------|--------------|
| DNCS Office | 575-XXX-XXXX | NMOCD Hobbs | 575-393-6161 |
| New Mexico State Police | 575-392-5580 | NMOCD Santa Fe | 505-476-3440 |
| Lea County Sheriff | 575-397-3611 | | |

Receipt & Approval

Name: _____

Date: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.D
POND INTEGRITY/LEAK DETECTION INSPECTION FORM (TYPICAL)**

ATTACHMENT II.1.D
Pond Integrity/Leak Detection Inspection Checklist (Typical)
DNCS Environmental Solutions

Page ____ of ____

Date: _____

Inspector(s): _____

Time: _____

Weather:

Temperature _____ deg. F

Precipitation (last 24 hours) _____ inches

Skies _____

Wind Speed _____ mph

Wind Direction _____ (direction blowing from)

NOTES:

"X" indicates that a Deficiency has been noted. "P" indicates that a Photograph has been taken. "S" indicates that a Sample has been collected. Complete descriptions of Deficiencies, Photographs, and Samples are provided on attached pages. Items are referenced by Location.

POND CONDITION

| Location | Item | | | |
|----------|---------|---------------------------|---------|--------|
| | Erosion | Vegetation Established | Vectors | Sample |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

LEAK DETECTION SYSTEM

| Riser # | Deficiency | |
|---------|------------------------------|----------------------|
| | Depth of H ₂ O | Structural Defect |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

NOTES:

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.E
POTENTIAL GEOMEMBRANE LINER LEAKAGE**

Title: Leakage Through Liners Constructed with Geomembranes - Part 1. Geomembrane Liners

Written by: J.P. Giroud and R. Bonaparte

Published in: Geotextiles and Geomembranes Volume: 8 Issue: 2 Pages: 27 to 67

Phone: +31 20-485-3757 ~ Web Site: <http://www.elsevier.com>

How impermeable are 'impermeable liners'? All liners leak, including geomembranes, but how much? What are the mechanisms of leakage through liners constructed with geomembranes? To answer these questions, a detailed review of leakage mechanisms, published and unpublished data, and analytical studies has been carried out with the goal of providing practical design recommendations. In particular, it appears that a composite liner (i.e. geomembrane on low-permeability soil) is more effective in reducing the rate of leakage through the liner than either a geomembrane alone or a soil liner (low-permeability soil layer) alone. However, the paper shows that the effectiveness of composite liners depends on the quality of the contact between the geomembrane and the underlying low-permeability soil layer.

Table 1
Calculated Leakage Rates Due to Pinholes and Holes in a Geomembrane

| Water depth on top of the geomembrane, h_w | | | | | | |
|--|-----------------------|----------------------|--------------------|-------------------|--------------------|---------------------|
| | Defect Diameter | 0.003 m (0.01 ft) | 0.03 m (0.1 ft) | 0.3 m (1 ft) | 3 m (10 ft) | 30 m (100 ft) |
| Pinholes | 0.1 mm (0.004 in) | 0.006 (0.0015) | 0.06 (0.015) | 0.6 (0.15) | 6 (1.5) | 60 (15) |
| | 0.3 mm (0.012 in) | 0.5 (0.1) | 5 (1) | 50 (13) | 500 (130) | 5000 (1 300) |
| Holes ^a | 2 mm (0.08 in) | 40 (10) | 130 (30) | 400 (100) | 1300 (300) | 4000 (1 000) |
| | 11.3 mm (0.445 in) | 1 300 (300) | 4 000 (1 000) | 13 000 (3 000) | 40 000 (10 000) | 130 000 (30 000) |
| Values of leakage rate in liters/day (gallons/day) | | | | | | |

Table 2
Calculated Unitized Leakage Rates Due to Permeation of Water Through an HDPE Geomembrane

| Water depth on top of the geomembrane, h_w | | | | | | |
|---|---------------|----------------------|---------------------|---------------------|---------------------|---------------------|
| | 0 m (0 ft) | 0.003 m (0.01 ft) | 0.03 m (0.1 ft) | 0.3 m (1 ft) | 3 m (10 ft) | > 10 m (> 30 ft) |
| Coefficient of migration, m_g (m ² /s) | 0 | 9×10^{-20} | 9×10^{-18} | 9×10^{-16} | 9×10^{-14} | 3×10^{-13} |
| Unitized leakage rate, q_q (m/s) | 0 | 9×10^{-17} | 9×10^{-15} | 9×10^{-13} | 9×10^{-11} | 3×10^{-10} |
| (lphd) | 0 | 8×10^{-5} | 0.008 | 0.8 | 80 | 260 |
| (gpad) | 0 | 8×10^{-6} | 0.0008 | 0.08 | 8 | 28 |

Notes: These values of utilized leakage rates were calculated using eqn (5) and assuming a geomembrane thickness of 1 mm (40 mils). The coefficients of migration used to calculate the unitized leakage rates in this table were obtained from eqns (19) and (20), with $C_1 = 1 \times 10^{-22} \text{ m}^4 \text{ kg}^{-2} \text{ s}^3$, $n = 2$, and $m_{g\max} = 3 \times 10^{-13} \text{ m}^2/\text{s}$.

The water depths used here correspond to the typical values defined in Section 1.3.6. (To use eqn (19), it is necessary to know the pressure difference, Δp . According to eqn (1), water depths, h_w , are approximately equal to hydraulic head differences, Δh , which are related by eqn (12) to pressure differences, Δp .)



[geosynthetica.net](http://www.geosynthetica.net) is a free technical information resource for all geosynthetics users and industry members. Technical information is available regarding geomembranes, woven & nonwoven geotextiles, geogrids, geosynthetic clay liners (gcls), geocomposites, geocells, geotextile tubes, geonets, geofoam and all other forms of geosynthetics. As well, the site covers many different applications including environmental & hazardous waste containment, landfill, mining, agriculture, aquaculture, construction, transportation, recreation, erosion control, reinforcement, barriers, drainage and filtration. Please use the navigation bar above to search for standards, specifications, technical guidance tools, calendar of events, industry resources, directory, news, employment opportunities, resin pricing and much more!

©2008 Geosynthetica.net. All Rights Reserved. tel: +1-561-655-2060, fax: +1-561-655-9922 info@geosynthetica.net

[Privacy Policy](#) | [CSS](#)

[Home](#) [About](#) [Advertise](#) [Buyer's Guide](#) [Calendar](#) [Employment](#) [Links](#) [News](#) [Pubs/Tech Docs](#) [Resin](#) [Specifications](#) [Standards](#) [Directory](#)

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.F
PAINT FILTER TEST PROTOCOL
USEPA METHOD 9095B**

METHOD 9095B

PAINT FILTER LIQUIDS TEST

1.0 SCOPE AND APPLICATION

1.1 This method is used to determine the presence of free liquids in a representative sample of waste.

1.2 The method is used to determine compliance with 40 CFR 264.314 and 265.314.

2.0 SUMMARY OF METHOD

2.1 A predetermined amount of material is placed in a paint filter. If any portion of the material passes through and drops from the filter within the 5-min test period, the material is deemed to contain free liquids.

3.0 INTERFERENCES

3.1 Filter media were observed to separate from the filter cone on exposure to alkaline materials. This development causes no problem if the sample is not disturbed.

3.2 Temperature can affect the test results if the test is performed below the freezing point of any liquid in the sample. Tests must be performed above the freezing point and can, but are not required to, exceed room temperature of 25 °C.

4.0 APPARATUS AND MATERIALS

4.1 Conical paint filter -- Mesh number 60 +/- 5% (fine meshed size). Available at local paint stores such as Sherwin-Williams and Glidden.

4.2 Glass funnel -- If the paint filter, with the waste, cannot sustain its weight on the ring stand, then a fluted glass funnel or glass funnel with a mouth large enough to allow at least 1 in. of the filter mesh to protrude should be used to support the filter. The funnel should be fluted or have a large open mouth in order to support the paint filter yet not interfere with the movement, to the graduated cylinder, of the liquid that passes through the filter mesh.

4.3 Ring stand and ring, or tripod.

4.4 Graduated cylinder or beaker -- 100-mL.

5.0 REAGENTS

5.1 None.

6.0 SAMPLE COLLECTION, PRESERVATION, AND HANDLING

A 100-mL or 100-g representative sample is required for the test. If it is not possible to obtain a sample of 100 mL or 100 g that is sufficiently representative of the waste, the analyst may use larger size samples in multiples of 100 mL or 100 g, i.e., 200, 300, 400 mL or g. However, when larger samples are used, analysts shall divide the sample into 100-mL or 100-g portions and test each portion separately. If any portion contains free liquids, the entire sample is considered to have free liquids. If the sample is measured volumetrically, then it should lack major air spaces or voids.

7.0 PROCEDURE

7.1 Assemble test apparatus as shown in Figure 1.

7.2 Place sample in the filter. A funnel may be used to provide support for the paint filter. If the sample is of such light bulk density that it overflows the filter, then the sides of the filter can be extended upward by taping filter paper to the inside of the filter and above the mesh. Settling the sample into the paint filter may be facilitated by lightly tapping the side of the filter as it is being filled.

7.3 In order to assure uniformity and standardization of the test, material such as sorbent pads or pillows which do not conform to the shape of the paint filter should be cut into small pieces and poured into the filter. Sample size reduction may be accomplished by cutting the sorbent material with scissors, shears, a knife, or other such device so as to preserve as much of the original integrity of the sorbent fabric as possible. Sorbents enclosed in a fabric should be mixed with the resultant fabric pieces. The particles to be tested should be reduced smaller than 1 cm (i.e., should be capable of passing through a 9.5 mm (0.375 inch) standard sieve). Grinding sorbent materials should be avoided as this may destroy the integrity of the sorbent and produce many "fine particles" which would normally not be present.

7.4 For brittle materials larger than 1 cm that do not conform to the filter, light crushing to reduce oversize particles is acceptable if it is not practical to cut the material. Materials such as clay, silica gel, and some polymers may fall into this category.

7.5 Allow sample to drain for 5 min into the graduated cylinder.

7.6 If any portion of the test material collects in the graduated cylinder in the 5-min period, then the material is deemed to contain free liquids for purposes of 40 CFR 264.314 and 265.314.

8.0 QUALITY CONTROL

8.1 Duplicate samples should be analyzed on a routine basis.


9.0 METHOD PERFORMANCE

9.1 No data provided.


10.0 REFERENCES

10.1 None provided.

FIGURE 1
PAINT FILTER TEST APPARATUS

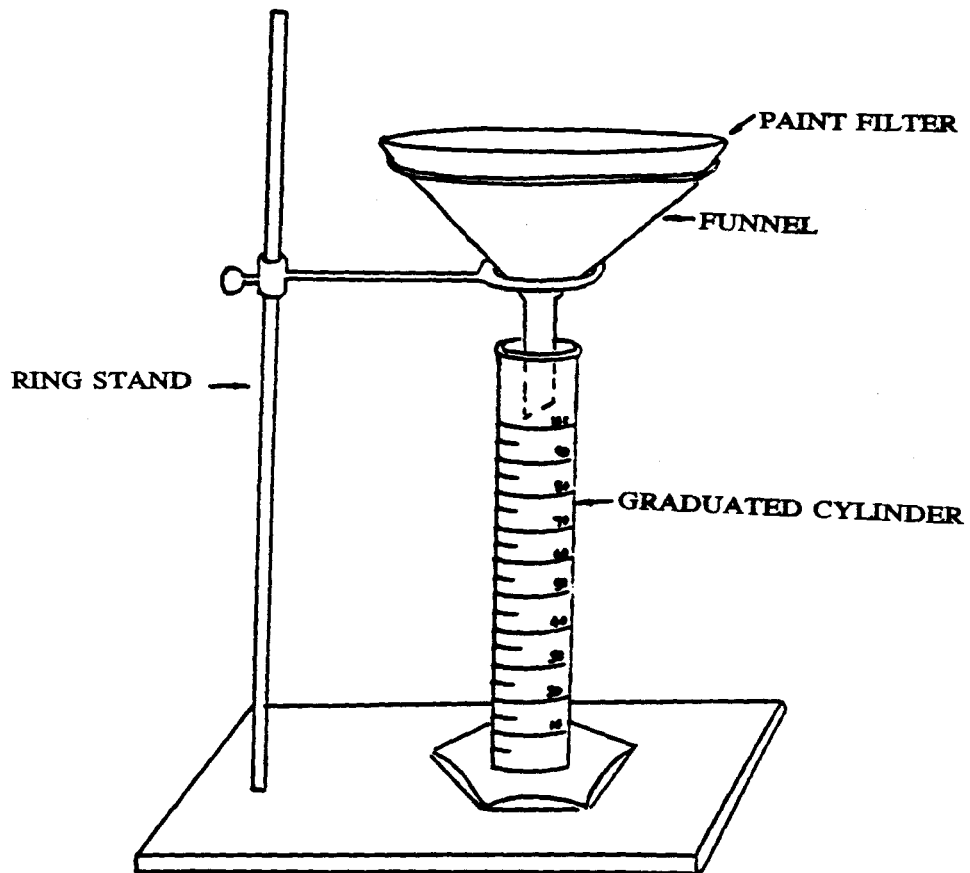

METHOD 9095B
PAINT FILTER LIQUIDS TEST

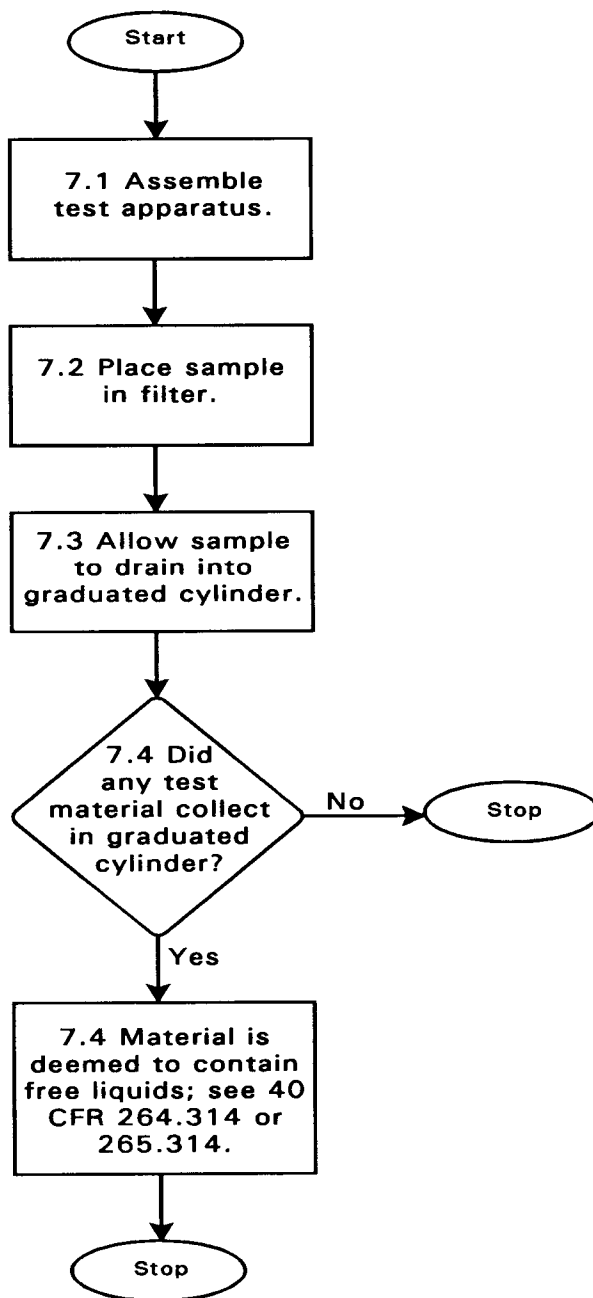

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 1: OPERATIONS, INSPECTION AND MAINTENANCE PLAN**

**ATTACHMENT II.1.G
INTERMEDIATE COVER INSPECTION AND MAINTENANCE PLAN**

ATTACHMENT II.1.G
INTERMEDIATE COVER INSPECTION AND MAINTENANCE PLAN

TABLE OF CONTENTS

| | | |
|-------|--|---|
| 1.0 | INTRODUCTION | 1 |
| 2.0 | INTERMEDIATE COVER | 1 |
| 2.1 | Intermediate Cover Inspection Program | 1 |
| 2.2 | Intermediate Cover Maintenance Program | 2 |
| 2.2.2 | Soil Repair | 2 |
| 2.2.3 | Vegetation | 2 |

LIST OF FIGURES

| Figure No. | Title |
|-------------------|------------------------------------|
| II.1.G.1 | Intermediate Cover Inspection Form |

1.0 INTRODUCTION

In accordance with 19.15.36.14(7)(a-c) NMAC landfills are required to provide intermediate cover for areas that will not receive additional oil field waste for one month or more. In addition to being approved by the Oil Conservation Division, intermediate cover must be stabilized with vegetation, and inspected and maintained to prevent erosion and manage infiltration or leachate during the oil field waste deposition process. DNCS Properties, LLC (DNCS) is requesting deviation from the vegetation requirement. DNCS proposes to maintain, as best possible, natural vegetation on the intermediate cover, but does not plan to seed intermediate cover. This Intermediate Cover Inspection and Maintenance Plan (the Plan) provides a protocol for regular monitoring and maintenance of intermediate cover at the DNCS Environmental Solutions Surface Waste Management Facility Landfill.

2.0 INTERMEDIATE COVER

At DNCS, intermediate landfill cover is proposed to consist of a soil cover a minimum of 6-inches thick. Intermediate cover will be placed over areas of the landfill that will not receive further oil field waste for one month or more, but have not reached final grades. Intermediate cover is graded to promote positive drainage and limit erosion and infiltration. The intermediate cover will be inspected and maintained until additional waste placement has been conducted or final cover is constructed. If additional waste placement is to occur, the upper layer of intermediate cover may be removed prior to additional waste placement. Inactive areas with intermediate cover will be stabilized via the routine inspection and maintenance program described below:

2.1 Intermediate Cover Inspection Program

Areas of the DNCS Landfill that have intermediate cover installed will be inspected routinely, at a minimum of once per month and also after significant (≥ 0.5 inches) rain events. Inspections will be recorded on a form similar to that provided as **Figure II.1.G.1** (Intermediate Cover Inspection Form). The form will be used to record intermediate cover observations, and photo-documentation will supplement the record as necessary. The Intermediate Cover Inspection Forms will be maintained as part of the Facility Operating Record, and will elaborate on the following items, as applicable:

- Evidence of leachate
- Unusual odors

- Exposed waste
- Cracks greater than one inch in width and six inches in depth
- Surface water ponding
- Eroded or scoured soils
- Dead or stressed vegetation (if applicable)
- Vegetation growing taproots in areas not designated to accommodate them
- Vectors, such as flies and rodents
- Recordkeeping and reporting

Deficiencies identified during site inspections will be corrected within 90 days. Upon completion of the corrective action, appropriate documentation will be made on the Intermediate Cover Inspection Form and placed in the Facility Operating Record.

2.2 Intermediate Cover Maintenance Program

It is expected that routine site maintenance will be necessary to maintain intermediate cover. Intermediate cover is expected to require periodic maintenance such as soil enhancement/repair, and attention to naturally established vegetative cover.

2.2.2 Soil Repair

Intermediate cover repairs may be necessary due to ponding, surface water erosion or wind erosion. Ponding can result from differential settlement of the landfill contents, and erosion can be caused by runoff in areas without established vegetation or by repeated wind gusts. Areas where impacts are evident will be promptly repaired to maintain the integrity of the cover. Recently filled and covered areas will require the most maintenance since differential settlement decreases rapidly with time, and erosion is minimized as vegetation is established. Soil for repairs will be obtained from on-site sources. Repairs will be made on an as-needed basis.

2.2.3 Vegetation

Intermediate cover will not be seeded for vegetative growth; however, DNCS will routinely attempt to maintain any naturally-established vegetative cover. Routine care includes, but is not limited to, the removal of undesirable plant species (e.g., taproots) and maintenance of native plant species as appropriate.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-----------------------------------|
| 1.0 | INTRODUCTION | II.2-1 |
| 1.1 | Site Location | II.2-1 |
| 1.2 | Facility Description..... | II.2-1 |
| 2.0 | PURPOSE | II.2-3 |
| 3.0 | OIL FIELD WASTE ACCEPTANCE PROGRAM..... | II.2-3 |
| 3.1 | Prohibited Wastes | II.2-4 |
| 3.2 | Oil Field Waste Inspection and Management | II.2-5 |
| 3.3 | Recordkeeping | II.2-8 |
| 3.4 | Site Generated Waste..... | II.2-Error! Bookmark not defined. |
| 4.0 | TRAINING | II.2-9 |

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|----------------------------------|-------------|
| II.2.1 | SITE LOCATION MAP | II.2-2 |
| II.2.2 | INSPECTION LANDING EXAMPLE | II.2-6 |

LIST OF TABLES

| Table No. | Title | Page |
|------------------|---------------------------------|-------------|
| II.2.1 | WASTE ACCEPTANCE PROTOCOL | II.2-4 |
| II.2.2 | TESTING REQUIREMENTS | II.2-9 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| II.2.A | REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE, OCD FORM C-138 |
| II.2.B | AUTHORIZATION TO MOVE PRODUCED WATER, OCD FORM C-133 |
| II.2.C | PAINT FILTER TEST PROTOCOL, USEPA METHOD 9095B |
| II.2.D | DISPOSAL LOG (TYPICAL) |
| II.2.E | OPERATOR'S MONTHLY REPORT, OCD FORM C-115 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oilfield waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.2.1**). Site access will be provided via the south side of NM 529.

1.2 Facility Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components; a liquid oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Development Plan provided in the **Permit Plans** identifies the locations of the Processing Area and Landfill facilities.

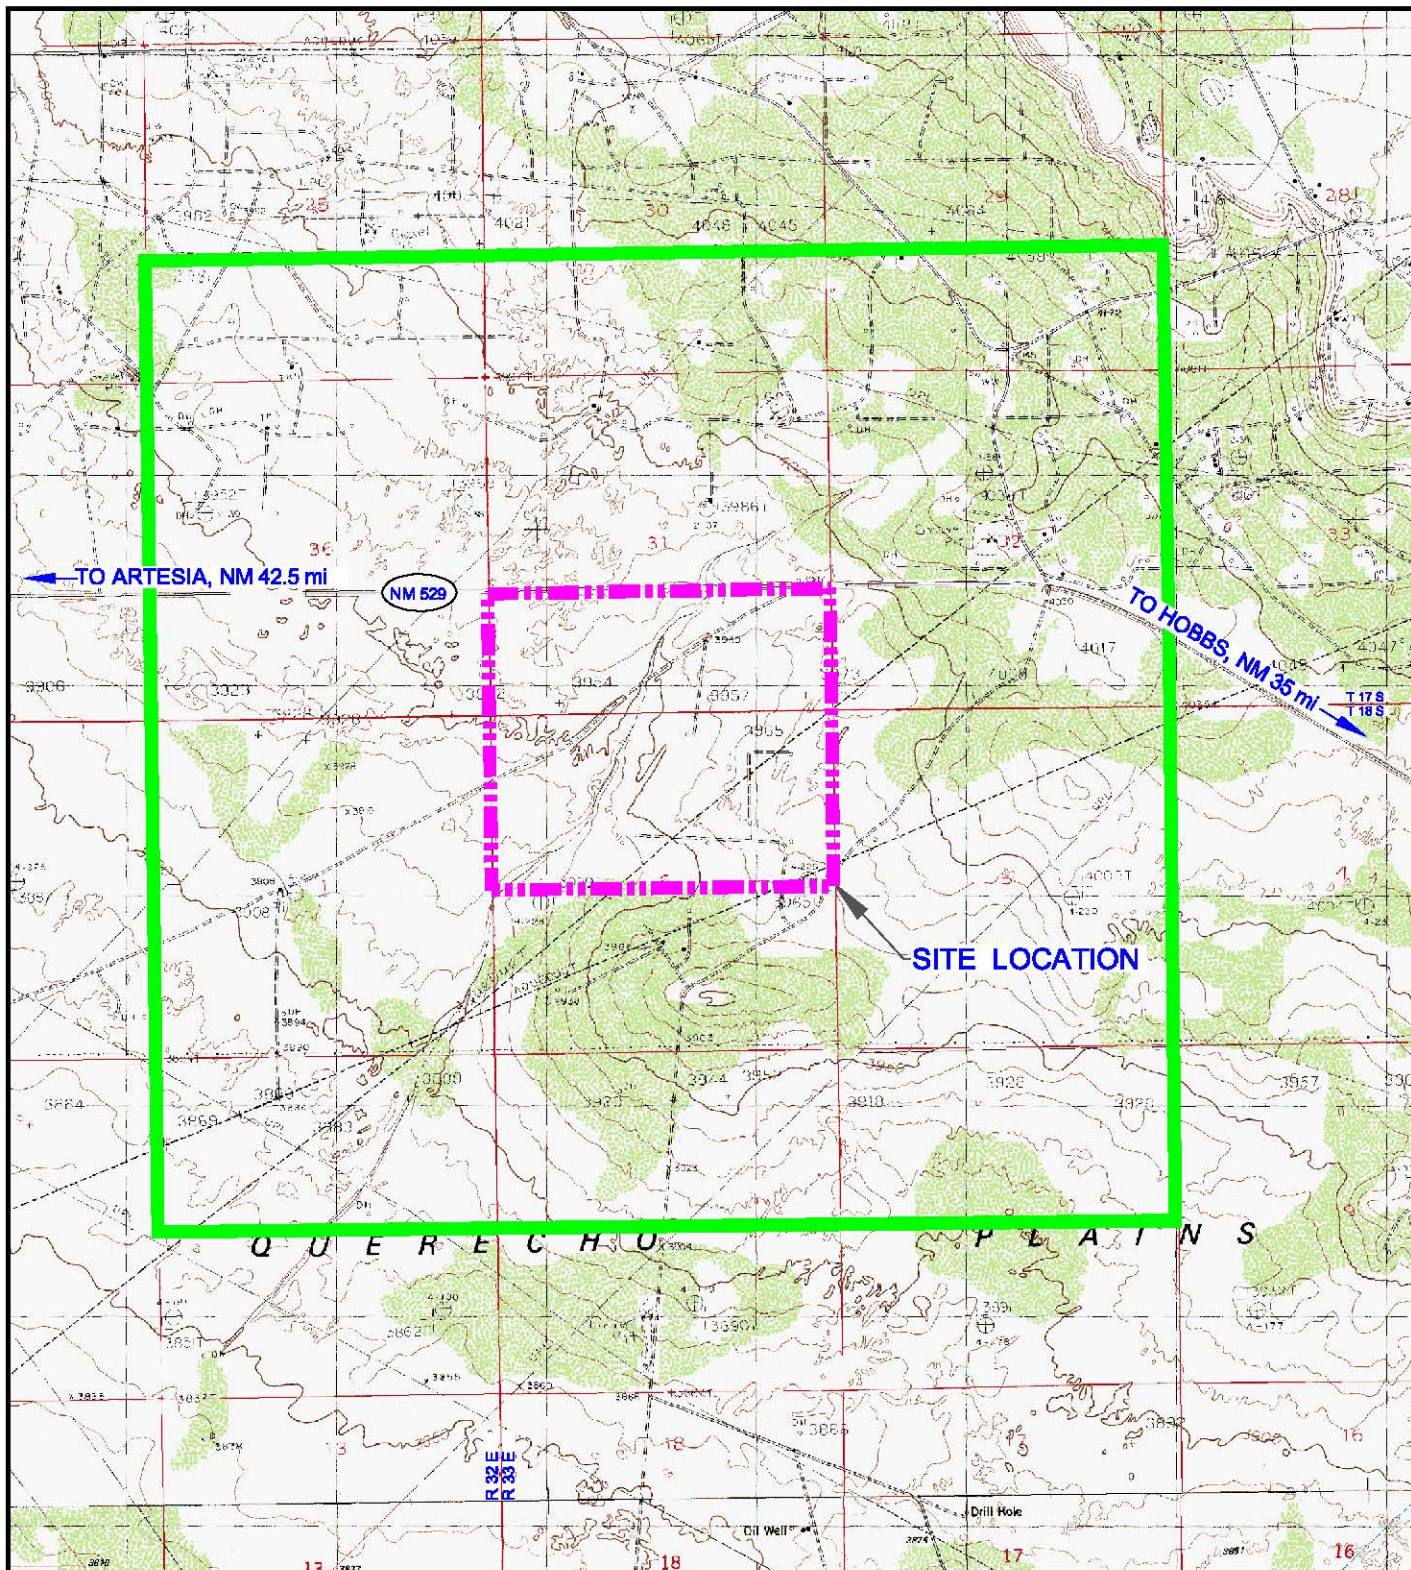


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:48:59 ; LAYOUT: A (P)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.2.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

2.0 PURPOSE

This Oil Field Waste Management Plan (the Plan) addresses the requirements of 19.15.36.13, 14, 15, and 17 NMAC, and establishes an internal control program that will be followed by DNCS to ensure that oil field wastes receive attention commensurate with the associated risk. The purpose of this Plan is to provide waste identification, tracking and screening mechanism for OCD waste that may require special handling to meet regulatory requirements and/or to protect employee health and safety. The oil field wastes discussed in this Plan will be limited to those materials that have met specific disposal requirements as described in Sections 13, 14, 15, and 17 of 19.15.36 NMAC; and 19.15.35.8 NMAC.

3.0 OIL FIELD WASTE ACCEPTANCE PROGRAM

A decision to approve or disapprove incoming oil field waste for management at the DNCS Facility will be clearly documented for each load received at the Facility, as delineated on **Table II.2.1**. Disposal operations at DNCS will only be conducted when an attendant is on duty. DNCS plans to conduct Facility operations 24 hours a day, 7 days a week. The Facility will be secured with barbed wire fencing, cattle guards, and locking gates to prevent any unauthorized access or disposal when an attendant is not on duty. The temporary parking areas will be inspected for leakage, and vehicles will be required to have any valves or access ports secured and locked to prevent spillage or tampering. At a minimum, the following Waste Acceptance Protocol (**Table II.2.1**) requirements must be met prior to managing oil field waste at DNCS:

TABLE II.2.1
Waste Acceptance Protocol
DNCS Environmental Solutions

The Facility will notify the customer of necessary conditions/limitations that apply to managing the waste, and the customer will be required to comply with the conditions/limitations.

The customer must provide OCD Form C-138, *Request for Approval to Accept Solid Waste (Attachment II.2.A)* to the Facility that issues the following certification that the waste is exempt oil field waste.

I do hereby certify that, according to the Resource Conservation and Recovery Act (RCRA) and Environmental Protection Agency's July, 1988, regulatory determination, any and all waste delivered to DNCS from the above locations is: EXEMPT oilfield waste. This waste is

in compliance with Regulated Levels of Naturally Occurring Radioactive Material (NORM) pursuant to 20 NMAC 3.1 Subpart 1403.C and D.

Should the generator or their authorized representative fail to sign the OCD Form C-138, the load of oil field waste will be rejected.

1. For Exempt Liquid Wastes:

Commercial or industrial customers will also be required to provide a valid *Authorization to Move Produced Water*, OCD Form C-133 (**Attachment II.1.B**). After authenticating the OCD Form C-133, DNCS will verify that the customer is an authorized hauler by checking it against the OCD monthly updated list located at <http://www.emnrd.state.nm.us/oed/Statistics.htm>. DNCS will pursue the following protocol in managing the OCD Form C-133:

- a) Monthly, the General Manager will provide the Facility personnel an updated list.
- b) The OCD Form C-133 list will be maintained onsite in the DNCS administrative files.
- c) Prior to accepting any material, Facility personnel will ensure that the hauling company has a valid OCD Form C-133 approval.
- d) If a valid OCD Form C-133 is not on file, the hauler will not be allowed to unload the liquid waste.
- e) The General Manager or other appropriate DNCS management personnel will be contacted if assistance is needed.

2. For Solid Waste:

In addition to providing OCD Form C-138, solid waste receipts will be subject to confirmation that the materials pass the Paint Filter Test (EPA 9095B). The protocol for this test is included as **Attachment II.2.C**.

3. For Materials Delivered to be Stabilized and Solidified:

These materials will be stabilized and solidified utilizing the procedures outlined in **Volume II, Section 1** and confirmed that the materials pass the Paint Filter Test prior to transporting them to the landfill for disposal.

3.1 Prohibited Wastes

Regulated non-exempt hazardous waste and non-exempt Naturally Occurring Radioactive Material (NORM) wastes which are subject to other Federal or State regulations are prohibited at DNCS. Generators/haulers with these wastes will be referred to a United States Environmental Protection Agency (USEPA) Resource Conservation and Recovery Act (RCRA) permitted facility (i.e., WCS, Andrews County, TX).

3.2 Oil Field Waste Inspection and Management

Once the required paperwork has been reviewed and verified, each load will be inspected to ensure compliance with 19.15.36.13.F NMAC. Inspections consist of:

1. Examination of Fluid from Load

- a) Loads will be checked prior to acceptance to check for the presence of non-permitted materials (e.g., compressor oil) and to determine the solid content of the load (i.e., is the load “clean” or “dirty”) for the purposes of proper handling.
- b) Every truck will stop at an inspection landing (similar to the one shown in **Figure II.2.2**) for evaluation by site personnel.
- c) Facility personnel will not step onto the truck until the driver has placed the truck in park with the brake applied, opened the door, and has his/her legs outside the cab. This is to ensure the truck does not move while Facility personnel are on the truck.
- d) Facility personnel will wear neoprene or other heavy duty non-permeable gloves.
- e) The cap on the tank will be opened and a metal rod will be inserted to the bottom of the tank.
- f) Care will be exercised because hydrogen sulfide (H₂S) may be present when the cap is opened. If there is any indication that H₂S may be present, the H₂S safety procedures will be followed (**Volume II.3**).
- g) Based on whether the rod contacts the metal bottom of the tank, or is slowed by sludge/solid material, Facility personnel will be able to gauge if the load may potentially be laden with sediment.
- h) The metal rod will be pulled out from the tank and the fluid on the rod examined for the presence of oils or other non-exempt materials.
- i) Odor can also be an indication if the load contains fluids that are non-exempt. Non-exempt waste with potential odors include:
 - a. Septic conditions
 - b. Caustic or acid cleaners
 - c. Methanol, unused
 - d. Pesticide and herbicide wastes
 - e. Solvents, spent (including waste solvents)

Non-compliant wastes are not accepted and will be rejected and returned to the Hauler/Generator.

2. Presence of H₂S

DNCS will monitor for H₂S on a continual basis on each oil field delivery waste vehicle arriving at the site. Monitoring for H₂S will be completed as follows:

- a) The battery and calibration date on the monitor will be checked to ensure both are current.



INSPECTION LANDING EXAMPLE

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.

Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

DATE: 10/22/2013

CAD: INSPECTION.dwg

PROJECT #: 542.01.01

DRAWN BY: JFP

REVIEWED BY: DRT

APPROVED BY: IKR

gei@gordonenvironmental.com

FIGURE II.2.2

Drawing: P:\acad 2003\542.01.01\PERMIT FIGURES\INSPECTION.dwg
Date/Time: Oct. 23, 2013-13:26:44
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2013

- b) DNCS personnel will position themselves as far away from the cap opening on the tank as possible, in order to minimize the potential for exposure. Safety is the most important consideration when checking for H₂S.
- c) DNCS personnel will use the H₂S monitor to determine the potential presence and concentration of H₂S (for specific operational instructions, refer to specific owner's manual for the monitoring instrument).
- d) The tube wand will be used to acquire a sample, and the H₂S reading and related notes will be recorded on the DNCS Disposal Log (**Attachment II.3.D**).

In the event of an H₂S detection of 10 ppm or greater, the following procedures will also be implemented by DNCS personnel:

- a) Notification of the presence of H₂S will be provided to both the driver (hauler) and the generator.
- b) The generator will be provided the option of allowing DNCS to treat the load on-site. Should the generator decline treatment, the load will be rejected and directed to leave the DNCS Facility.
- c) If the generator requests treatment, DNCS personnel will add calcium hypochlorite (Ca(ClO)₂) to the load at the levels corresponding to **Table II.3.6**.
- d) Once the Ca(ClO)₂ has been added, the load will be "rolled" [i.e., trucks will use their air pumps to "roll" air through the tank to allow for mixing of the contents and the added Ca(ClO)₂] to assist the chemical reaction. After approximately 20 minutes, the load will be re-sampled for the presence of H₂S. Treatment will continue until the H₂S reading is below 1 ppm. Once the H₂S measurement reads below 1 ppm, the load will be directed to the receiving area for processing.
- e) Treatment information and the final H₂S measurement will be recorded on the DNCS Disposal Log (**Attachment II.3.D**).
- f) DNCS personnel will contact the Generator's Plant Manager or General Manager if assistance is needed.

3. Presence of Non-Exempt fluids

- a) In the event compressor oil or other non-exempt fluids are detected, a sample of the fluid will be collected in a sample container.
- b) The date, generating company, hauler, and location will be noted on the container.
- c) The hauler will be prevented from unloading at the Facility.
- d) The Facility will contact the generator's Plant Manager or General Manager if assistance is needed.
- e) Samples will be maintained at the Facility for two weeks for inspection by the generator's personnel and OCD, as necessary.

4. Presence of High Solids Content

- a) In the event high solid/sludge content is suspected, a sample of the material will be collected in a sample container.
- b) The date, company, hauler, and location will be noted on the container.

- c) If the load cannot be accepted through the Produced Water Receiving Tanks due to high solids content, the hauler will contact the generator for permission to be charged for the cost of discharging through the Jet Out Pit.
- d) If the load cannot be accepted due to high solid content, the hauler will contact the production company to inform them that the load has been rejected, and the hauler will be prevented from unloading at the Facility.
- e) The Facility will contact the Generator's Plant Manager or General Manager if assistance is needed.
- f) Samples will be maintained at the Facility for two weeks for inspection by the generator's personnel.

5. Unloading

- a) DNCS anticipates a maximum of 8 unloading stations for Produced Water Receiving, and a maximum of 6 Jet Out Pit Bays.
- b) To minimize the chance for conflicts between trucks, only 14 trucks will be allowed past the inspection platform(s) at any one time once the Facility is fully operational. Prior to ultimate development, the number of trucks allowed past the inspection platform(s) will be limited to the total number of Produced Waters Receiving stations and Jet Out Pit Bays that are available for use.
- c) Trucks will pull up to the load-out station or back into the Jet Out Pit Bays as instructed by Facility personnel.
- d) Drivers will connect their grounding straps to the grounding stakes at their specific Load-Out Point.
- e) Trucks will off-load materials to Jet Out Tanks as appropriate.
- f) Trucks will exit the Facility as instructed.
- g) Failure of drivers to follow these procedures will be brought to the attention of Facility management for proper resolution with the hauling company.

3.3 Recordkeeping

Upon receipt of oil field waste, Facility employees will record the following into the Facility Disposal Log Book or similar (**Attachment II.2.D**).

- Generator
- Origin
- Date received
- Quantity
- Transporter
- Disposal location

Logbooks will be maintained for a minimum of 5 years after operations at the Facility have ceased. At the end of each month, the DNCS General Manager will compile information to be

submitted electronically to OCD on the OCD Form C-115, *Operator's Monthly Report* (**Attachment II.2.E**).

4.0 TRAINING

Facility employees will be trained and updated in the identification of oil field waste on at least an annual basis. Spotters and/or equipment operators will be present at the Facility when oil field waste is unloaded in order to check for unauthorized waste. In addition to the routine customer screening process, new customer oil field waste deliveries will receive focused supervision and scrutiny.

At a minimum, inspection personnel will be trained to identify suspicious wastes based on visual (and olfactory) characteristics in addition to the waste screening procedures outlined in Section 2.2 of this Plan. Specific items that will be on the training agenda include:

- Hazardous placarding or markings
- Proper form identification and use
- H₂S screening
- Non-exempt liquids recognition
- "Chemical" odors
- Excessive solids recognition
- Employee safety and personal protective equipment (PPE) use
- Site-generated waste handling and disposal

Whenever a suspicious waste is identified, Facility inspection personnel will follow specific procedures that may include:

- Identifying the unacceptable waste by characteristic, estimated quantity, transport vehicle, and the names and addresses of those associated with the waste load
- Questioning the driver of the vehicle
- Reviewing existing generator paperwork
- Contacting the possible source (i.e., generator) and questioning the originator of waste pursuant to the regulations.
- Denying access to the vehicle
- Calling the Division and/or Hazardous Waste Bureau, as applicable
- Using protective equipment
- Calling an emergency response agency, if required
- Contacting laboratory support, if necessary
- Document load refusal on C-138 (**Attachment II.2.A**)

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

**ATTACHMENT II.2.A
REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE
OCD FORM C-138**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-138
Revised August 1, 2011

*Surface Waste Management Facility Operator
and Generator shall maintain and make this
documentation available for Division inspection.

REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE

1. Generator Name and Address:

2. Originating Site:

3. Location of Material (Street Address, City, State or ULSTR):

4. Source and Description of Waste:

Estimated Volume yd³ / bbls Known Volume (to be entered by the operator at the end of the haul) yd³ / bbls

5. GENERATOR CERTIFICATION STATEMENT OF WASTE STATUS

I, , representative or authorized agent for do hereby
certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988
regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA Exempt: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-
exempt waste. *Operator Use Only: Waste Acceptance Frequency* ☐ Monthly ☐ Weekly ☐ Per Load

☐ RCRA Non-Exempt: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by
characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined in 40 CFR, part 261,
subpart D, as amended. The following documentation is attached to demonstrate the above-described waste is non-hazardous. (Check
the appropriate items)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide description in Box 4)

GENERATOR 19.15.36.15 WASTE TESTING CERTIFICATION STATEMENT FOR LANDFARMS

I, , representative for do hereby certify that
representative samples of the oil field waste have been subjected to the paint filter test and tested for chloride content and that the samples
have been found to conform to the specific requirements applicable to landfarms pursuant to Section 15 of 19.15.36 NMAC. The results
of the representative samples are attached to demonstrate the above-described waste conform to the requirements of Section 15 of
19.15.36 NMAC.

5. Transporter:

OCD Permitted Surface Waste Management Facility

Name and Facility Permit #:

Address of Facility:

Method of Treatment and/or Disposal:

☐ Evaporation ☐ Injection ☐ Treating Plant ☐ Landfarm ☐ Landfill ☐ Other

Waste Acceptance Status:

☐ APPROVED

☐ DENIED (Must Be Maintained As Permanent Record)

PRINT NAME:

TITLE:

DATE:

SIGNATURE: _____

TELEPHONE NO.:

Surface Waste Management Facility Authorized Agent

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

**ATTACHMENT II.2.B
AUTHORIZATION TO MOVE PRODUCED WATER
OCD FORM C-133**

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

AUTHORIZATION TO MOVE PRODUCED WATER

Transporter Name: _____

Business (Physical) Address in New Mexico:

Contact Mailing Address (If different):

Business Phone: _____

Contact Phone: _____

Business Fax: _____

Contact Fax: _____

1. Attach a copy of the applicant's New Mexico Public Regulation Commission (PRC) Warrant for Transportation Services.

2. Identify the form of the applicant's business entity: (Example: corporation, limited liability company [LLC], limited partnership, limited liability partnership, partnership, sole proprietor): _____

A. If the applicant is a corporation or LLC, provide the Secretary of State corporation number:

B. If the applicant is a limited partnership or limited liability partnership, provide the Secretary of State file number: _____

C. If the applicant is any other form of partnership, identify all partners:

D. If the applicant is a sole proprietor, provide the name of the sole proprietor:

(Note: If the form of your business entity changes, the name of your business changes, or the business address changes, you must re-apply for authorization.)

It is the responsibility of each holder of an approved Form C-133 to comply with 19.15.34 NMAC and familiarize its personnel with that rule's requirements. Failure to move or dispose of produced water in accordance with 19.15.34 NMAC may be cause for cancellation of the Form C-133.

"I hereby certify that the information above is true and complete to the best of my knowledge and belief." (Application must be signed by person who is authorized to obligate the company applying for the permit)

Signature: _____

Date: _____

Printed Name: _____

Title: _____

E-mail Address: _____

(This space for State use)

Approved by: _____

Title: _____

Date: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

**ATTACHMENT II.2.C
PAINT FILTER TEST PROTOCOL
USEPA METHOD 9095B**

METHOD 9095B

PAINT FILTER LIQUIDS TEST

1.0 SCOPE AND APPLICATION

1.1 This method is used to determine the presence of free liquids in a representative sample of waste.

1.2 The method is used to determine compliance with 40 CFR 264.314 and 265.314.

2.0 SUMMARY OF METHOD

2.1 A predetermined amount of material is placed in a paint filter. If any portion of the material passes through and drops from the filter within the 5-min test period, the material is deemed to contain free liquids.

3.0 INTERFERENCES

3.1 Filter media were observed to separate from the filter cone on exposure to alkaline materials. This development causes no problem if the sample is not disturbed.

3.2 Temperature can affect the test results if the test is performed below the freezing point of any liquid in the sample. Tests must be performed above the freezing point and can, but are not required to, exceed room temperature of 25 °C.

4.0 APPARATUS AND MATERIALS

4.1 Conical paint filter -- Mesh number 60 +/- 5% (fine meshed size). Available at local paint stores such as Sherwin-Williams and Glidden.

4.2 Glass funnel -- If the paint filter, with the waste, cannot sustain its weight on the ring stand, then a fluted glass funnel or glass funnel with a mouth large enough to allow at least 1 in. of the filter mesh to protrude should be used to support the filter. The funnel should be fluted or have a large open mouth in order to support the paint filter yet not interfere with the movement, to the graduated cylinder, of the liquid that passes through the filter mesh.

4.3 Ring stand and ring, or tripod.

4.4 Graduated cylinder or beaker -- 100-mL.

5.0 REAGENTS

5.1 None.

6.0 SAMPLE COLLECTION, PRESERVATION, AND HANDLING

A 100-mL or 100-g representative sample is required for the test. If it is not possible to obtain a sample of 100 mL or 100 g that is sufficiently representative of the waste, the analyst may use larger size samples in multiples of 100 mL or 100 g, i.e., 200, 300, 400 mL or g. However, when larger samples are used, analysts shall divide the sample into 100-mL or 100-g portions and test each portion separately. If any portion contains free liquids, the entire sample is considered to have free liquids. If the sample is measured volumetrically, then it should lack major air spaces or voids.

7.0 PROCEDURE

7.1 Assemble test apparatus as shown in Figure 1.

7.2 Place sample in the filter. A funnel may be used to provide support for the paint filter. If the sample is of such light bulk density that it overflows the filter, then the sides of the filter can be extended upward by taping filter paper to the inside of the filter and above the mesh. Settling the sample into the paint filter may be facilitated by lightly tapping the side of the filter as it is being filled.

7.3 In order to assure uniformity and standardization of the test, material such as sorbent pads or pillows which do not conform to the shape of the paint filter should be cut into small pieces and poured into the filter. Sample size reduction may be accomplished by cutting the sorbent material with scissors, shears, a knife, or other such device so as to preserve as much of the original integrity of the sorbent fabric as possible. Sorbents enclosed in a fabric should be mixed with the resultant fabric pieces. The particles to be tested should be reduced smaller than 1 cm (i.e., should be capable of passing through a 9.5 mm (0.375 inch) standard sieve). Grinding sorbent materials should be avoided as this may destroy the integrity of the sorbent and produce many "fine particles" which would normally not be present.

7.4 For brittle materials larger than 1 cm that do not conform to the filter, light crushing to reduce oversize particles is acceptable if it is not practical to cut the material. Materials such as clay, silica gel, and some polymers may fall into this category.

7.5 Allow sample to drain for 5 min into the graduated cylinder.

7.6 If any portion of the test material collects in the graduated cylinder in the 5-min period, then the material is deemed to contain free liquids for purposes of 40 CFR 264.314 and 265.314.

8.0 QUALITY CONTROL

8.1 Duplicate samples should be analyzed on a routine basis.


9.0 METHOD PERFORMANCE

9.1 No data provided.


10.0 REFERENCES

10.1 None provided.

FIGURE 1
PAINT FILTER TEST APPARATUS

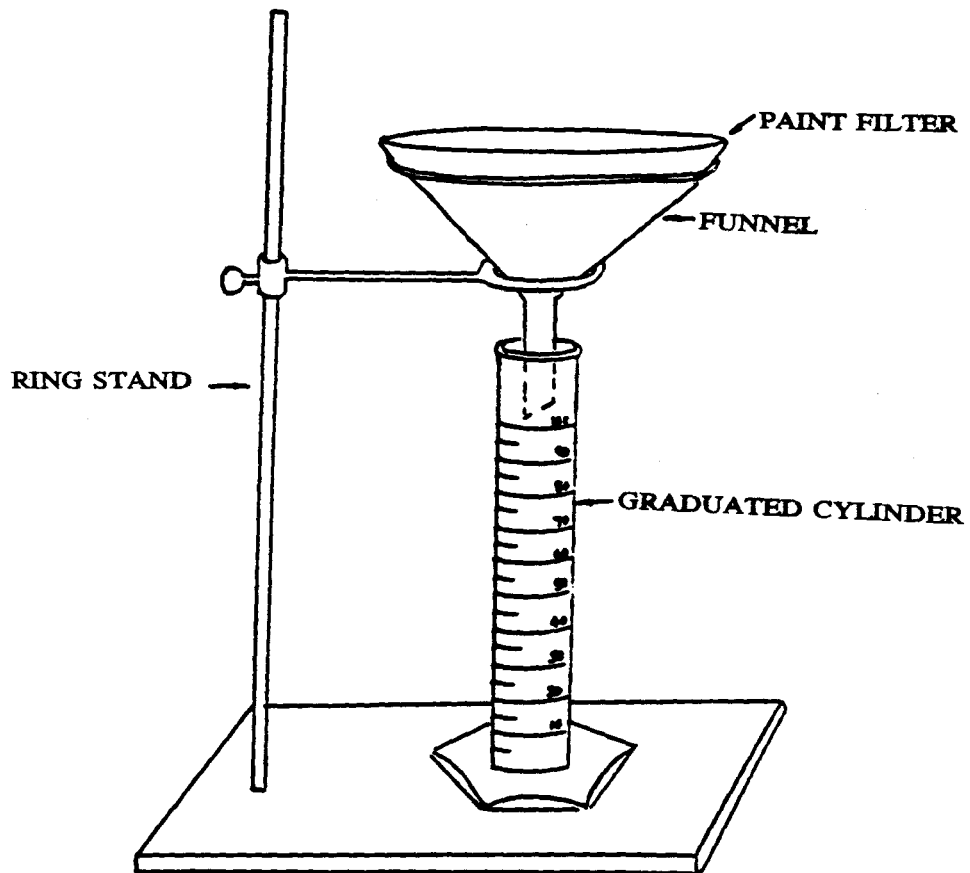

METHOD 9095B
PAINT FILTER LIQUIDS TEST

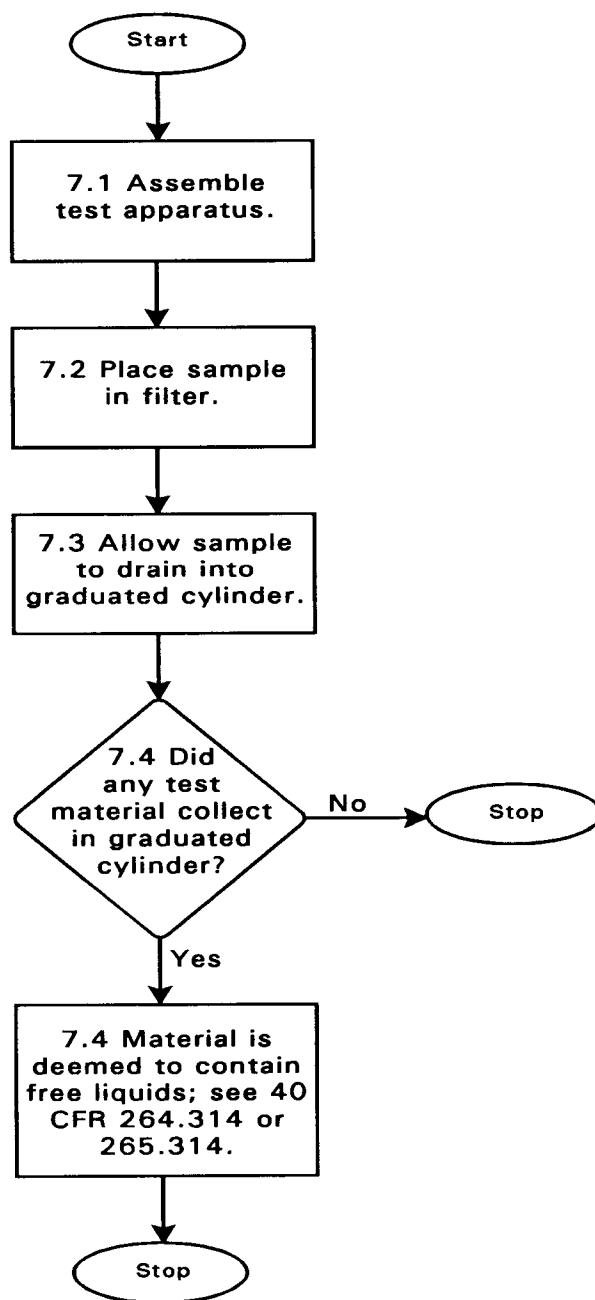

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

**ATTACHMENT II.2.D
DISPOSAL LOG (TYPICAL)**

ATTACHMENT II.2.D
Disposal Log (Typical)
DNCS Environmental Solutions

Lea County, NM
NMOCD # _____

Date: _____

Page _____ of _____

| Generator | Origin | Hauler | Soil (yards) | Mud (bbls) | Fluids (bbls) | Bottoms (bbls) | Cuttings (yards) | Washout | Sulfur (tons or bbls) | Trash (sales) | Disposal Location |
|-----------|--------|---------|-----------------|---------------|------------------|-------------------|---------------------|---------|--------------------------|------------------|----------------------|
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | Totals: | | | | | | | | | |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 2: OIL FIELD WASTE MANAGEMENT PLAN**

**ATTACHMENT II.2.E
OPERATOR'S MONTHLY REPORT
OCD FORM C-115**

District I
1625 North French, Hobbs, NM 88241

District II
1301 West Grand Avenue, Artesia, NM 88210

District III
1000 Rio Brazos, Aztec, NM 84710

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South Saint Francis Drive
Santa Fe, NM 87505
OPERATOR'S MONTHLY REPORT

Form C-115 First Page
Revised January 22, 2004
Instruction on Reverse Side
1 ☐ Amended Report

| | | | | | | | | | | | | | | | | |
|---|----------------------------|-------------|----------------|-----------------------------|---|---------------------------------------|------------------------------|------------------------------------|-----------------------------|-------------------------------|--|--|----------------------------|----------------------------|-----------------------------|--|
| 2 Operator | | | | | | | | | 3 OGRID: | | | | 4 Month/Year | | | |
| 5 Address: | | | | | | | | | | | | | 6 Page 1 of 4 | | | |
| | | INJECTION | | PRODUCTION | | | | DISPOSITION OF OIL, GAS, AND WATER | | | | | | | | |
| 7 Operator AND NAME No. and Name & U-L-S-T-R PI No. | 8 C O D E 1 | 9 Volume | 10 Pressure | 11 C O D E 2 | 12 Barrels of Oil/conden- sate produced | 13 Barrels of water produced | 14 MCF Gas Produced | 15 Days Prod- uced | 16 C O D E 3 | 17 Point of Disposition | 18 Gas BTU or Oil API Gravity | 19 Oil on hand at beginning of month | 20 Volume (Bbls/mcf) | 21 Transporter Ogrid | 22 C O D E 4 | 23 Oil on hand at end of month |
| | | | | | | | | | | | | | | | | |

I hereby certify that the information contained in this report is true and complete to the best of my knowledge.
24

| | | | | |
|-----------|----------------------|----------------|------|--------------|
| Signature | Printed Name & Title | E-mail Address | Date | Phone Number |
|-----------|----------------------|----------------|------|--------------|

| | | | | | | | | | | | | | | | | |
|---|----------------------------|-------------|----------------|-----------------------------|---|---------------------------------------|------------------------------|-----------------------------|------------------------------------|-------------------------------|--|--|----------------------------|----------------------------|-----------------------------|--|
| 2 Operator | | | | 3 OGRID | | | | 4 Month/Year | | | | 6 Page 4 of 4 | | | | |
| | | | | | | | | | | | | | | | | |
| | | INJECTION | | | PRODUCTION | | | | DISPOSITION OF OIL, GAS, AND WATER | | | | | | | |
| 7 WELL AND NAME No. and Name & U-L-S-T-R PI No. | 8 C O D E 1 | 9 Volume | 10 Pressure | 11 C O D E 2 | 12 Barrels of Oil/conden- sate produced | 13 Barrels of water produced | 14 MCF Gas Produced | 15 Days Prod- uced | 16 C O D E 3 | 17 Point of Disposition | 18 Gas BTU or Oil API Gravity | 19 Oil on hand at beginning of month | 20 Volume (Bbls/mcf) | 21 Transporter Ogrid | 22 C O D E 4 | 23 Oil on hand at end of month |
| | | | | | | | | | | | | | | | | |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-------------|
| 1.0 | INTRODUCTION | II.3-1 |
| 1.1 | Site Location | II.3-1 |
| 1.2 | Facility Description..... | II.3-1 |
| 1.3 | Purpose..... | II.3-4 |
| 1.4 | Hydrogen Sulfide Characteristics | II.3-6 |
| 1.5 | Regulatory Requirements: 19.15.36 NMAC and 19.15.11 NMAC..... | II.3-7 |
| 2.0 | Emergency Coordinators | II.3-9 |
| 3.0 | MONITORING..... | II.3-10 |
| 3.1 | Incoming loads..... | II.3-10 |
| 3.2 | Evaporation Pond Monitoring..... | II.3-12 |
| 4.0 | IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION | II.3-15 |
| 4.1 | Implementation | II.3-15 |
| 4.2 | Assessment..... | II.3-15 |
| 4.2.1 | Site Evacuation Plan | II.3-16 |
| 4.3 | Notification of Authorities and General Public | II.3-20 |
| 5.0 | EMERGENCY EQUIPMENT..... | II.3-22 |
| 5.1 | Internal Communications..... | II.3-22 |
| 5.2 | External Communications..... | II.3-23 |
| 5.3 | Personnel Protection, First Aid, and Safety Equipment | II.3-23 |
| 6.0 | RECORDKEEPING | II.3-23 |
| 7.0 | COORDINATION AGREEMENTS | II.3-24 |
| 8.0 | PLAN AMENDMENT | II.3-24 |
| 9.0 | TRAINING | II.3-25 |

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|--|-------------|
| II.3.1 | SITE LOCATION MAP | II.3-2 |
| II.3.2 | SITE PLAN..... | II.3-3 |
| II.3.3 | EVAPORATION POND STATIONARY MONITORING | II.3-13 |
| II.3.4 | SITE EVACUATION MAP | II.3-18 |
| II.3.5 | HOSPITAL LOCATION..... | II.3-19 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

LIST OF TABLES

| Table No. | Title | Page |
|------------------|---|-------------|
| II.3.1 | PROPOSED FACILITIES | II.3-4 |
| II.3.2 | EMERGENCY RESPONSE AGENCIES AND CONTACTS | II.3-5 |
| II.3.3 | H ₂ S EXPOSURE HEALTH RISK | II.3-6 |
| II.3.4 | API RECOMMENDED PRACTICE 55 | II.3-8 |
| II.3.5 | LIST OF EMERGENCY COORDINATORS | II.3-9 |
| II.3.6 | H ₂ S TREATMENT FOR VEHICLES | II.3-11 |
| II.3.7 | IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION PROCEDURES FOR H ₂ S | II.3-14 |
| II.3.8 | PART 29 RELEASE NOTIFICATION | II.3-17 |
| II.3.9 | EVACUATION PROCEDURES | II.3-20 |
| II.3.10 | EMERGENCY RESPONSE EQUIPMENT LIST | II.3-22 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| II.3.A | MATERIAL SAFETY DATA SHEET FOR H ₂ S |
| II.3.B | REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE, OCD FORM C-138 |
| II.3.C | DAILY AIR AND WATER INSPECTION REPORT FORM H ₂ S MONITOR (TYPICAL) |
| II.3.D | INCIDENT REPORT FORM (TYPICAL) |
| II.3.E | RELEASE NOTIFICATION AND CORRECTIVE ACTION OCD FORM C-141 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre ± tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.3.1**). Site access will be provided via the south side of NM 529.

1.2 Facility Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components, a liquid oil field waste Processing Area (177 acres ±), and an oil field waste Landfill (318 acres ±). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Plan provided as **Figure II.3.2** identifies the locations of the Processing Area and Landfill facilities. The proposed facilities are detailed in **Table II.3.1**, and are planned to be developed in four primary phases.

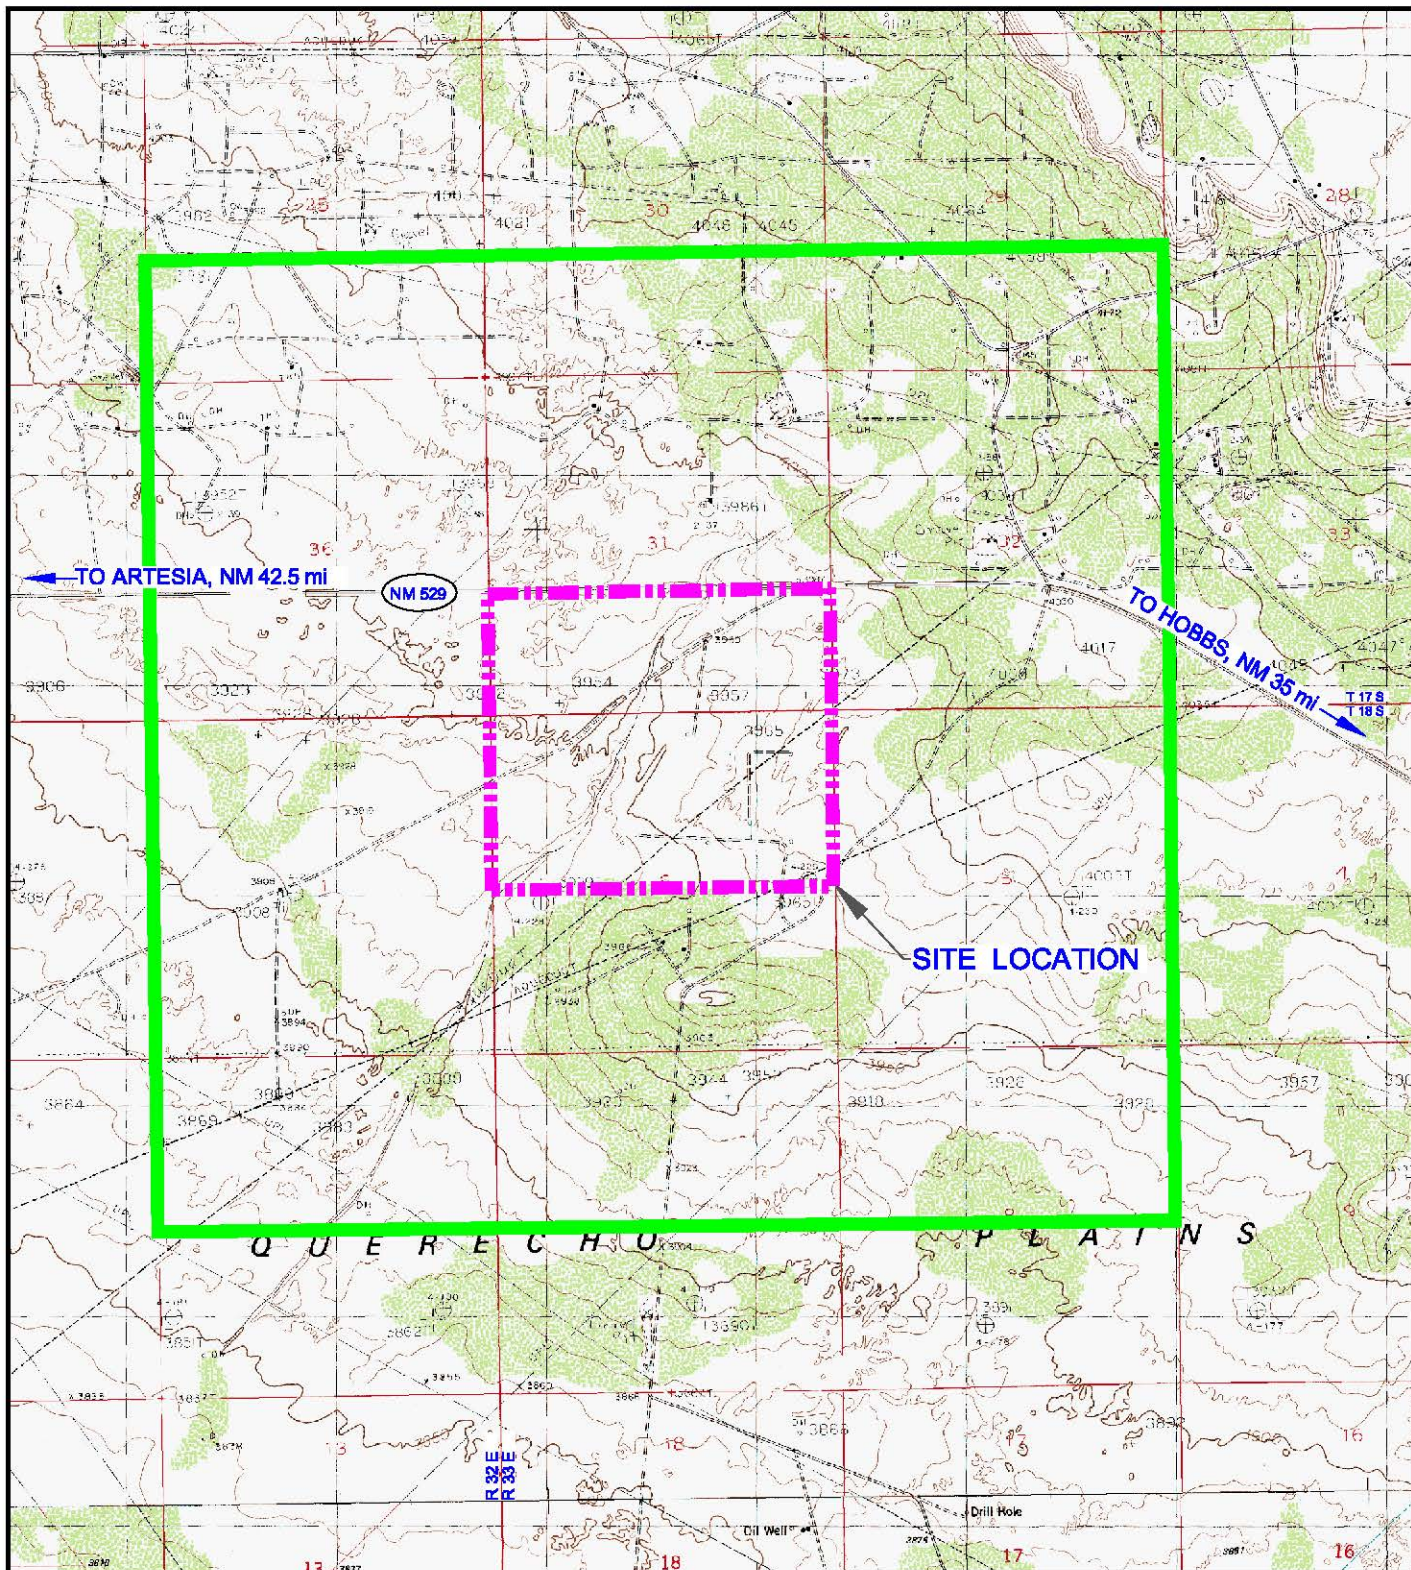


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 13, 2014-07:13:02 ; LAYOUT: A(P)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.3.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

TABLE II.3.1
Proposed Facilities¹
DNCS Environmental Solutions

| Description | No. |
|---------------------------------------|------------|
| Oil field waste disposal landfill | 1 |
| Produced water load-out points | 9 |
| Produced water receiving tanks | 12 |
| Produced water settling tanks | 48 |
| Mechanical oil/water separation unit | 4 |
| Evaporation ponds | 12 |
| Stabilization and Solidification Area | 1 |
| Oil treatment plant | 1 |
| Crude oil receiving tanks | 5 |
| Oil sales tanks | 5 |
| Customer jet wash | 1 (6 bays) |

Note:

¹*Subject to change. The proposed facilities are based on projected waste types and volumes; therefore this list may be modified in response to changes in waste streams, technology, etc.*

1.3 Purpose

The purpose of this Hydrogen Sulfide (H₂S) Prevention and Contingency Plan (the Plan) is to enhance awareness and establish measures to protect employees from occupational exposure to H₂S while allowing them to perform their assigned duties. The Plan is also designed to protect customers and visitors to the DNCS Facility, as well as the general public and nearby land users.

This Plan prescribes measures for:

- Providing routine H₂S monitoring of incoming wastes.
- Installation of monitoring points at the Facility evaporation ponds.
- Routine perimeter monitoring, and the potential for permanent monitoring stations.
- Regular monitoring in and around incoming oil field waste transportation vehicles.
- Augmenting the monitoring procedures in the event that H₂S is detected in excess of 10 parts per million (ppm).

DNCS will invite the local emergency response authorities identified in **Table II.3.2** to the site for a briefing on this Plan. During this briefing, DNCS will discuss notification, emergency response procedures, and evacuation plans. The H₂S monitoring program will be implemented during the active life of the Facility.

TABLE II.3.2
Emergency Response Agencies and Contacts
DNCS Environmental Solutions

| Agency/Organization | Emergency Number |
|---|-------------------------|
| 1. Fire | |
| Maljamar Fire Department | 911 or (575) 676-4100 |
| 2. Police | |
| Lea County Sheriff's Department | 911 or (575) 396-3611 |
| New Mexico State Police | 911 or (575) 392-5580 |
| 3. Medical/Ambulance | |
| Lea County EMS | 911 |
| Lea Regional Medical Center | (575) 492-5000 |
| 5419 N. Lovington Highway | |
| Hobbs, NM 88240 | |
| 4. Response Firm | |
| Phoenix Environmental, LLC. | (575) 391-9685 |
| 2113 N French Drive | |
| Hobbs, NM 88240 | |
| 5. OCD Emergency Response Contacts | |
| Oil Conservation Division | (575) 393-6161 |
| 1625 N. French Drive | |
| Hobbs, NM 88240 | |
| Mobile Phone | (575) 370-3180 |
| Oil Conservation Division | (505) 476-3440 |
| 1220 South St. Francis Drive | |
| Santa Fe, NM 87505 | |
| 6. State Emergency Response Contacts | |
| Environmental Emergency 24 hr. (NMED) | (505) 827-9329 |
| New Mexico Environment Department | (505) 827-0197 |
| Solid Waste Bureau, Santa Fe | |
| 7. Local Emergency Response Contacts | |
| Lea County Emergency Management | (575) 391-2983 |
| 8. Federal Emergency Response Contacts | |
| National Emergency Response Center | |
| (U.S. Coast Guard) | (800) 424-8802 |
| Region VI Emergency Response Hotline | |
| (USEPA) | (214) 665-2200 |

1.4 Hydrogen Sulfide Characteristics

H₂S is a colorless and flammable gas with a distinct odor. Being heavier than air, H₂S tends to accumulate at the floor of poorly ventilated spaces. It is found in petroleum and natural gas and is sometimes present in groundwater. The odor of hydrogen sulfide gas can be perceived at levels as low as 10 parts per billion (ppb). At levels of 50-100 ppm, it may cause the human sense of smell to fail. Limited exposure to low concentrations of H₂S can result in eye irritation, sore throat, coughing, shortness of breath, and fluid in the lungs. These symptoms usually recede in a few weeks in the absence of continued exposure. Long-term, low-level exposure may result in fatigue, loss of appetite, headaches, irritability, poor memory, and dizziness. Exposure to high concentrations of H₂S can lead to eye damage, loss of sense of smell, pulmonary edema (swelling and/or fluid accumulation in the lungs), loss of breathing and death. General risks associated with H₂S contact are summarized on **Table II.3.3**, and more detailed chemical hazard information for H₂S is provided on the material safety data sheet (MSDS) furnished in **Attachment II.3.A**.

TABLE II.3.3
H₂S Exposure Health Risk
DNCS Environmental Solutions

| H₂S EXPOSURE LEVEL¹ | HEALTH RISK |
|--|---|
| Low (0-10 ppm) | Eye, nose, and throat irritation; coughing, shortness of breath, fluid in the lungs |
| Moderate (10-50 ppm) | Headache, dizziness, nausea and vomiting, coughing and breathing difficulty, loss of sense of smell |
| High (50-200 ppm) ² | Severe respiratory tract irritation, loss of sense of smell, eye damage, shock, convulsions, coma, pulmonary edema (swelling and/or fluid accumulation in the lungs), death |

¹General data obtained from www.safetydirectory.com

²NIOSH Immediate Danger to Life or Health (IDLH) is 100 ppm

The oil field waste types, and engineering design and operating procedures specific to the DNCS Facility, will mitigate against the potential release of H₂S in to the environment. The measures deployed by DNCS that minimize the potential generation of releases include:

- Screening of existing and new deliveries
- Load inspections for the presence of H₂S as outlined in the Oil Field Waste Management Plan (**Volume II.2**)

- Onsite H₂S treatment of incoming loads to ensure that the acceptance criteria of no measurable H₂S (< 1 ppm) is met
- Constant evaporation pond testing
- Employee training

The cornerstone of this Plan consists of routine H₂S monitoring conducted for the Facility evaporation ponds and incoming waste streams to ensure that the regulatory limits for H₂S are not exceeded. The monitoring is intended to confirm that the H₂S concentration being accepted at the Facility is less than 1 ppm. This approach to monitoring and treatment has proven effective in reducing H₂S concentrations and successful in eliminating the need for H₂S Contingency Plan implementation as described in 19.15.11.9 NMAC (i.e., to address H₂S > 100 ppm). In addition, this Plan follows American Petroleum Institute (API) Recommended Practice 55 (RP-55), paragraph 7.6 to address H₂S >30 ppm (**Table II.3.4**).

1.5 Regulatory Requirements: 19.15.36 NMAC and 19.15.11 NMAC

The Rules for Surface Waste Management Facilities (19.15.36 NMAC) address the monitoring and management of H₂S in 19.15.36.8.C.(8):

19.15.36.8 SURFACE WASTE MANAGEMENT FACILITY PERMITS AND APPLICATION REQUIREMENTS

C. Application requirements for new facilities, major modifications and permit renewals. An applicant or operator shall file an application, form C-137, for a permit for a new surface waste management facility, to modify an existing surface waste management facility or for permit renewal with the environmental bureau in the division's Santa Fe office. The application shall include:

- (8) a hydrogen sulfide prevention and contingency plan that complies with those provisions of 19.15.11 NMAC that apply to surface waste management facilities;*

Additionally, this H₂S monitoring program is intended to demonstrate compliance with 19.15.36.8.C.(8) NMAC (Surface Waste Management), and the requirements of 19.15.11 NMAC (Hydrogen Sulfide Gas), as well as, other permit conditions that may apply to this Facility. Should monitoring results identify unexpected concentrations of H₂S in excess of 100 ppm (RP-55 limit = 30 ppm) in a public area, the requirements of 19.15.11.8.C NMAC will be implemented and this Plan, developed specifically to be responsive to 19.15.11.9 NMAC, will be implemented as required with proper notification.

TABLE II.3.4
API Recommended Practice 55
DNCS Environmental Solutions

7.6 IMMEDIATE ACTION PLAN

Each contingency plan should contain a condensed “Immediate Action Plan” to be followed by designated personnel any time they receive notice of a potentially hazardous hydrogen sulfide or sulfur dioxide discharge. For the protection of personnel (including the general public) and abatement of the discharge, this “Immediate Action Plan” should include, but not be limited to, the following provisions:

- a. Alert and account for facility personnel.
 1. Move away from the hydrogen sulfide or sulfur dioxide source and get out of the affected area.
 2. Don proper personal breathing equipment.
 3. Alert other affected personnel.
 4. Assist personnel in distress.
 5. Proceed to the designated emergency assembly area.
 6. Account for on-site personnel.
- b. Take immediate measures to control the present or potential hydrogen sulfide or sulfur dioxide discharge and to eliminate possible ignition sources. Emergency shutdown procedures should be initiated as deemed necessary to correct or control the specific situation. When the required action cannot be accomplished in time to prevent exposing operating personnel or the public to hazardous concentrations of hydrogen sulfide or sulfur dioxide, proceed to the following steps, as appropriate for the site specific conditions.
- c. Alert the public (directly or through appropriate government agencies) that may be subjected to an atmosphere exposure exceeding 30 ppm²¹ of hydrogen sulfide or 10²¹ ppm of sulfur dioxide.
- d. Initiate evacuation operations.
- e. Contact the first available designated supervisor on the call list (refer to Par. 7.4.a). Notify the supervisor of circumstances and whether or not immediate assistance is needed. The supervisor should notify (or arrange for notification of) other supervisors and other appropriate personnel (including public officials) on the call list.
- f. Make recommendations to public officials regarding blocking unauthorized access to the unsafe area and assist as appropriate.
- g. Make recommendations to public officials regarding evacuating the public and assist as appropriate.
- h. Notify, as required, state and local officials and the National Response Center to comply with release reporting requirements (i.e., 40 *Code of Federal Regulations Parts 302 and 355*) (refer to Par. 4.4).
- i. Monitor the ambient air in the area of exposure (after following abatement measures) to determine when it is safe for re-entry.

²¹Emergency Response Planning Guide Level 2 (ERPG-2), refer to Reference 27. ERPG-2 is defined as the maximum airborne concentration below which it is believed that nearly all individuals could be exposed for up to one hour without experiencing or developing irreversible or other serious health effects or symptoms that could impair an individual’s ability to take protective action.

Note: This sequence (Par. 7.6) should be altered to fit the prevailing situation. Certain actions, especially those dealing with the public, should be coordinated with public officials.

This Table is extracted from the American Petroleum Institute (API) Recommended Practices for Oil and Gas Producing and Gas Processing Plant Operations Involving Hydrogen Sulfide, Recommended Practice 55, Second Edition, February 15, 1995

2.0 EMERGENCY COORDINATORS

DNCS has designated individual specialists with the responsibility and authority to implement response measures in the event of an emergency which threatens freshwater, public health, safety or the environment per 19.15.36.13.N.(3) NMAC. The Primary, Alternate, and on-site Emergency Coordinators (ECs; **Table II.3.5**) will be thoroughly familiar with all aspects of this Plan; operations and activities at the Facility; location and characteristics of waste to be managed; the repository of all records within the Facility; and the Facility layout. **Table II.3.5** provides a list of names, designations, titles, and phone numbers for each EC, who will be formally identified to OCD prior to commencing Facility operations.

TABLE II.3.5
List of Emergency Coordinators*
DNCS Environmental Solutions

Primary Emergency Coordinator

| | |
|--------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Manager</u> | Mobile Phone: <u>(575) TBD</u> |

Alternate Emergency Coordinator

| | |
|---------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Operator</u> | Mobile Phone: <u>(575) TBD</u> |

Onsite Emergency Coordinator

| | |
|---------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Operator</u> | Mobile Phone: <u>(575) TBD</u> |

**To be determined (TBD)*

The ECs are responsible for coordinating emergency response measures and have the authority to commit the resources required for implementation of this Plan. A designated EC will be available to respond to emergencies 24 hours a day, 7 days a week. The DNCS employee who identifies an emergency situation will contact an EC directly; or via phone or radio. Contact will be attempted with each EC (Primary, Alternate, and the On-site) until communication is achieved (**Table II.3.5**). Upon arrival at the scene of an emergency, the first EC to arrive will assume responsibility for initiating response measures. If more than one EC responds, authority is assigned to the highest-ranking EC.

In the rare case that an EC cannot be contacted in an emergency, the DNCS employee who identifies the emergency will make every effort to follow the emergency procedures outlined in this Plan until an EC or emergency authority (local, state, or federal; **Table II.3.2**) arrives to assist or take charge. The term “EC” as used throughout this Plan to references the responsible Emergency Coordinator at the scene of an emergency regardless of whether that EC is the Primary, Alternate, On-site EC, or EC designee. This Plan will be amended as described in Section 8.0 if the list of ECs changes, with updates submitted in a timely manner to OCD and filed on-site.

3.0 MONITORING

3.1 Incoming loads

DNCS will monitor for H₂S on a continual basis on every oil field delivery waste vehicle arriving at the site, as described in the Oil Field Waste Management Plan (**Volume II.2**). Monitoring results will be recorded on the OCD Form C-138 under “Source and Description of Waste” (**Attachment II.3.B**) and retained as part of the Facility Operating Record. DNCS personnel will wear H₂S personal monitors under circumstances where H₂S may be present, including when they are testing or unloading materials that may contain H₂S. The monitors will issue a visual and audible signal at 10 ppm of H₂S in the ambient air that becomes more rapid at 20 ppm. In the event of an H₂S detection of 10 ppm or greater, the following procedures will be implemented:

- Notification of the presence of H₂S will be provided to both the driver (hauler) and the generator.
- The generator will be provided the option of allowing DNCS to treat the load on-site. Should the generator decline treatment, the load will be rejected and directed to leave the DNCS Facility.
- If the generator requests treatment, DNCS personnel will add calcium hypochlorite (Ca(ClO)₂) to the load at the levels corresponding to **Table II.3.6**.
- Once the Ca(ClO)₂ has been added, the load will be “rolled” (i.e., trucks will use their air pumps to “roll” air through the tank to allow for mixing of the contents and the added Ca(ClO)₂ to assist the chemical reaction. After approximately 20 minutes, the load will be re-sampled for the presence of H₂S. Treatment will continue until the H₂S reading is below 1 ppm. Once the H₂S measurement reads below 1 ppm, the load will be directed to the receiving area for processing.

TABLE II.3.6
H₂S Treatment for Vehicles ¹
DNCS Environmental Solutions

| H₂S PPM² | Ca(ClO)₂ “Coffee Cans” Required³ |
|---------------------------------------|---|
| <50 | 1.0 |
| 50-100 | 1.5 |
| 100-150 | 2.0 |
| 150-200 | 2.5 |
| 200-250 | 3.0 |
| 250-300 | 3.5 |
| 300-350 | 4.0 |
| 350-400 | 4.5 |
| 400-450 | 5.0 |
| 450-500 | 5.5 |
| 500-550 | 6.0 |
| 550-600 | 6.5 |
| 600-650 | 7.0 |
| 650-700 | 7.5 |
| 700-750 | 8.0 |
| 750-800 | 8.5 |
| 800-850 | 9.0 |
| 850-900 | 9.5 |
| 900-950 | 10.0 |
| 950-1000 | 10.5 |

Notes:

¹Typical volume of truck is 80 bbl. One coffee can equals 34.5 oz of product.

²PPM = parts per million

³Ca(ClO)₂ = calcium hypochlorite

- Treatment information and the final H₂S measurement will be recorded on the OCD Form C-138 under “Source and Description of Waste” (**Attachment II.3.B**).
- DNCS personnel will contact the generator’s Plant Manager or General Manager if assistance is needed.

3.2 Evaporation Pond Monitoring

3.2.1 Stationary Monitors

Evaporation ponds will be monitored for the presence of H₂S by recording at continuous monitors maintained along the outside perimeter of the pond area as shown on **Figure II.3.3**. These monitors will be wired directly to the office for remote observation. H₂S readings and wind speed/direction will be logged and recorded twice daily on the DNCS Daily Air and Water Inspection Form (**Attachment II.3.C**). The EC will be notified, and will implement the procedures outlined below if H₂S readings are ≥ 10 ppm. If H₂S readings are ≥ 20 ppm, the employee will implement the procedures listed in **Table II.3.7**.

- A second reading will be taken on the downwind berm within one hour
- The dissolved oxygen and dissolved sulfide levels of the pond will be tested immediately and the need for immediate treatment determined
- Tests for H₂S levels will be made at the fenceline downwind from the area of concern

If two (2) consecutive H₂S readings of 10 ppm or greater are recorded:

- The EC will notify the Hobbs office of the OCD immediately (**Table II.3.2**)
- DNCS will commence hourly monitoring on a 24-hour basis
- DNCS will lower the pond level so that the mechanical evaporation system will circulate the entire pond
- DNCS will obtain daily analysis of dissolved sulfides in the pond

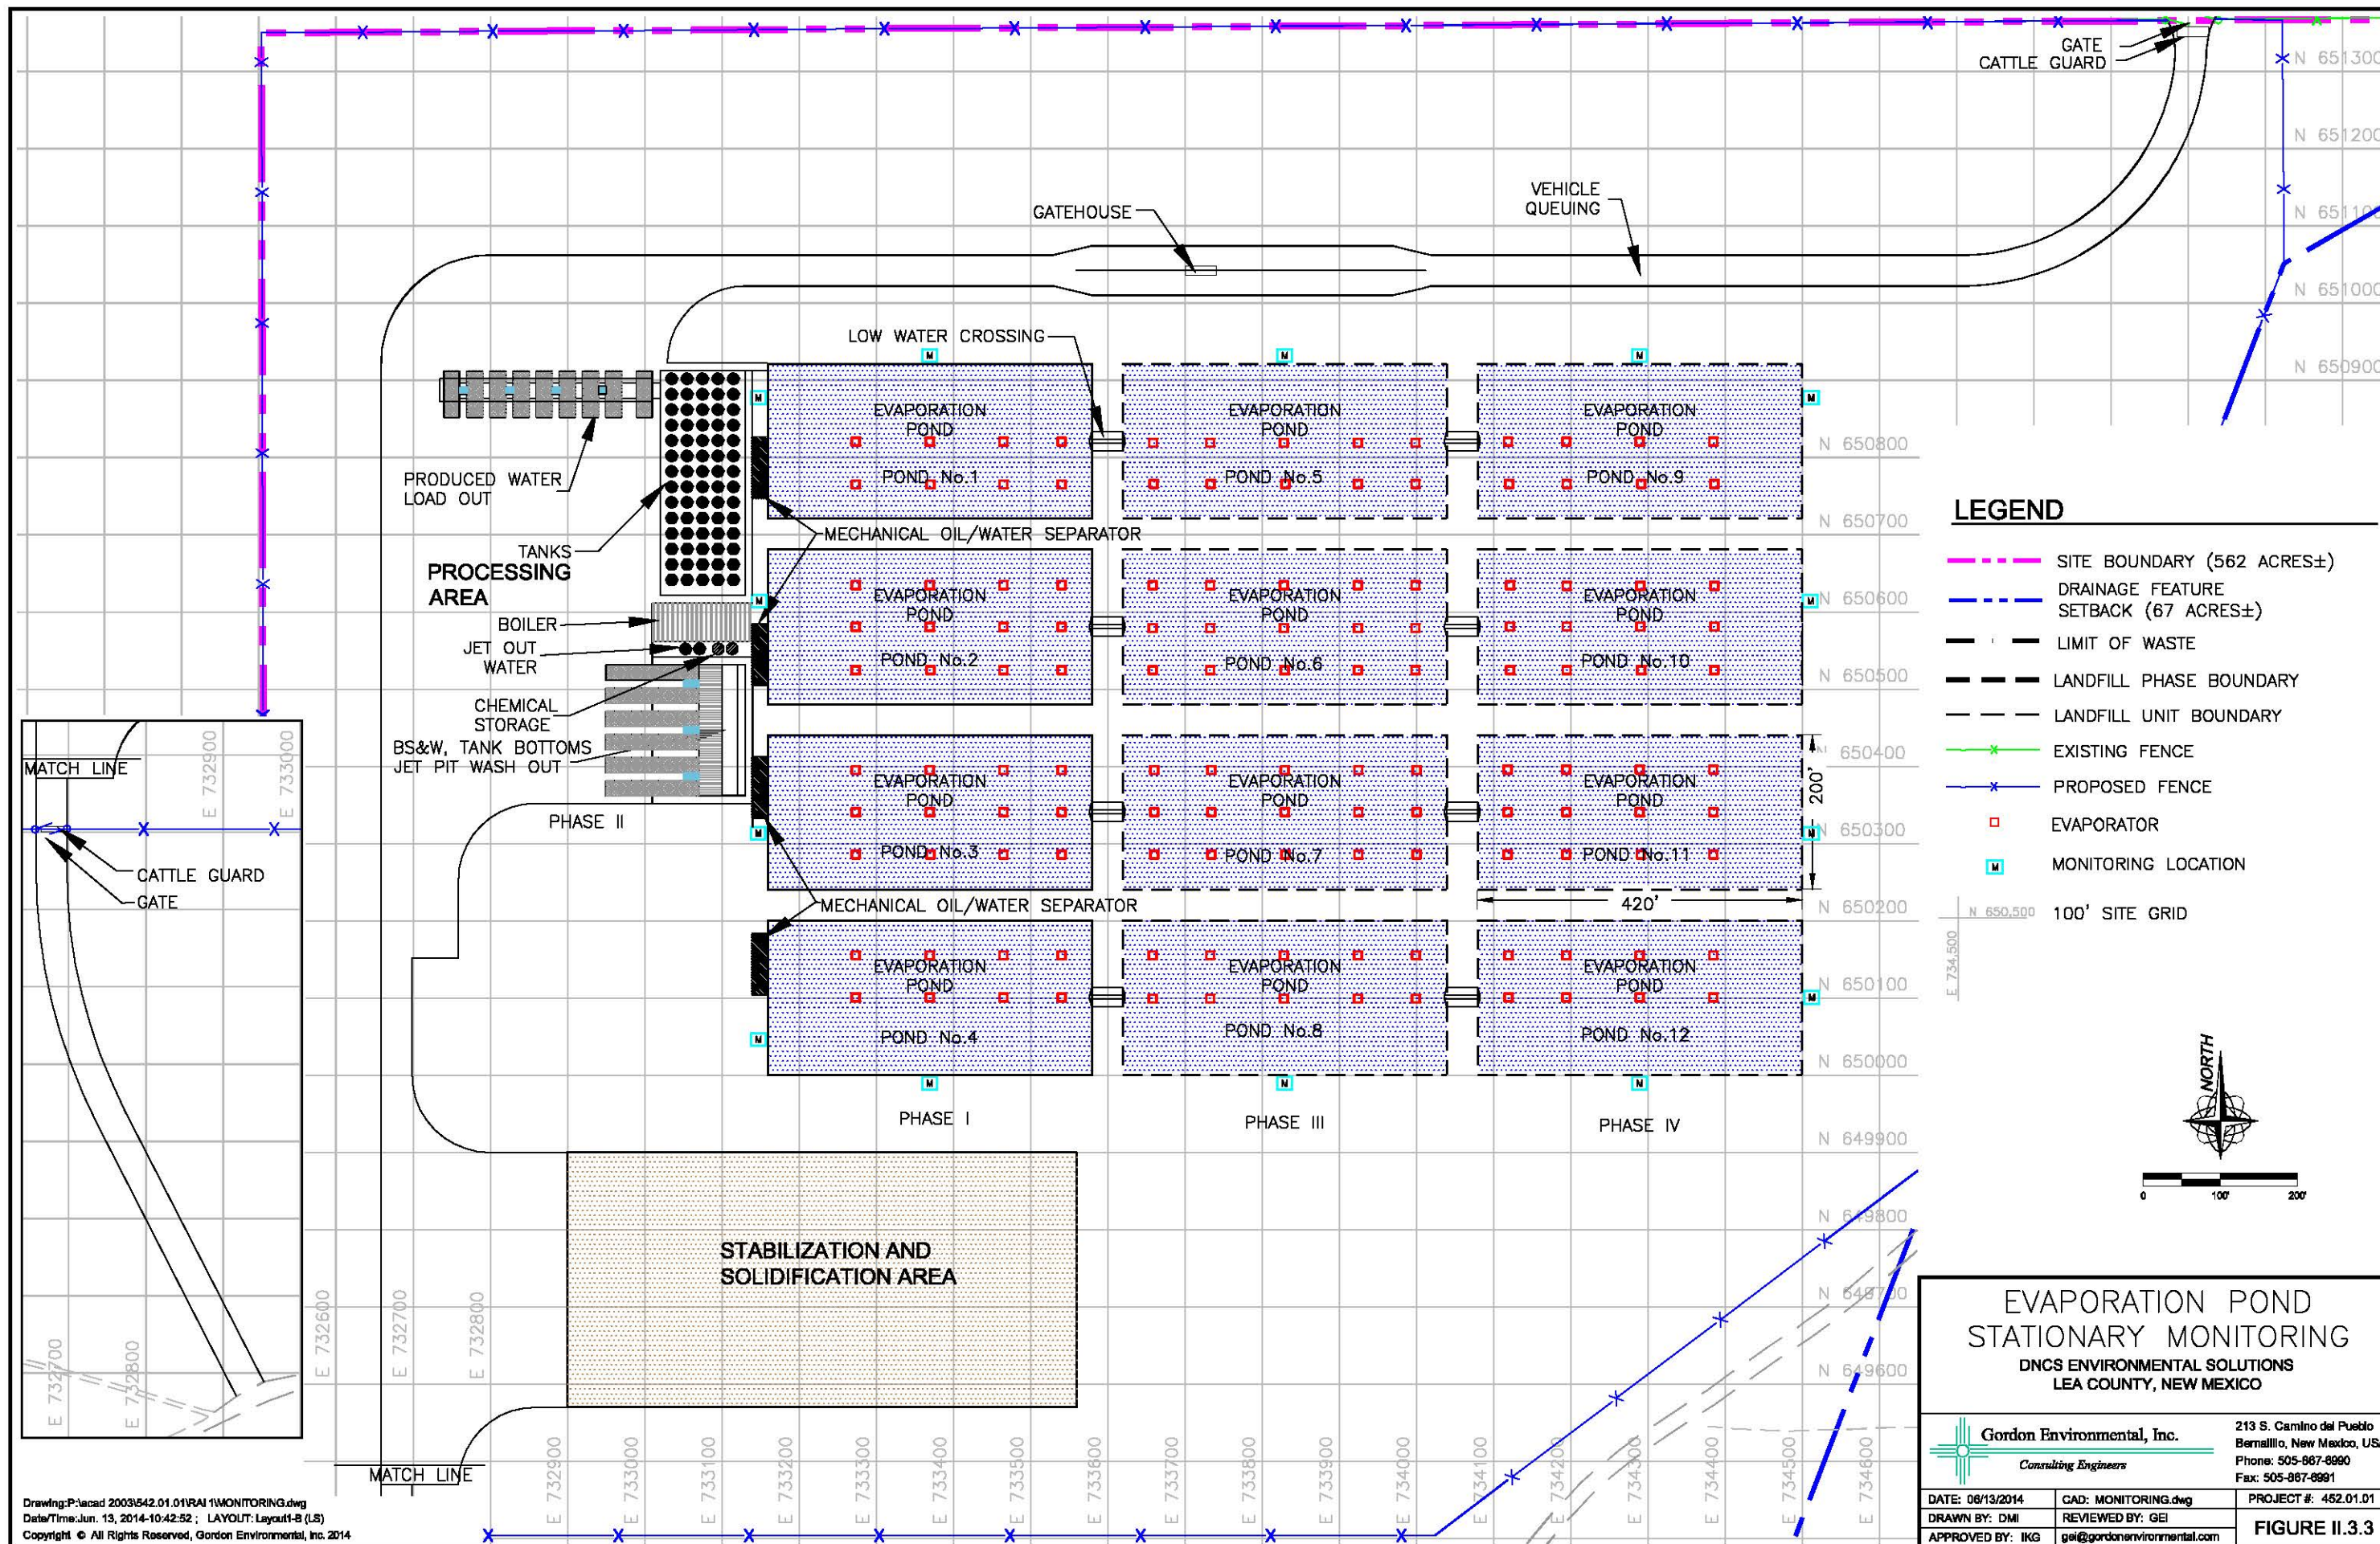


TABLE II.3.7
Implementation, Assessment, and Notification Procedures for H₂S
DNCS Environmental Solutions

1. **EVACUATE AREA AND NOTIFY THE ECs:** The employee who first becomes aware of the H₂S alarm will immediately evacuate the area, don protective personal breathing equipment and notify the Primary EC, and the Alternate EC and On-site EC if necessary. Notification will be made in person, via telephone, or via radio. The responding EC will assume full authority over the situation. Properly protected responders will then assist any affected personnel or customers.
2. **REMAIN UPWIND OF RELEASE:** Persons evacuated from the release area should remain away and upwind from the area of the release until an assessment of the conditions has been made.
3. **ASSESS THE AMOUNT OF RELEASE:** The EC will assess the source, severity, and extent of the alarm. Monitoring equipment will be operated by trained personnel.
4. **MONITOR DOWNWIND IF H₂S ≥ 10 PPM:** In the event a reading of 10 ppm is registered, the area will be evacuated and Facility personnel will monitor the H₂S levels along the downwind boundary of the Facility.
5. **EVACUATE AND CLOSE THE FACILITY IF H₂S ≥ 20 PPM AT DOWNWIND BOUNDARY:** If levels reach 20 ppm at the downwind boundary, the Facility will be evacuated and closed. Evacuation procedures are enumerated the Site Evacuation Plan provided as **Figure II.3.4**. Additionally, DNCS will notify all persons within one-half mile of the fence line. (No residents are currently within one-half mile.)
6. **NOTIFICATION OF AUTHORITIES:** Notification will be provided to the New Mexico State Police, Lea County Sheriff, Lea County Emergency Management, and OCD (**Table II.3.1**). In addition, medical authorities will be contacted if needed. DNCS will also notify Phoenix Environmental (if necessary) in Hobbs (**Table II.3.1**) to provide response personnel, equipment, and supplies to mitigate the source of an H₂S reading of ≥10 ppm.
7. **RECORDKEEPING:** DNCS will log and report to the OCD all incidences where an H₂S reading of ≥10 ppm is registered at the ponds (also see Section 6.0). Records will be maintained for at least 5 years at the DNCS administrative offices.

3.2.2 Dissolved Oxygen and pH Monitoring

Dissolved oxygen and pH levels are key indicators of the efficacy of treatment and removal of H₂S during the aeration process in the evaporation ponds. The chemical reaction of H₂S and oxygen to produce sulfate as an end product is dependent upon the level of both dissolved oxygen and pH. Daily tests will be conducted and records made for each pond. If the pH falls below 8.0, remedial steps will be taken immediately to raise the pH. DNCS proposes to use

sodium hydroxide (caustic agent) to raise the pH to the optimal level of 8.2-9.0. Dissolved oxygen levels will be tested on a daily basis to ensure a residual of 0.5 ppm is maintained. The dissolved oxygen level will be taken at the beginning of each day (or at least once per 24-hour period), one foot off the bottom of each pond at various locations and recorded. If any tests show a dissolved residual oxygen level of less than 0.5 ppm, immediate steps will be undertaken to oxygenate the pond and create a residual oxygen level within the pond of at least 0.5 ppm. Remedial measures may include addition of chemicals or increased aeration. The pH readings will be recorded daily on the Daily Air and Water Inspection Form (**Attachment II.3.C**).

4.0 IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION

The following subsections present a series of procedures for implementation, assessment, and notification of appropriate authorities in the unlikely event that a H₂S emergency develops (19.15.11.9 NMAC).

4.1 Implementation

This H₂S Contingency Plan will be implemented when an imminent or actual emergency situation develops that represents a potential impact to fresh water, public health, safety or the environment. The circumstances that could require implementation of this Plan includes the release of H₂S gas.

Table II.3.7 lists the implementation, assessment, and notification procedures that will be followed in the event of an emergency. Assessment and notification are discussed further in Sections 4.2 and 4.3.

4.2 Assessment

In the event of a release, the EC will immediately identify the character, source, amount and extent of released materials, if possible; as well as assess the potential impact to fresh water, public health, safety or the environment. During an emergency, the EC may amend this Plan, as necessary, to protect fresh water, public health, safety or the environment (19.15.11.9.F NMAC). The EC will also assess the circumstances of an emergency situation and determine the responses required to:

- provide notifications to appropriate agencies and the general public
- implement appropriate response and recordkeeping procedures

The assessment provides the EC with critical data needed to determine whether an evacuation is necessary, whether emergency authorities should be contacted, and whether DNCS should attempt to control the release with on-site personnel and equipment. **Table II.3.8** provides OCD descriptions of “major” and “minor” releases which are applicable for assessment purposes (19.15.29.7 – 11 NMAC). This section contains additional, detailed information regarding the Site Evacuation Plan, and Section 5.0 addresses control procedures.

4.2.1 Site Evacuation Plan

Based upon the type of waste materials and treatment received at DNCS, the potential for a Facility evacuation is unlikely (19.15.11.9.B.(2)(a) NMAC). However, various circumstances could arise warranting a Facility evacuation. In an emergency situation, the EC is the individual responsible for determining when evacuation of the Facility is required. Imminent or actual dangers that constitute a situation that could require evacuation include:

- Detection of H₂S levels at ≥ 10 ppm (evacuate the immediate area and monitor downwind levels)
- Detection of H₂S levels at ≥ 20 ppm (evacuate and close the Facility)

When conditions warrant immediate evacuation (e.g., H₂S ≥ 20 ppm), on-site persons (e.g., Facility personnel, haulers, visitors, vendors, etc.) will be directed to proceed immediately to the Processing Area Gatehouse or the Landfill Scalehouse (as applicable) to evacuate through the main gates (**Figure II.3.4**), the primary evacuation route. DNCS Personnel will exercise good judgment and common sense in using the primary evacuation route to exit the Facility, or selecting the most appropriate alternative evacuation route, if necessary. Assembly points and primary/secondary evacuation routes are provided on **Figure II.3.4**. Driving directions to the nearest hospital are included as **Figure II.3.5**, and **Table II.3.9** provides detailed procedures for evacuating the Facility.

TABLE II.3.8
Part 29: Release Notification
DNCS Environmental Solutions

19.15.29.7 DEFINITIONS:

- A.** "Major release" means:
- (1)** an unauthorized release of a volume, excluding gases, in excess of 25 barrels;
 - (2)** an unauthorized release of a volume that:
 - (a)** results in a fire;
 - (b)** will reach a watercourse;
 - (c)** may with reasonable probability endanger public health; or
 - (d)** results in substantial damage to property or the environment;
 - (3)** an unauthorized release of gases in excess of 500 MCF; or
 - (4)** a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC.
- B.** "Minor release" means an unauthorized release of a volume, greater than five barrels but not more than 25 barrels; or greater than 50 MCF but less than 500 MCF of gases.

19.15.29.8 RELEASE NOTIFICATION:

- A.** The person operating or controlling either the release or the location of the release shall notify the division of unauthorized release occurring during the drilling, producing, storing, disposing, injecting, transporting, servicing or processing of oil, gases, produced water, condensate or oil field waste including regulated NORM, or other oil field related chemicals, contaminants or mixture of the chemicals or contaminants, in accordance with the requirements of 19.15.29 NMAC.
- B.** The person operating or controlling either the release or the location of the release shall notify the division in accordance with 19.15.29 NMAC with respect to a release from a facility of oil or other water contaminant, in such quantity as may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC.


19.15.29.9 REPORTING REQUIREMENTS: The person operating or controlling either the release or the location of the release shall provide notification of releases in 19.15.29.8 NMAC as follows.


- A.** The person shall report a major release by giving both immediate verbal notice and timely written notice pursuant to Subsections A and B of 19.15.29.10 NMAC.
- B.** The person shall report a minor release by giving timely written notice pursuant to Subsection B of 19.15.29.10 NMAC.

19.15.29.10 CONTENTS OF NOTIFICATION:

- A.** The person operating or controlling either the release or the location of the release shall provide immediate verbal notification within 24 hours of discovery to the division district office for the area within which the release takes place. In addition, the person shall provide immediate verbal notification of a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC to the division's environmental bureau chief. The notification shall provide the information required on form C-141.
- B.** The person operating or controlling either the release or the location of the release shall provide timely written notification within 15 days to the division district office for the area within which the release occurs by completing and filing form C-141. In addition, the person shall provide timely written notification of a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC to the division's environmental bureau chief within 15 days after the release is discovered. The written notification shall verify the prior verbal notification and provide appropriate additions or corrections to the information contained in the prior verbal notification.

19.15.29.11 CORRECTIVE ACTION: The responsible person shall complete division-approved corrective action for releases that endanger public health or the environment. The responsible person shall address releases in accordance with a remediation plan submitted to and approved by the division or with an abatement plan submitted in accordance with 19.15.30 NMAC.

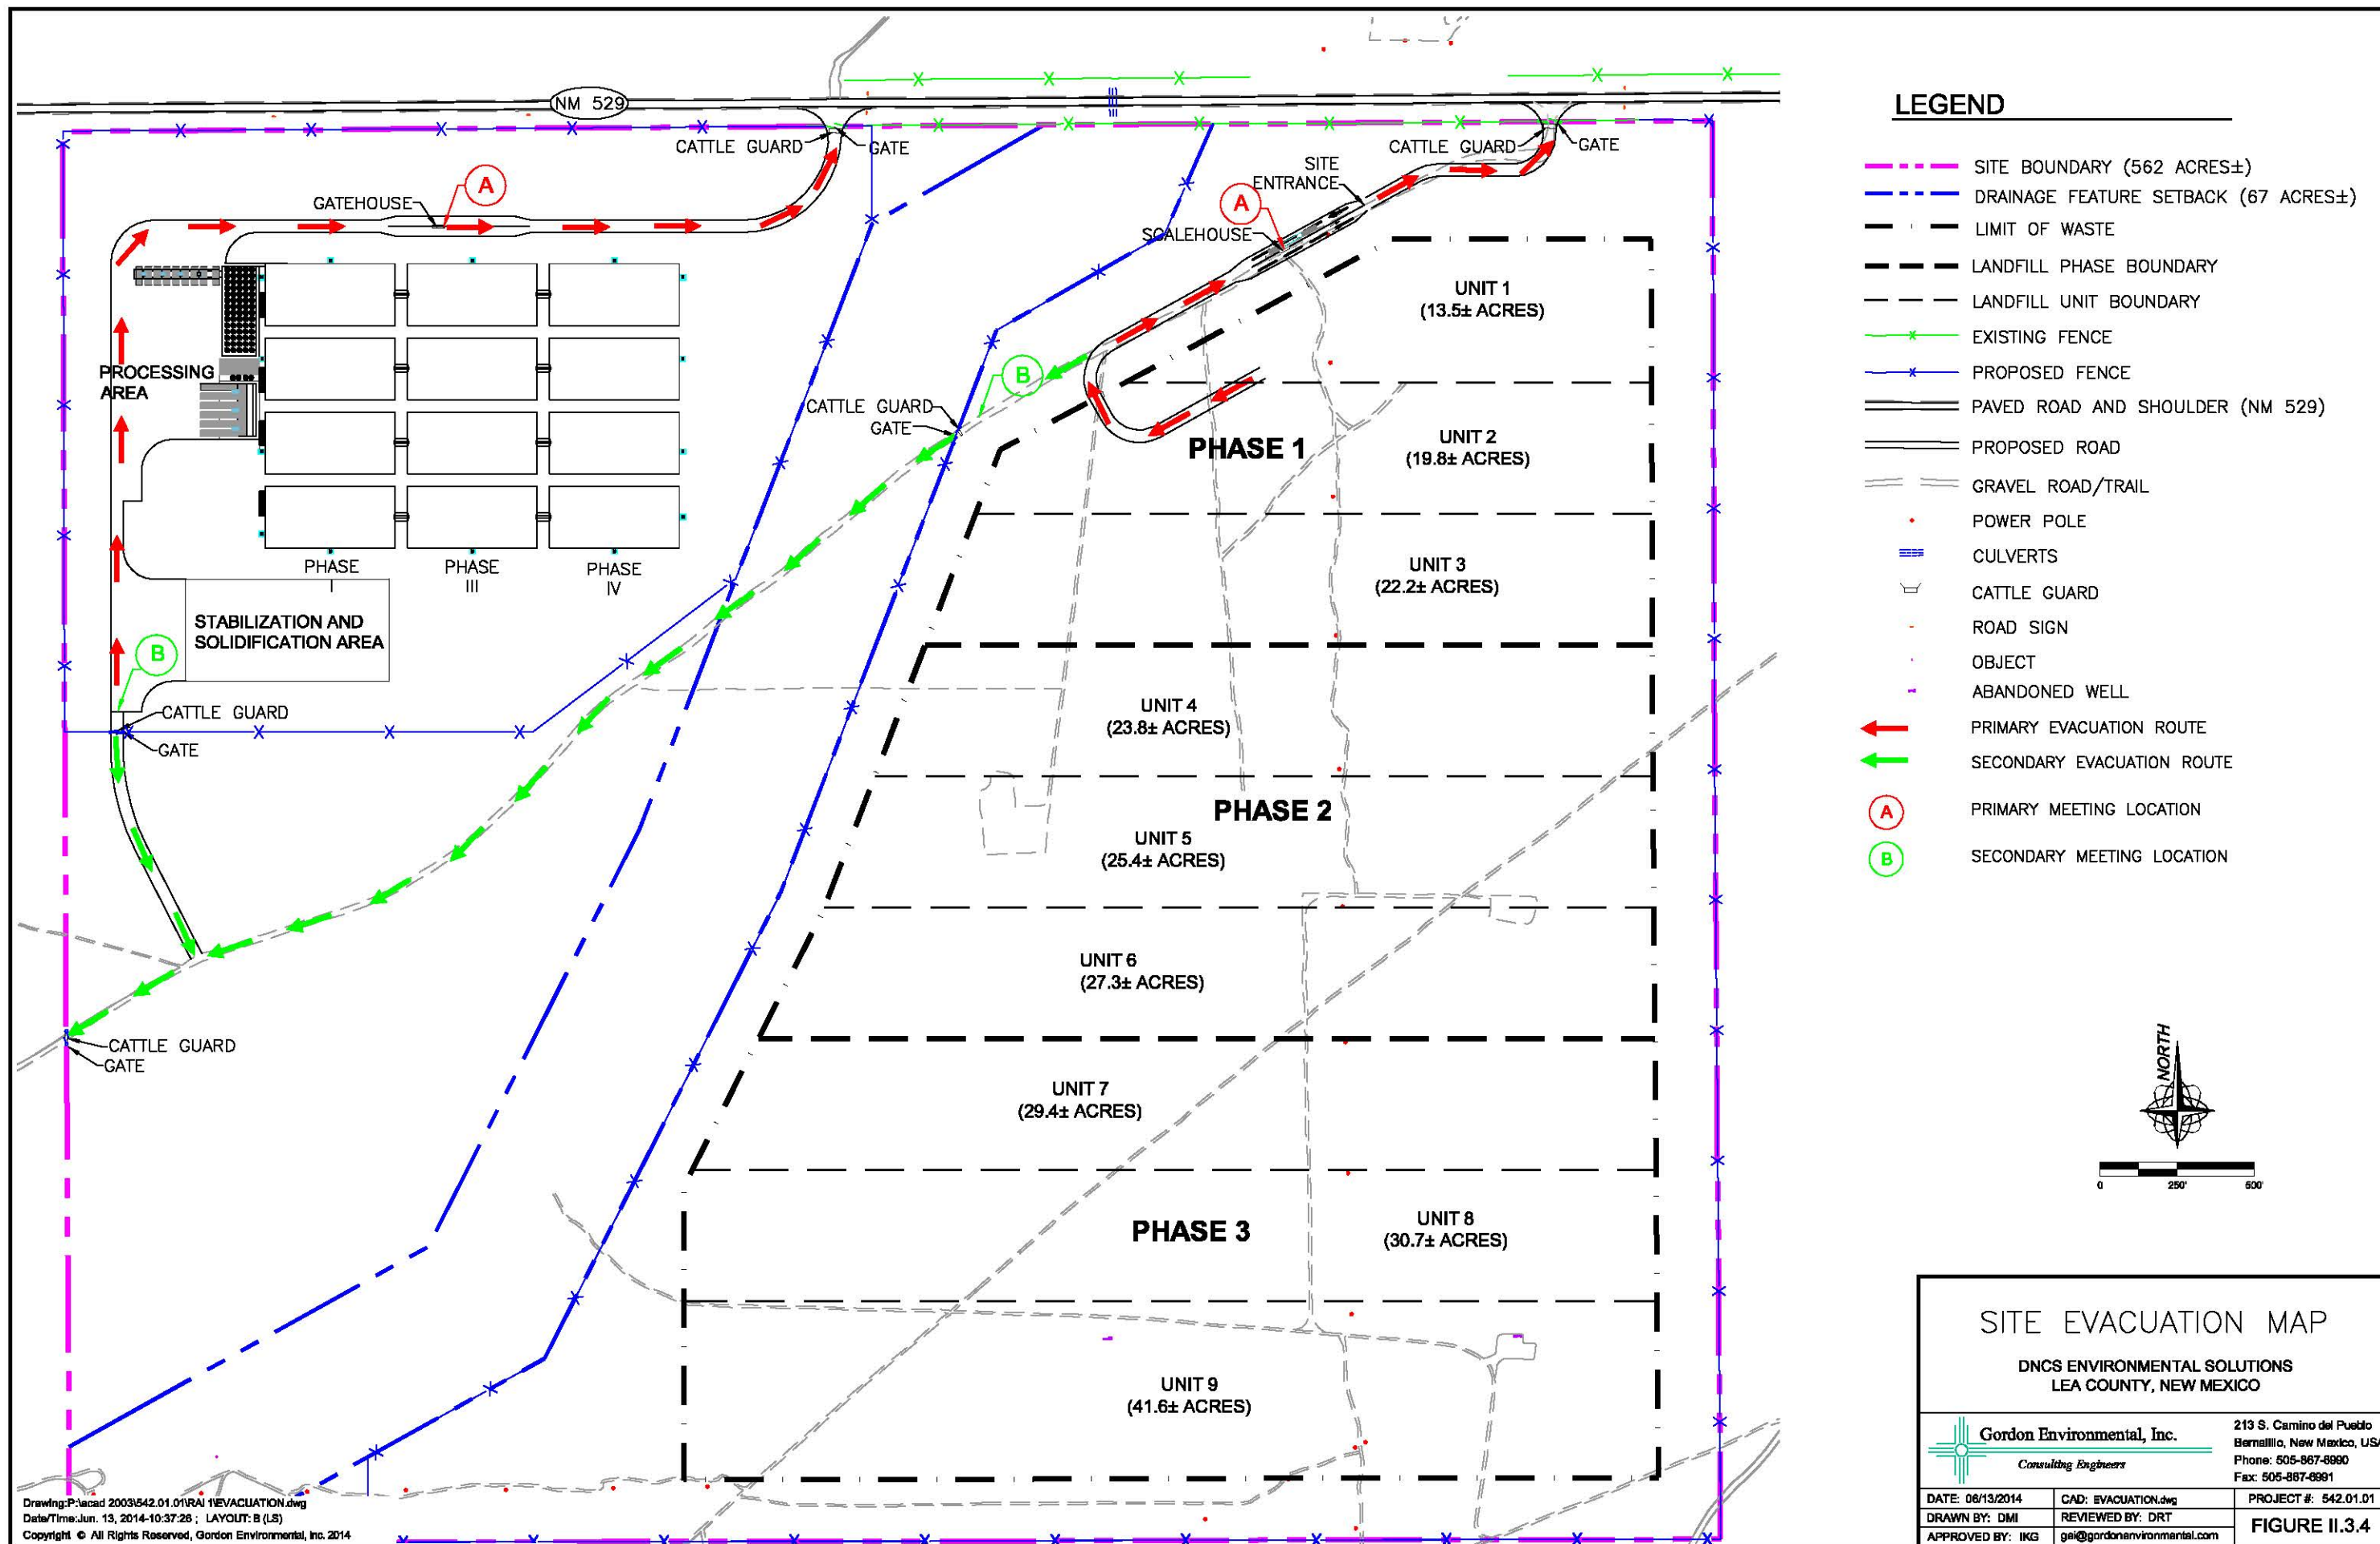

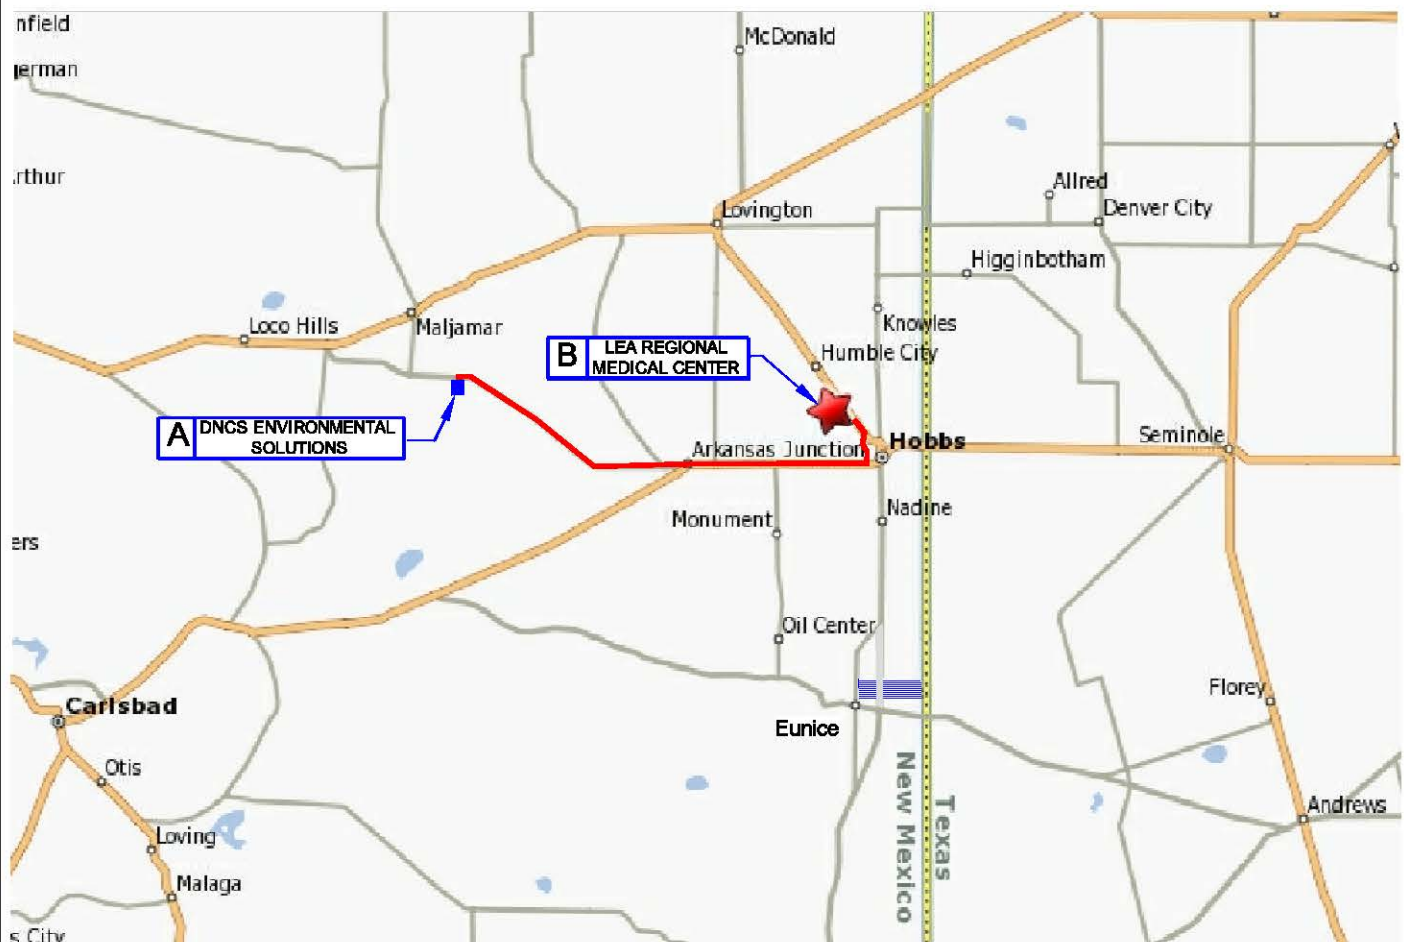

A: DNCS ENVIRONMENTAL SOLUTIONS. NM 529

- | | |
|---|---------|
| 1. Head EAST on NM-529 toward DOG LAKE RD. | 20.2 mi |
| 2. Turn LEFT onto US-180 E / US-62/HOBBS Hwy. | 11.9 mi |
| 3. Turn LEFT onto Co Rd 66A / NW COUNTY ROAD. | 3.5 mi |
| 4. Turn LEFT onto NM-18 N / N LOVINGTON HWY. | 1.8 mi |
| 5. Arrive 5419 N LOVINGTON HWY | 0.0 mi |

B: Lea Regional Medical Center, 5419 N Lovington Hwy, Hobbs, NM 88240-9100

Note: A to B Travel Estimates: 42 minutes / 37.4 miles



HOSPITAL LOCATION MAP

**DNCS ENVIRONMENTAL SOLUTIONS
 LEA COUNTY, NEW MEXICO**



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
 Bernalillo, New Mexico, USA
 Phone: 505-867-8990
 Fax: 505-867-6991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 09/18/13 | CAD: HOSPITAL LOCATION.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.3.5 |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

TABLE II.3.9
Evacuation Procedures
DNCS Environmental Solutions

When evacuation is required, the following procedures will be followed:

1. Facility personnel will be alerted directly or using the Facility telephone, cellular telephones, or radios.
2. Vehicles delivering waste will be diverted away from the location of the emergency and routed towards the Facility exit (**Figure II.3.2**).
3. All Facility operating equipment will be shut down.
4. Personnel will be directed to proceed to the Processing Area Gatehouse or the Landfill Scalehouse (as applicable), which will be the primary meeting locations (**Figure II.3.4**). The EC will identify missing persons at that time.
5. If the emergency involves the Gatehouse or Scalehouse or its immediate environs, the Facility secondary assembly point and evacuation routes will be utilized (as applicable).
6. Once assembled, personnel will stand by to afford assistance and coordinate further actions.

4.3 Notification of Authorities and General Public

This Section provides a series of procedures for implementation and notification of appropriate authorities in the event that a specific emergency develops (19.15.11.16 NMAC). Whenever there is an imminent or actual emergency, the EC will immediately contact on-site persons (Facility personnel, visitors, vendors, haulers, etc.) via on-site communication systems, as well as notify the appropriate state and local agencies (**Table II.3.2**), as necessary. OCD will be notified within 4 hours after the Contingency Plan has been activated.

Table II.3.2 provides a list of emergency response agencies and contacts that may need to be notified depending on the type and extent of an emergency situation. **Table II.3.2** will be posted as appropriate and near on-site telephones for easy access by DNCS personnel. Fire, police, and medical authorities will be contacted, as necessary, in an emergency situation (**Table II.3.2**).

In the case of an H₂S emergency where H₂S is ≥ 10 ppm, notification will be provided to the New Mexico State Police, Lea County Sheriff, and OCD (also listed on **Table II.3.2**):

- OCD
Hobbs, NM (575) 393-6161
Mobile Phone (575) 370-3180
Santa Fe, NM (505) 476-3440
- New Mexico State Police 911 or (575) 392-5580
- Lea County Sherriff's Dept. 911 or (575) 396-3611
- Lea County Emergency Management (575) 391-2983

DNCS will also notify Phoenix Environmental (if necessary) in Hobbs (**Table II.3.2**) to provide response personnel, equipment, and supplies to mitigate the source of an H₂S reading ≥ 10 ppm.

Table II.3.8 provides specific information regarding notification of OCD in the case of a release, which by definition includes breaks, leaks, spills, releases, fires or blowouts. In addition, **Table II.3.8** also provides OCD definitions for “major” and “minor” releases.

Additional State, Federal, and other local emergency contact numbers are provided and should be used as deemed appropriate to the situation (**Table II.3.2**). If the EC determines that the incident could threaten fresh water, human health, public safety or the environment beyond the limits of the Facility, the EC will notify the National Response Center and USEPA at the following phone numbers (also included on **Table II.3.2**):

- National Response Center - 24 Hr. Hotline: (800) 424-8802
- Region VI Emergency Response Hotline (USEPA): (214) 665-2200

The EC's notification to authorities will include the following information, as listed on the Incident Report Form (**Attachment II.3.D**):

- name and telephone number of person reporting the incident
- name and address of Facility
- time and type of incident (e.g., hazardous material release, fire)
- name and quantity of material(s) involved, to the extent known
- extent of injuries, if any
- possible hazards to human health or the environment
- other information requested by the response entity

5.0 EMERGENCY EQUIPMENT

The following sections describe emergency equipment at DNCS that will be available for responding to emergency situations. An Emergency Response Equipment List describing the equipment, quantity, location, and uses is provided as **Table II.3.10**.

TABLE II.3.10
Emergency Response Equipment List¹
DNCS Environmental Solutions

| Equipment Description | Quantity | Location | Use(s) |
|------------------------------------|----------------|--|-------------------------------------|
| 10 lb ABC rated fire extinguisher | 2 | Gatehouse/Scalehouse ² | Firefighting |
| 10 lb ABC rated fire extinguisher | 2 | Trucks | Firefighting |
| 10 lb ABC rated fire extinguisher | 1 | Heavy Equipment | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Oil Process Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Oil Sales Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Produced Water Receiving Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Diesel Storage Tank | Firefighting |
| Loader | 1 | Facility | Berm Repair |
| Oil Booms | 4 | NE Corner of Pond | Oil Containment |
| Self-contained Breathing Apparatus | 1 per employee | Gatehouse/Scalehouse ² | Protective gear for employees |
| Pair leather gloves | 1 per employee | Assigned to employee | Protective gear for employees |
| NOMEX Coveralls | 7 per Employee | Assigned to Employee | Protective gear for employees |
| Pair safety glasses | 1 per employee | All employee workstations | Protective gear for employees |
| Round-point wood handled shovels | 2 | Gatehouse/Scalehouse ² | Contain spillage, putting out fires |
| First Aid Kit | 1 | Gatehouse/Scalehouse ² | First Aid |
| First Aid Kit | 1 per vehicle | Facility Vehicles | First Aid |
| Eye Wash Station | 1 | Produced Water Receiving Tanks | First Aid |
| Portable 2-way radio | 1 per employee | Base unit at Gatehouse/Scalehouse ² | Communications |
| Cell Phones | min. 3 | Facility Manager Facility Operator Facility Operator | Communications |
| Office Phone | 2 | Gatehouse/Scalehouse ² | Communications |
| Mobile pressure washer | 1 | Mobile | Decontaminating equipment |

Notes:

¹Subject to change in response to waste receipts, regulatory requirements, technology, etc.

²The Gatehouse is associated with the Processing Area, and the Scalehouse is associated with the Landfill.

5.1 Internal Communications

Communications at DNCS will be accomplished via cellular telephones, land lines, and two-way radios. These systems provide Facility personnel with immediate emergency notification capabilities, and the opportunity to receive instructions in the event of an emergency incident. Any mechanical difficulties with the communications equipment will be promptly repaired. Internal communication devices are also listed on **Table II.3.10**.

5.2 External Communications

The land-line telephones and cell phones located at DNCS will have outside access in the event that notification of the local emergency response authorities is required (i.e., fire department, ambulance, etc.). Key Facility personnel including the ECs, Facility Manager, etc., will carry cellular telephones for contacting outside agencies. The cellular telephones also provide a backup means for contacting emergency authorities in the event they cannot be reached by conventional telephone lines. Emergency phone numbers will be posted in the Processing Area Gatehouse and the Landfill Scalehouse and provided to employees on laminated pocket cards. External communication devices are also listed on **Table II.3.10**.

5.3 Personnel Protection, First Aid, and Safety Equipment

Personal protective equipment (PPE) necessary for responding to a potential release of hazardous materials will be maintained in on-site buildings (Processing Area Gatehouse and the Landfill Scalehouse and the Produced Water Facility) and/or issued to each employee (**Table II.3.10**). These items include Tyvek suits, gloves, safety glasses, hearing protection, self-contained breathing apparatus (SCBA), etc.

First aid and safety equipment will be maintained at strategic locations at DNCS as shown on **Table II.3.10**. Safety equipment located at the Facility includes industrial first aid kits, fire extinguishers, an eye wash station, etc. An emergency shower will be located at the Produced Water Facility. First aid kits will be placed in the Processing Area Gatehouse and the Landfill Scalehouse and the Produced Water Facility. In addition, first aid kits will be maintained in all Facility vehicles, including heavy equipment. Prominent signs will be placed identifying the location of health and safety equipment, and emergency response items (e.g., fire extinguishers).

6.0 RECORDKEEPING

The EC will be responsible for ensuring that emergency response actions are fully documented. The Primary EC may complete the documentation requirements or delegate to another EC. The Incident Report Form (**Attachment II.3.D**) illustrates the information that will be recorded as a result of any emergency incident and related response action. This form will be signed by both the EC and the Facility Manager. Copies of the form filed for each incident will be retained for OCD review as part of the Facility Operating Record.

In addition, in the case of an unauthorized release at DNCS, the OCD will be notified pursuant to 19.15.29 NMAC. As defined by OCD a “release” is any “*breaks, leaks, spills, releases, fires or blowouts involving crude oil, produced water, condensate, drilling fluids, completion fluids or other chemical or contaminant or mixture thereof, including oil field wastes and natural gases to the environment*” (19.15.2.7.R(4) NMAC). A major release (19.15.29 NMAC; **Table II.3.8**) includes an unauthorized release of any volume which may, with reasonable probability, endanger public health; or an unauthorized release of natural gases in excess of 500 thousand cubic feet (mcf); or a release of any volume which may with reasonable probability endanger public health or results in substantial damage to property or to the environment, cause detriment to water, or exceed the standards in 19.15.30 NMAC. A major release requires both immediate verbal notification (within 24 hours), as well as timely written notification to OCD (within 15 days) using OCD Form C-141 (*Release Notification and Corrective Action*). A minor release (**Table II.3.8**) is an unauthorized release of greater than 50 mcf but less than 500 mcf of natural gases. A minor release requires timely written notice. A copy of OCD Form C-141 is provided as **Attachment II.3.E**. Copies of the Form filed for each incident will be retained on-site as part of the Facility Operating Record.

7.0 COORDINATION AGREEMENTS

A copy of this Plan will be made available to the organizations identified in **Table II.3.2**. This Plan serves to familiarize each of the identified organizations with the operations of the Facility and types of emergencies and responses that may be required. Each agency will be encouraged to visit the Facility for purposes of assessing site operations, and providing input regarding emergency response procedures (19.15.11.9.B.(2)(e) NMAC).

8.0 PLAN AMENDMENT

The EC will be responsible for assuring that updates to or amendments of this Plan are conducted and recorded in the event of any of the following (19.15.11.9.F NMAC):

1. The Facility Permit is revised or modified with potential impacts on this Plan.
2. The OCD mandates it, including responses to regulatory updates.
3. The Plan fails in an emergency.

4. Modification to the Facility design, construction, operation, maintenance or other circumstances that changes the potential circumstance or locations for fires, explosion, or releases of hazardous oil field waste constituents; or related changes in the appropriate emergency response.
5. The list of ECs changes.
6. The list of emergency equipment changes significantly.

The updated Plan will be distributed to OCD and made available to the organizations identified in **Table II.3.1** with a cover letter highlighting any substantive changes. Proposed changes will be in compliance with 19.15.36 NMAC.

9.0 TRAINING

The EC or Facility training representative will ensure all new and existing employees are trained on the H₂S Prevention and Contingency Plan at least annually; or when significant changes to the Plan have been made, whichever is more frequent. Prior to any new employee commencing work, a training session separate from the standard annual training will be conducted to provide specific proficiency in H₂S safety and procedures. Training will include both classroom drills and field exercises simulating H₂S monitoring, potential releases, and evacuation procedures. Included in this training are H₂S hazards identification and detection, personal protection, and contingency procedures.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

**ATTACHMENT II.3.A
MATERIAL SAFETY DATA SHEET FOR H₂S**



MATERIAL SAFETY DATA SHEET

Hydrogen Sulfide

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name: Hydrogen Sulfide
Synonyms: H₂S
Sour Gas
Sulfuretted Hydrogen
Hepatic Gas
Hydrosulfuric Acid
Alliance - Hydrogen Sulfide - 1605
Ferndale - Hydrogen Sulfide - 1605
LAR - Acid Gas
LAR - Sour Gas
Santa Maria - Acid gas
Santa Maria - Sour Gas
Trainer - Hydrogen Sulfide - S173
Wood River - Hydrogen Sulfide - 100240
Intended Use: Refinery by-product
Chemical Family: Inorganic Gas

Responsible Party: ConocoPhillips
600 N. Dairy Ashford
Houston, Texas 77079-1175

MSDS Information: 800-762-0942
MSDS@conocophillips.com

Emergency Overview

24 Hour Emergency Telephone Numbers:

Spill, Leak, Fire or Accident Call CHEMTREC:
North America: (800) 424-9300
Others: (703) 527-3887 (collect)

California Poison Control System: (800) 356-3219

Health Hazards/Precautionary Measures: Poisonous hydrogen sulfide gas. Harmful if inhaled. Causes severe eye irritation. Use with ventilation adequate to keep exposure below recommended limits, if any. Do not breathe gas. Avoid contact with eyes. Wash thoroughly after handling.

Physical Hazards/Precautionary Measures: Flammable gas. Can cause flash fire. Keep away from heat, sparks, flames, static electricity or other sources of ignition. Do not enter storage areas or confined space unless adequately ventilated.

Appearance: Colorless
Physical Form: Gas
Odor: Rotten egg (odorless at high concentrations or after prolonged exposure at low concentrations)

NFPA 704 Hazard Class:

Health: 4 (Extreme)
Flammability: 4 (Extreme)
Instability: 0 (Least)

2. COMPOSITION / INFORMATION ON INGREDIENTS

| HAZARDOUS COMPONENTS | | | | | |
|-------------------------------|-------------|--|---------------------------------------|--------------|--------|
| Component / CAS No: | Percent (%) | ACGIH: | OSHA: | NIOSH: | Other: |
| Hydrogen Sulfide 7783-06-4 | 100 | 10 ppm TWA 14 mg/m ³ TWA 15 ppm STEL 21 mg/m ³ STEL | 20 ppm CEIL 50 ppm 10 min. peak | 100 ppm IDLH | --- |

Note: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

1%=10,000 PPM.
NE=Not Established

3. HAZARDS IDENTIFICATION

Potential Health Effects

Eye: Severe eye irritant. Contact may cause stinging, watering, redness, swelling, and eye damage.

Skin: Skin contact is unlikely. No information available on skin absorption.

Inhalation (Breathing): Toxic. May be harmful if inhaled.

Ingestion (Swallowing): This material is a gas under normal atmospheric conditions and ingestion is unlikely.

Signs and Symptoms: Effects of overexposure may include irritation of the eyes, nose, throat, and respiratory tract, blurred vision, photophobia (sensitivity to light), and pulmonary edema (fluid accumulation in the lungs). Severe exposures can result in nausea, vomiting, muscle weakness or cramps, headache, disorientation and other signs of nervous system depression, irregular heartbeats (arrhythmias), sudden collapse, respiratory failure, convulsions and death.

Cancer: There is no information available on the cancer hazard of this material.

Target Organs: No data available for this material.

Developmental: Inadequate data available for this material.

Other Comments: Hydrogen sulfide is a poisonous gas with the smell of rotten eggs. The smell disappears rapidly because of olfactory fatigue so odor may not be a reliable indicator of exposure.

Pre-Existing Medical Conditions: Conditions aggravated by exposure may include respiratory (asthma-like) disorders.

4. FIRST AID MEASURES

Eye: Immediately move victim away from exposure and into fresh air. If irritation or redness develops, flush eyes with clean water and seek immediate medical attention. For direct contact, immediately hold eyelids apart and flush the affected eye(s) with clean water for at least 20 minutes. Seek immediate medical attention.

Skin: First aid is not normally required. However, it is good practice to wash any chemical from the skin.

Inhalation (Breathing): Immediately move victim away from exposure and into fresh air. If respiratory symptoms or other symptoms of exposure develop, seek immediate medical attention. If victim is not breathing, clear airway and immediately begin artificial respiration. If breathing difficulties develop, oxygen should be administered by qualified personnel. Seek immediate medical attention.

Ingestion (Swallowing): This material is a gas under normal atmospheric conditions and ingestion is unlikely.

Notes to Physician: In high doses hydrogen sulfide may produce pulmonary edema and respiratory depression or paralysis. The first priority in treatment should be the establishment of adequate ventilation and the administration of 100% oxygen. Animal studies suggest that nitrites are a useful antidote; however, documentation of the efficacy of nitrites in humans is lacking. If the diagnosis of H₂S is confirmed and the patient does not respond rapidly to supportive care, the use of nitrites is an alternative treatment. For adults the dose is 10 ml of a 3% NaNO₂ solution (0.5 gm NaNO₂ in 15 mL water) I.V. over 2-4 minutes. Dosage should be adjusted in children or in presence of anemia. Follow blood pressure, methemoglobin levels, arterial blood gases, and electrolytes closely in serious cases.

5. FIRE-FIGHTING MEASURES

Flammable Properties:

| | |
|----------------------------------|---------------------|
| Flash Point: | 10°F / -12°C |
| Test Method: | Test Method Unknown |
| OSHA Flammability Class: | Flammable Gas |
| LEL%: | 4.0 |
| UEL%: | 46.0 |
| Autoignition Temperature: | 500°F / 260°C |

Unusual Fire & Explosion Hazards: This material is flammable and can be ignited by heat, sparks, flames, or other sources of ignition (e.g., static electricity, pilot lights, or mechanical/electrical equipment, and electronic devices such as cell phones, computers, calculators, and pagers which have not been certified as intrinsically safe). Vapors may travel considerable distances to a source of ignition where they can ignite, flash back, or explode. Vapors are heavier than air and can accumulate in low areas. May create vapor/air explosion hazard indoors, in confined spaces, outdoors, or in sewers. If container is not properly cooled, it can rupture in the heat of a fire. Closed containers exposed to extreme heat can rupture due to pressure buildup.

Extinguishing Media: Dry chemical or carbon dioxide is recommended. Carbon dioxide can displace oxygen. Use caution when applying carbon dioxide in confined spaces.

Fire Fighting Instructions: For fires beyond the incipient stage, emergency responders in the immediate hazard area should wear bunker gear. When the potential chemical hazard is unknown, in enclosed or confined spaces, or when explicitly required by DOT, a self contained breathing apparatus should be worn. In addition, wear other appropriate protective equipment as conditions warrant (see Section 8).

Isolate immediate hazard area, keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. If this cannot be done, allow fire to burn. Move undamaged containers from immediate hazard area if it can be done with minimal risk. Stay away from ends of container.

Water spray may be useful in minimizing or dispersing vapors and to protect personnel. Cool equipment exposed to fire with water, if it can be done with minimal risk.

6. ACCIDENTAL RELEASE MEASURES

Flammable. Keep all sources of ignition and hot metal surfaces away from spill/release. The use of explosion-proof electrical equipment is recommended.

Stay upwind and away from spill/release. Notify persons down wind of the spill/release, isolate danger area and keep unauthorized personnel out. Stop spill/release if it can be done with minimal risk. Wear appropriate protective equipment including respiratory protection as conditions warrant (see Section 8).

Water spray may be useful in minimizing or dispersing vapors (see Section 5).

Notify fire authorities and appropriate federal, state, and local agencies. If spill/release in excess of EPA reportable quantity (see Section 15) is made into the environment, immediately notify the National Response Center (phone number 800-424-8802).

7. HANDLING AND STORAGE

Handling: The use of explosion-proof electrical equipment is recommended and may be required (see appropriate fire codes). Refer to NFPA-704 and/or API RP 2003 for specific bonding/grounding requirements.

Do not enter confined spaces such as tanks or pits without following proper entry procedures such as ASTM D-4276 and 29CFR 1910.146. The use of appropriate respiratory protection is advised when concentrations exceed any established exposure limits (see Sections 2 and 8).

Use good personal hygiene practices.

Storage: Keep container(s) tightly closed. In a tank, barge, or other closed container, the vapor space above materials that contain hydrogen sulfide (H₂S) may result in concentrations immediately dangerous to life or health (IDLH). Use and store this material in cool, dry, well-ventilated areas away from heat, direct sunlight, hot metal surfaces, and all sources of ignition. Post area "No Smoking or Open Flame." Store only in approved containers. Keep away from any incompatible material (see Section 10). Protect container(s) against physical damage. Outdoor or detached storage is preferred.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Engineering controls: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits (see Section 2), additional engineering controls may be required. Where explosive mixtures may be present, electrical systems safe for such locations must be used (see appropriate electrical codes).

Personal Protective Equipment (PPE):

Respiratory: Use a NIOSH approved self-contained breathing apparatus (SCBA) or equivalent operated in a pressure demand or other positive pressure mode in oxygen deficient environments (oxygen content <19.5%) or if exposure concentration is unknown or if conditions immediately dangerous to life or health (IDLH) exist.

A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.

Skin: Not required based on the hazards of the material. However, it is considered good practice to wear gloves when handling chemicals.

Eye/Face: The use of a face shield and chemical goggles to safeguard against potential eye contact, irritation, or injury is recommended.

Other Protective Equipment: A source of clean water should be available in the work area for flushing eyes and skin. Impervious clothing should be worn as needed.

Suggestions for the use of specific protective materials are based on readily available published data. Users should check with specific manufacturers to confirm the performance of their products.

9. PHYSICAL AND CHEMICAL PROPERTIES

Note: Unless otherwise stated, values are determined at 20°C (68°F) and 760 mm Hg (1 atm).

| | |
|---|--|
| Appearance: | Colorless |
| Physical Form: | Gas |
| Odor: | Rotten egg (odorless at high concentrations or after prolonged exposure at low concentrations) |
| Odor Threshold: | 0.0047 ppm |
| pH: | Not applicable |
| Vapor Pressure (mm Hg): | 554.6 psia @ 100°F (38°C) |
| Vapor Density (air=1): | 1.20 |
| Boiling Point: | -60°F / -12°C |
| Melting/Freezing Point: | -86°F / -66°C |
| Solubility in Water: | Slight |
| Partition Coefficient (n-octanol/water) (Kow): | No data |
| Specific Gravity: | 1.2 (Gas) |
| Heat Value (BTU): | -6552 (BTU/lb) |

| | |
|------------------------------------|---------------------|
| Percent Volatile: | 100% |
| Evaporation Rate (nBuAc=1): | >1 |
| Molecular Weight: | 34.08 |
| Flash Point: | 10°F / -12°C |
| Test Method: | Test Method Unknown |
| LEL%: | 4.0 |
| UEL%: | 46.0 |
| Autoignition Temperature: | 500°F / 260°C |

10. STABILITY AND REACTIVITY

Stability: Stable under normal ambient and anticipated storage and handling conditions of temperature and pressure. Flammable gas.

Conditions to Avoid: Avoid high temperatures and all sources of ignition (see Sections 5 and 7). Toxic fumes can be released on heating.

Materials to Avoid (Incompatible Materials): Avoid contact with nitric acid, strong oxidizing agents.

Hazardous Decomposition Products: Combustion can yield sulfur oxides.

Hazardous Polymerization: Will not occur.

11. TOXICOLOGICAL INFORMATION

Chronic Data:

No definitive information available on carcinogenicity, mutagenicity, target organ, or developmental toxicity.

Acute Data:

Hydrogen Sulfide - CAS: 7783-06-4

Dermal LD50 = Not Applicable

LC50 = 600 ppm, 30 min. (Human)

Oral LD50 = Not Applicable

12. ECOLOGICAL INFORMATION

Not evaluated at this time.

13. DISPOSAL CONSIDERATIONS

This material, if discarded as produced or spilled to soil or water, would be a RCRA "listed" hazardous waste, as would any soils or waters contaminated by spills of the material. This material is listed as hydrogen sulfide (U135). Further, this material, once it becomes a waste, is subject to the land disposal restrictions at 40 CFR 268.40 and must be treated prior to disposal to meet specific standards. Consult state and local regulations to determine whether they are more stringent than the federal requirements.

Container contents should be completely used and containers should be emptied prior to discard. Container rinsate could be considered a RCRA hazardous waste and must be disposed of with care and in full compliance with federal, state and local regulations. Larger empty containers, such as drums, should be returned to the distributor or to a drum reconditioner. To assure proper disposal of smaller empty containers, consult with state and local regulations and disposal authorities.

14. TRANSPORTATION INFORMATION

DOT

Note: This material normally remains in plant and does not enter the public transportation system. i.e. rail, highway, air or water.

IMDG

ICAO/IATA

| | LTD. QTY. | Passenger Aircraft | Cargo Aircraft Only |
|----------------------------|-----------|--------------------|---------------------|
| Packaging Instruction #: | --- | --- | --- |
| Max. Net Qty. Per Package: | --- | --- | --- |

15. REGULATORY INFORMATION

U.S. Regulations:

EPA SARA 311/312 (Title III Hazard Categories)

Acute Health: Yes
Chronic Health: No
Fire Hazard: Yes
Pressure Hazard: No
Reactive Hazard: No

SARA - Section 313 and 40 CFR 372:

This material contains the following chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372:
Hydrogen Sulfide.....7783-06-4.....100%

EPA (CERCLA) Reportable Quantity (in pounds):

Petroleum Exemption applies to this material.

CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs (in pounds):

This material contains the following chemicals subject to the reporting requirements of SARA 302 and 40 CFR 372:
Hydrogen Sulfide.....7783-06-4.....500

California Proposition 65:

Warning: This material contains the following chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm, and are subject to the requirements of California Proposition 65 (CA Health & Safety Code Section 25249.5):
-- None Known --

Carcinogen Identification:

This material has not been identified as a carcinogen by NTP, IARC, or OSHA.

TSCA:

All components are listed on the TSCA inventory.

International Regulations:

Canadian Regulations:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

Domestic Substances List: Listed

WHMIS Hazard Class:

B1 - Flammable Gases
D1A - Materials Causing Immediate and Serious Toxic Effects - Very Toxic Material
D2B - Materials Causing Other Toxic Effects - Toxic Material

16. OTHER INFORMATION

Issue Date:

13-Oct-2005

Previous Issue Date:

28-Dec-2000

Revised Sections or Basis for Revision:

Responsible party (Section 1)
Added facility synonyms - SEE SECTION 1.
001909

MSDS Code:

Disclaimer of Expressed and implied Warranties:

The information presented in this Material Safety Data Sheet is based on data believed to be accurate as of the date this Material Safety Data Sheet was prepared. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY OTHER WARRANTY IS EXPRESSED OR IS TO BE IMPLIED REGARDING THE ACCURACY OR COMPLETENESS OF THE INFORMATION PROVIDED ABOVE, THE RESULTS TO BE OBTAINED FROM THE USE OF THIS INFORMATION OR THE PRODUCT, THE SAFETY OF THIS PRODUCT, OR THE HAZARDS RELATED TO ITS USE. No responsibility is assumed for any damage or injury resulting from abnormal use or from any failure to adhere to recommended practices. The information provided above, and the product, are furnished on the condition that the person receiving them shall make their own determination as to the suitability of the product for their particular purpose and on the condition that they assume the risk of their use. In addition, no authorization is given nor implied to practice any patented invention without a license.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

**ATTACHMENT II.3.B
REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE
OCD FORM C-138**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-138
Revised August 1, 2011

*Surface Waste Management Facility Operator
and Generator shall maintain and make this
documentation available for Division inspection.

REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE

1. Generator Name and Address:

2. Originating Site:

3. Location of Material (Street Address, City, State or ULSTR):

4. Source and Description of Waste:

Estimated Volume yd³ / bbls Known Volume (to be entered by the operator at the end of the haul) yd³ / bbls

5. GENERATOR CERTIFICATION STATEMENT OF WASTE STATUS

I, , representative or authorized agent for do hereby
certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988
regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA Exempt: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-
exempt waste. *Operator Use Only: Waste Acceptance Frequency* ☐ Monthly ☐ Weekly ☐ Per Load

☐ RCRA Non-Exempt: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by
characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined in 40 CFR, part 261,
subpart D, as amended. The following documentation is attached to demonstrate the above-described waste is non-hazardous. (Check
the appropriate items)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide description in Box 4)

GENERATOR 19.15.36.15 WASTE TESTING CERTIFICATION STATEMENT FOR LANDFARMS

I, , representative for do hereby certify that
representative samples of the oil field waste have been subjected to the paint filter test and tested for chloride content and that the samples
have been found to conform to the specific requirements applicable to landfarms pursuant to Section 15 of 19.15.36 NMAC. The results
of the representative samples are attached to demonstrate the above-described waste conform to the requirements of Section 15 of
19.15.36 NMAC.

5. Transporter:

OCD Permitted Surface Waste Management Facility

Name and Facility Permit #:

Address of Facility:

Method of Treatment and/or Disposal:

☐ Evaporation ☐ Injection ☐ Treating Plant ☐ Landfarm ☐ Landfill ☐ Other

Waste Acceptance Status:

☐ APPROVED

☐ DENIED (Must Be Maintained As Permanent Record)

PRINT NAME:

TITLE:

DATE:

SIGNATURE: _____

TELEPHONE NO.:

Surface Waste Management Facility Authorized Agent

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

**ATTACHMENT II.3.C
DAILY AIR AND WATER INSPECTION REPORT FORM H₂S MONITOR
(TYPICAL)**

ATTACHMENT II.3.C

Daily Air and Water Inspection (Typical)

DNCS Environmental Solutions

YEAR _____ MONTH _____ WEEK BEGINNING _____

AMBIENT AIR WIND SPEED/DIRECTION
A. AM READINGS, NOTE INITIALS AND TIME
B. PM READINGS, NOTE INITIALS AND TIME

SUMP LEVELS
A. POND AND SLAB CHECKED DAILY, NOTE INITIALS AND TIME
B. PUMP SUMP CHECKED AM & PM, NOTE INITIALS AND TIME
C. LOADING AREA SUMP CHECKED AM & PM, NOTE INITIALS AND TIME

LOADING SUMP EMPTIED
A. LOADING AREA SUMP EMPTIED AT 4 PM, NOTE INITIALS AND TIME
CONCRETE SLAB EMPTIED
A. SLAB EMPTIED AT 4 PM, NOTE INITIALS AND TIME

| Date | Sun | Mon | Tues | Wed | Thu | Fri | Sat |
|------------------------------|-----|-----|------|-----|-----|-----|-----|
| Ambient Air H2S (AM) | | | | | | | |
| H2S Reading (ppm) | | | | | | | |
| Wind Speed (mph) | | | | | | | |
| Wind Direction | | | | | | | |
| Initials and Time | | | | | | | |
| Ambient Air H2S (PM) | | | | | | | |
| H2S Reading (ppm) | | | | | | | |
| Wind Speed (mph) | | | | | | | |
| Wind Direction | | | | | | | |
| Initials and Time | | | | | | | |
| Sump Levels | | | | | | | |
| AM Pond Sump (ft) | | | | | | | |
| AM Cement Slab (ft) | | | | | | | |
| AM Loading Area (ft) | | | | | | | |
| AM Pump House Sump (ft) | | | | | | | |
| Initials and Time | | | | | | | |
| PM Loading Area (ft) | | | | | | | |
| PM Pump House(ft) | | | | | | | |
| Initials and Time | | | | | | | |
| Loading Sump Emptied | | | | | | | |
| Initials and Time | | | | | | | |
| Concrete Slab Emptied | | | | | | | |
| Initials and Time | | | | | | | |
| Pond Conditions | | | | | | | |
| Pond Level | | | | | | | |
| Overflow Color | | | | | | | |
| Pond Color | | | | | | | |
| Water Temperature | | | | | | | |
| pH | | | | | | | |
| Dissolved Oxygen | | | | | | | |
| Total Chlorine | | | | | | | |
| Dissolved H2S/Sulfides | | | | | | | |
| Bleach/Chemical | | | | | | | |
| Volume | | | | | | | |
| Time | | | | | | | |
| Initials | | | | | | | |
| Volume | | | | | | | |
| Time | | | | | | | |
| Initials | | | | | | | |
| Volume | | | | | | | |
| Time | | | | | | | |
| Initials | | | | | | | |
| Manager Verification | | | | | | | |
| Initials and Time | | | | | | | |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

**ATTACHMENT II.3.D
INCIDENT REPORT FORM (TYPICAL)**

INCIDENT REPORT FORM

DNCS Environmental Solutions

Lea County, NM

Type of Incident and General Information

- | | |
|--|--|
| <input type="checkbox"/> Work Related Injury/Illness | <input type="checkbox"/> Unsafe Act/Near Miss |
| <input type="checkbox"/> Property Damage | <input type="checkbox"/> Vandalism/Criminal Activity |
| <input type="checkbox"/> Vehicular Accident | <input type="checkbox"/> Other _____ (i.e., spill, release, fire, explosion, hot load, etc.) |

Employee Name: _____ Job Title: _____

Phone No: _____ Date of Incident: _____ Time of Incident: _____ AM/PM

Location of Incident: _____

Start of Shift: _____ Weather: _____

Date and Time Reported to Management: Date: _____ Time: _____ AM/PM

Reported to: _____ Title: _____ Reported by: _____

What was the injury category of incident at the time it was first reported to management?

- ☐ N/A. Employee does not claim an injury associated with this incident
- ☐ Notice Only of Injury, Declined Medical Treatment at this time
- ☐ First Aid done on site, Declined Medical Treatment at this time
- ☐ Medical Treatment. Transported by _____ to _____
- ☐ Fatality, employee

Employee's Description of Incident / Declaración del empleado de los hechos

Were you injured? (*Ud. se lastimó ?*) Yes ☐ No ☐

Type of Injury: (*Tipo de lesión*) _____

Part of Body: _____ Left _____ Right _____
(*Parte del cuerpo*) (*Izq*) (*Der*)

Explain in your own words what happened. (*Explique en sus propias palabras lo que sucedió*)

Employee Signature: (*Firma del empleado*) _____

Date: (*Fecha*) _____

THIS SECTION FILLED OUT BY
EMPLOYEE

INCIDENT REPORT FORM
DNCS Environmental Solutions

TO BE FILLED OUT BY EMERGENCY COORDINATOR

Describe in order of occurrence the events leading to the incident and/or injury. Reconstruct the sequence of events that led to the incident. _____

Identify possible hazards to human health or the environment: _____

Identify name and quantity of material(s) involved: _____

CORRECTIVE ACTIONS. (Equipment, Practices, Environment, Retraining) Steps that have been, or will be taken to prevent recurrence: _____

Date Corrective Action Completed: _____

- I have been briefed on the corrective actions outlined above
- *Estoy consciente de las acciones correctivas mencionadas anteriormente en esta hoja*

Employee's Signature

Date

Report Reviewed and Concluded By:

Emergency Coordinator's Signature

Date

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 3: HYDROGEN SULFIDE (H₂S) PREVENTION AND
CONTINGENCY PLAN**

**ATTACHMENT II.3.E
RELEASE NOTIFICATION AND CORRECTIVE ACTION
OCD FORM C-141**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised August 8, 2011

Submit 1 Copy to appropriate District Office in
accordance with 19.15.29 NMAC.

Release Notification and Corrective Action

OPERATOR

☐ Initial Report ☐ Final Report

| | | |
|-----------------|---------------|---------|
| Name of Company | Contact | |
| Address | Telephone No. | |
| Facility Name | Facility Type | |
| Surface Owner | Mineral Owner | API No. |

LOCATION OF RELEASE

| | | | | | | | | |
|-------------|---------|----------|-------|---------------|------------------|---------------|----------------|--------|
| Unit Letter | Section | Township | Range | Feet from the | North/South Line | Feet from the | East/West Line | County |
|-------------|---------|----------|-------|---------------|------------------|---------------|----------------|--------|

Latitude _____ Longitude _____

NATURE OF RELEASE

| | | |
|---|---|----------------------------|
| Type of Release | Volume of Release | Volume Recovered |
| Source of Release | Date and Hour of Occurrence | Date and Hour of Discovery |
| Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required | If YES, To Whom? | |
| By Whom? | Date and Hour | |
| Was a Watercourse Reached? <input type="checkbox"/> Yes <input type="checkbox"/> No | If YES, Volume Impacting the Watercourse. | |

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*

Describe Area Affected and Cleanup Action Taken.*

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

| | | | | | |
|-----------------|--|---------------------------------------|--|-----------------------------------|--|
| Signature: | | <u>OIL CONSERVATION DIVISION</u> | | | |
| | | Approved by Environmental Specialist: | | | |
| Printed Name: | | Approval Date: | | Expiration Date: | |
| Title: | | Conditions of Approval: | | Attached <input type="checkbox"/> | |
| E-mail Address: | | | | | |
| Date: | | Phone: | | | |

* Attach Additional Sheets If Necessary

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-------------|
| 1.0 | INTRODUCTION | II.4-1 |
| 1.1 | Purpose..... | II.4-1 |
| 1.2 | Site Location | II.4-3 |
| 1.3 | Facility Description..... | II.4-3 |
| 2.0 | CLOSURE PLAN..... | II.4-3 |
| 2.1 | Construction Schedule | II.4-3 |
| 2.2 | Liquids Removal..... | II.4-5 |
| 2.3 | Evaporation Pond Liner Removal..... | II.4-6 |
| 2.4 | Tank Removal..... | II.4-6 |
| 2.5 | Jet Wash Facility..... | II.4-6 |
| 2.6 | Treatment Plant..... | II.4-7 |
| 2.7 | Site Sampling..... | II.4-7 |
| 2.8 | Final Site Closure – Processing Area..... | II.4-9 |
| 2.9 | Solid Waste Disposal Area | II.4-9 |
| 2.10 | Miscellaneous Building and Structure Removal..... | II.4-12 |
| 2.11 | Final Land Use | II.4-12 |
| 3.0 | POST-CLOSURE PLAN..... | II.4-12 |
| 3.1 | Post-Closure Maintenance | II.4-12 |
| 3.2 | Reporting..... | II.4-13 |
| 4.0 | FINANCIAL ASSURANCE | II.4-13 |
| 4.1 | Closure/Post Closure Cost Estimate | II.4-13 |
| 4.2 | Release of Financial Assurance | II.4-14 |

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|-----------------------------|-------------|
| II.4.1 | SITE LOCATION MAP | II.4-4 |
| II.4.2 | TYPICAL SAMPLING GRID | II.4-8 |
| II.4.3 | FINAL COVER PROFILE | II.4-11 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

LIST OF TABLES

| Table No. | Title | Page |
|------------------|---------------------------------|-------------|
| II.4.1 | DNCS DEVELOPMENT SEQUENCE | II.4-2 |
| II.4.2 | CLOSURE PROCEDURES | II.4-5 |
| II.4.3 | NRCS RECOMMENDED SEED MIX | II.4-12 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| II.4.A | C/PC COST ESTIMATES |
| II.4.B | FINANCIAL ASSURANCE DOCUMENTATION |
| II.4.C | CLOSURE DOCUMENTATION RECORD (TYPICAL) |
| II.4.D | POST-CLOSURE SITE INSPECTION CHECKLIST (TYPICAL) |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

1.0 INTRODUCTION

DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Purpose

The purpose of this Closure/Post-Closure (C/PC) Plan (the Plan) is to comply with the requirements of 19.15.36.8.C.(9) and 19.15.36.18 NMAC. This Plan describes the proposed procedures for closure and post-closure of the DNCS Facility, including a C/PC Cost Estimate sufficient to close the Facility in a manner that will protect fresh water, public health, safety and the environment.

The oil field waste processing and disposal infrastructure is anticipated to be developed and operated in four phases (Phases I-IV) over a projected multi-year time period to allow for the development of services in response to the needs of the oil and gas industry. **Table II.4.1**, DNCS Development Sequence, provides an outline of the projected phased development, including an implementation schedule for the installation of waste processing and disposal activities at the DNCS Facility. However, different combinations of these improvements may be constructed at any time dependent on market conditions and logistical considerations. This C/PC Plan may be modified by DNCS to address changes in site or operating conditions; and submitted and approved by OCD 30 days prior to implementation of proposed change. This Plan may also be amended at the request of OCD per 19.15.36.18.A.(5) NMAC.

TABLE II.4.1
DNCS Development Sequence¹
DNCS Environmental Solutions

| Description | Summary | Year No. ² |
|--|--|-----------------------|
| Phase I - Initial Landfill & Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Initial Landfill Cell (13.5-acres) Produced water load-out points (4) Tank farm berm (complete) Boiler (75 HP) running a heat transfer fluid tank farm Produced Water Receiving Tanks (4), 1,000 bbl capacity³ Settling Tanks (16), 1,000 bbl capacity Crude Oil Recovery Tank (1), 1,000 bbl capacity Oil Sale Tank (1), 1,000 bbl capacity Mechanical Oil/Water Separation Unit Ponds (4) capable of evaporating 3,000 bbl of liquid per day | The oil recovered from the Produced Water Processing Operations process is anticipated to be 6 bbl per day. This material will be pumped to the heated crude oil recovery tank for further processing before being pumped to the oil sale tank. | 1 |
| Phase II - Jet-Out Pit Operation. | | |
| <ul style="list-style-type: none"> Jet-Out Pit (six-station) for handling basic sediment and water (BS&W), tank bottoms, oily drilling muds and tank wash-outs Additional crude oil recovery tank (1), 1,000 bbl capacity Install 5-acre Stabilization and Solidification area | The oil recovered from the top of the Jet-Out Pit will be pumped to a heated Crude Oil Recovery Tank installed in the Tank Farm. Oil recovery from the Produced Water Tanks will also be plumed to this tank. Water recovered from the Pit will be pumped to the Produced Water Receiving Tanks. Sediments from the Pit will be bucket-loaded out of the pit and transferred to the Stabilization and Solidification Area for processing prior to landfilling. | 2 |
| Phase III - Expanded Produced Water Processing Operation. | | |
| <ul style="list-style-type: none"> Produced water load-out points (4) Additional Produced Water Receiving Tanks (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Crude Oil Recovery Tanks (3), 1,000 bbl capacity Additional Oil Sales Tanks (2), 1,000 bbl capacity Additional (2) Mechanical Oil/Water Separation Units Additional ponds (4) capable of evaporating an additional 5,000 bbl per day of liquid | The additional oil recovered from the expanded Produced Water Processing Operation process, anticipated to be 6 bbl per day, will be pumped to the Crude Oil Recovery tanks for further processing. | 3 |
| Phase VI - Ultimate Produced Water Processing Facility. | | |
| <ul style="list-style-type: none"> Additional Produced Water Receiving Tank (4), 1,000 bbl capacity Additional Settling Tanks (16), 1,000 bbl capacity Additional Oil Sales Tanks (1), 1,000 bbl capacity Additional Mechanical Oil/Water Separation Unit Additional ponds (4) capable of evaporating an additional 4,000 bbl per day of liquid | The additional oil recovered from the ultimate Produced Water Processing Facility will be pumped to the Crude Oil Recovery Tank for further processing. | 4 |

Notes:

¹ The DNCS site development sequence is subject to change. Different combination of these improvements may be constructed at any time.

² Estimated number of years after OCD Surface Waste Management Facility Permit issued

³ bbl = barrels of oil

1.2 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.4.1**). Site access will be provided via the south side of NM 529.


1.3 Facility Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components; a liquid oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site **Permit Plans, Sheet 3** identifies the locations of the Processing Area and Landfill facilities.

2.0 CLOSURE PLAN

2.1 Construction Schedule

DNCS will notify OCD's Environmental Bureau at least 60 days prior to cessation of permanent operations at the DNCS Facility. Included in this notification will be a proposed schedule for closure and monitoring activities. During the 60 day period after notification, it is anticipated that DNCS will coordinate the required site inspection by OCD. During this period, DNCS and OCD will additionally review and modify part of this C/PC Plan and proposed schedule that may be required for the protection of fresh water, public health, safety, or the environment that may result from the required OCD review or site inspection(s). Should OCD not notify DNCS of modification or additions to the C/PC Plan, DNCS will commence the following closure activities at the Facility provided the Director has not extended, in good cause, the OCD's response to the closure notification, as summarized on **Table II.4.2**.

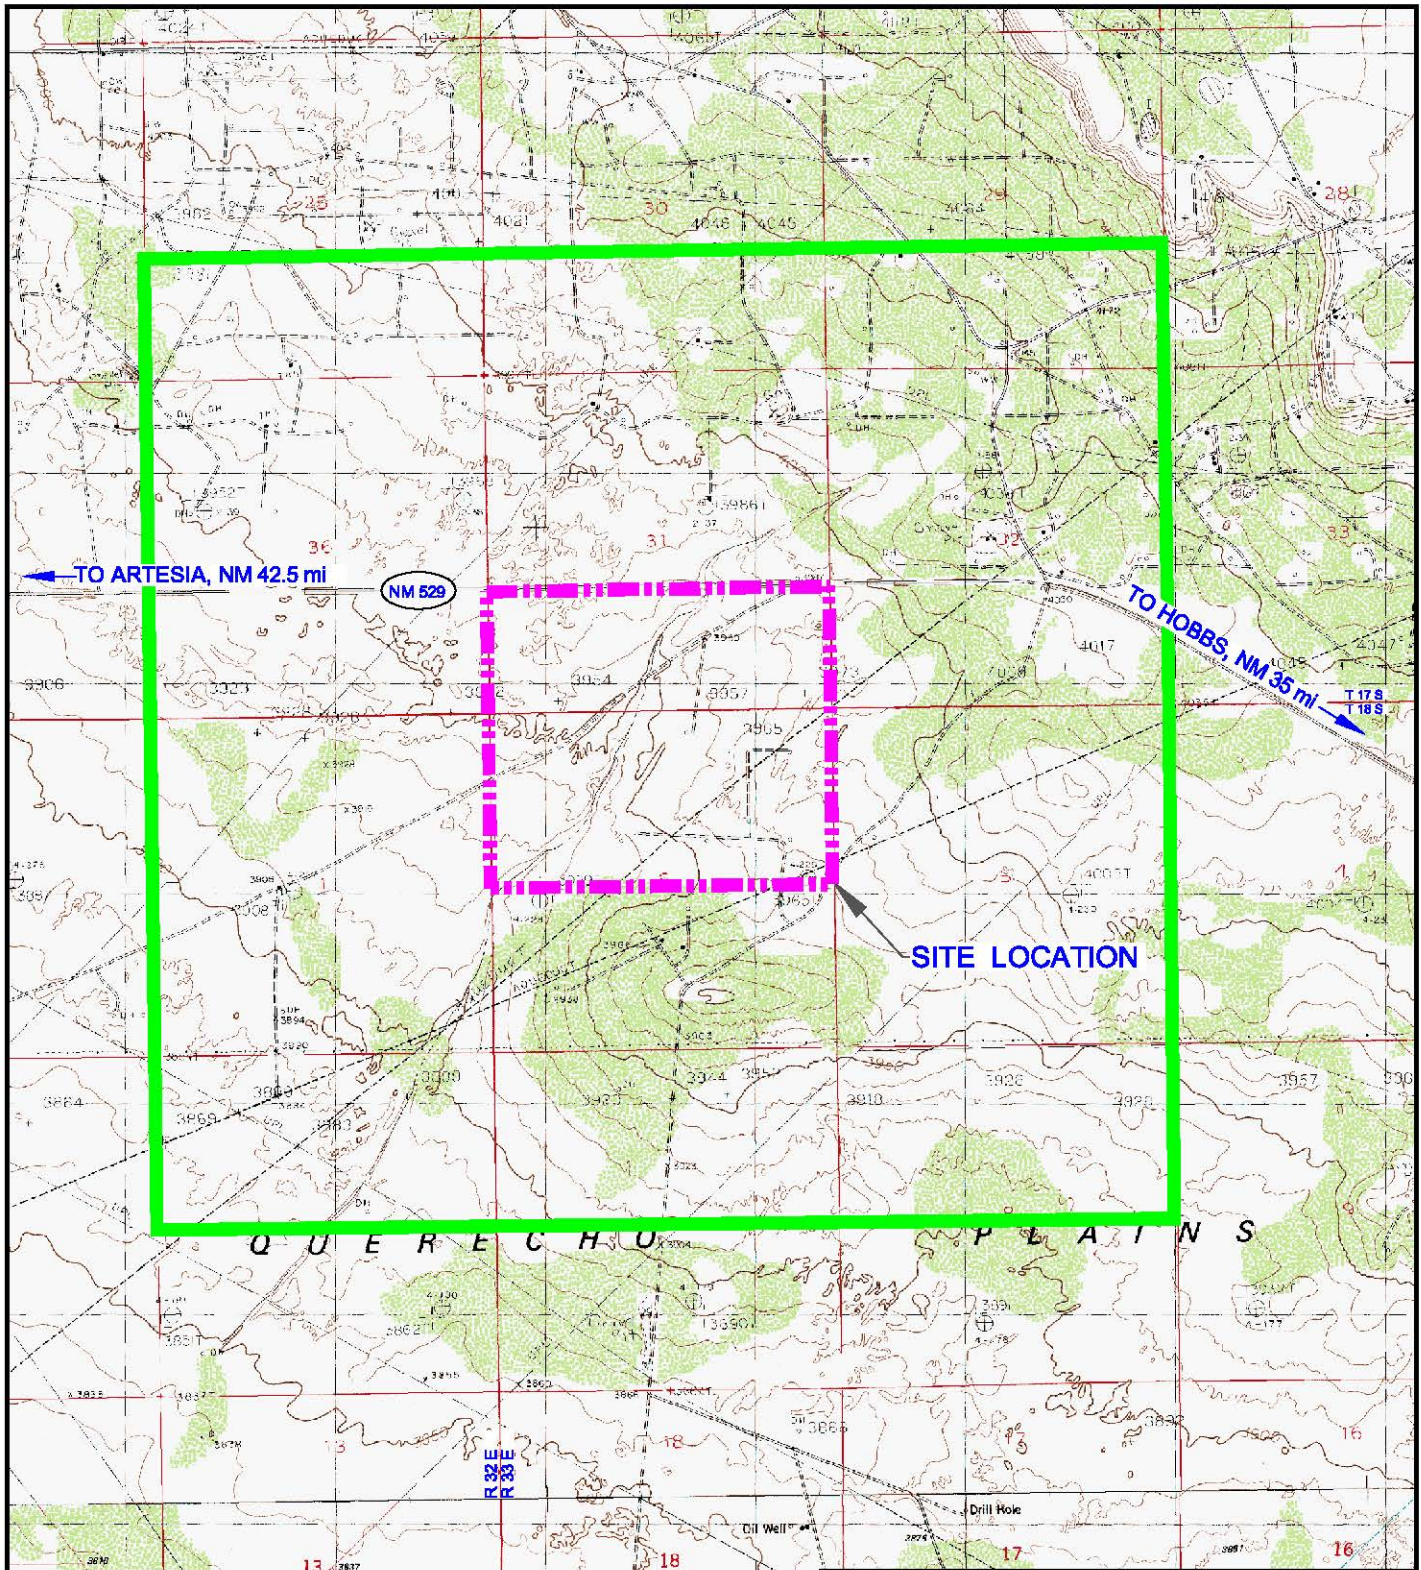


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:54:58 ; LAYOUT: A (P)

Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.4.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

TABLE II.4.2
Closure Procedures
DNCS Environmental Solutions

- Processing Area:
 - Liquids Removal
 - Evaporation Pond Liner Removal
 - Tank Removal
 - Jet Wash Facility Closure
 - Treatment Plant Disassembly
 - Site Sampling
 - Final Site Closure
- Solid Waste Disposal Area:
 - Landfill closure construction
 - Final cover
 - Vegetation
 - Landfill closure documentation
- Miscellaneous Building and Structure Removal
- Final Land Use

2.2 Liquids Removal

Produced water remaining in receiving tanks will be pumped or transported to the evaporation ponds. Once all produced water is placed into the ponds, and free floating crude oil is removed and taken to the treating plant, evaporation will be conducted with or without the aid of a mechanical evaporation system. DNCS may introduce soils when sufficient evaporation has taken place to expedite solidification. Once solidification has been completed and the waste has been tested, the material will be encapsulated at the solid waste disposal area (DNCS Landfill). Although highly unlikely, should the DNCS Landfill not be in operation at the time of closure, all remaining liquids or solids will be removed from the ponds and disposed of in an OCD-approved surface waste management facility.

2.3 Evaporation Pond Liner Removal

Upon successful liquids removal, the remaining sludge, if any, will be allowed to dry to a consistency that lends itself to management and removal (i.e., paint filter test). Although highly unlikely, should the DNCS Landfill not be in operation at the time of closure, remaining solids will be removed from the ponds and disposed of in an OCD-approved surface waste management facility as self-generated exempt waste in conformance with current operating standards.

Once the sludge has been removed, the high-density polyethylene (HDPE) liner system components will be thoroughly cleaned in accordance with 19.15.35.8 NMAC. DNCS proposes to cut the HDPE liner material and geocomposite into manageable pieces and disposal of the material in the DNCS Landfill; or to transport the material to a New Mexico Environment Department Solid Waste Bureau approved recycling or disposal facility upon approval from OCD.

2.4 Tank Removal

Upon closure, all tanks, piping and equipment will be emptied and cleaned. DNCS will dispose of the residual exempt oil field waste removed from the tanks and deposit it in the solidification area. If the DNCS Landfill is not in operation at time of closure, remaining solids will be removed and disposed of in an OCD-approved surface waste management facility capable of managing the exempt waste stream. DNCS will reuse, recycle or remove the tanks, infrastructure, and equipment from the site within 90 days of closure and notify OCD accordingly.

2.5 Jet Wash Facility

Closure of the Jet Wash Facility will consist of dismantling the above-grade installations for recycling (of clean elements) or on-site disposal. The tanks will be cleaned for re-use or recycled as scrap metal. The liner and gravel from the leak detection zone will be exhumed and disposed of on-site. If the DNCS Landfill is not in operation at time of closure, all remaining solids will be removed from the Facility and disposed of in an OCD-approved surface waste management facility following OCD procedures.

2.6 Treatment Plant


Once crude oil recovery processes have been completed, the treatment plant will be disassembled. Associated piping leading to or from the treatment plant will be removed, cleaned and recycled for reuse. Once equipment, tanks, piping, and buildings have been dismantled (if applicable) the treatment plant will be inspected for contamination. If contamination is discovered, the affected zone will be excavated and disposed of in the solid waste disposal area, and the area will be tested until confirmed to meet applicable regulatory standards. If the DNCS Landfill is not in operation at time of closure, remaining solids will be removed from the Facility and disposed of in an OCD-approved surface waste management facility following OCD disposal protocols.

2.7 Site Sampling

Once Processing Area tanks, equipment, and liners have been removed, but prior to backfilling ponds and site leveling, the site will be sampled in accordance with chapter nine of United States Environmental Protection Agency (EPA) publication SW-846; *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods*. A typical sampling grid is provided as **Figure II.4.2** (@ 5 tests/acres), which illustrates the proposed sampling locations for the DNCS Processing Area to document proper closure. Soil samples will be taken at select locations in the areas used for shipping and receiving, treatment and storage areas, and the evaporation ponds area. The soil samples will be taken at select depths within the in-situ soil, including at least one from the first foot of soil; and one within 36 to 42 inches below the surface. Samples will be evaluated for the following constituents:

- TPH
- BTEX
- Metals and organics listed in Water Quality Control Commission (WQCC) 20.6.2.3103.A&B

Samples will be submitted to the OCD's Environmental Bureau (Santa Fe). Provided the sample results indicate no contamination persists at the Facility in excess of allowable levels, DNCS will proceed with final site closure and post-closure activities. If contamination is observed at 42 inches, excavation and sampling will continue to the depth where no contamination is observed.

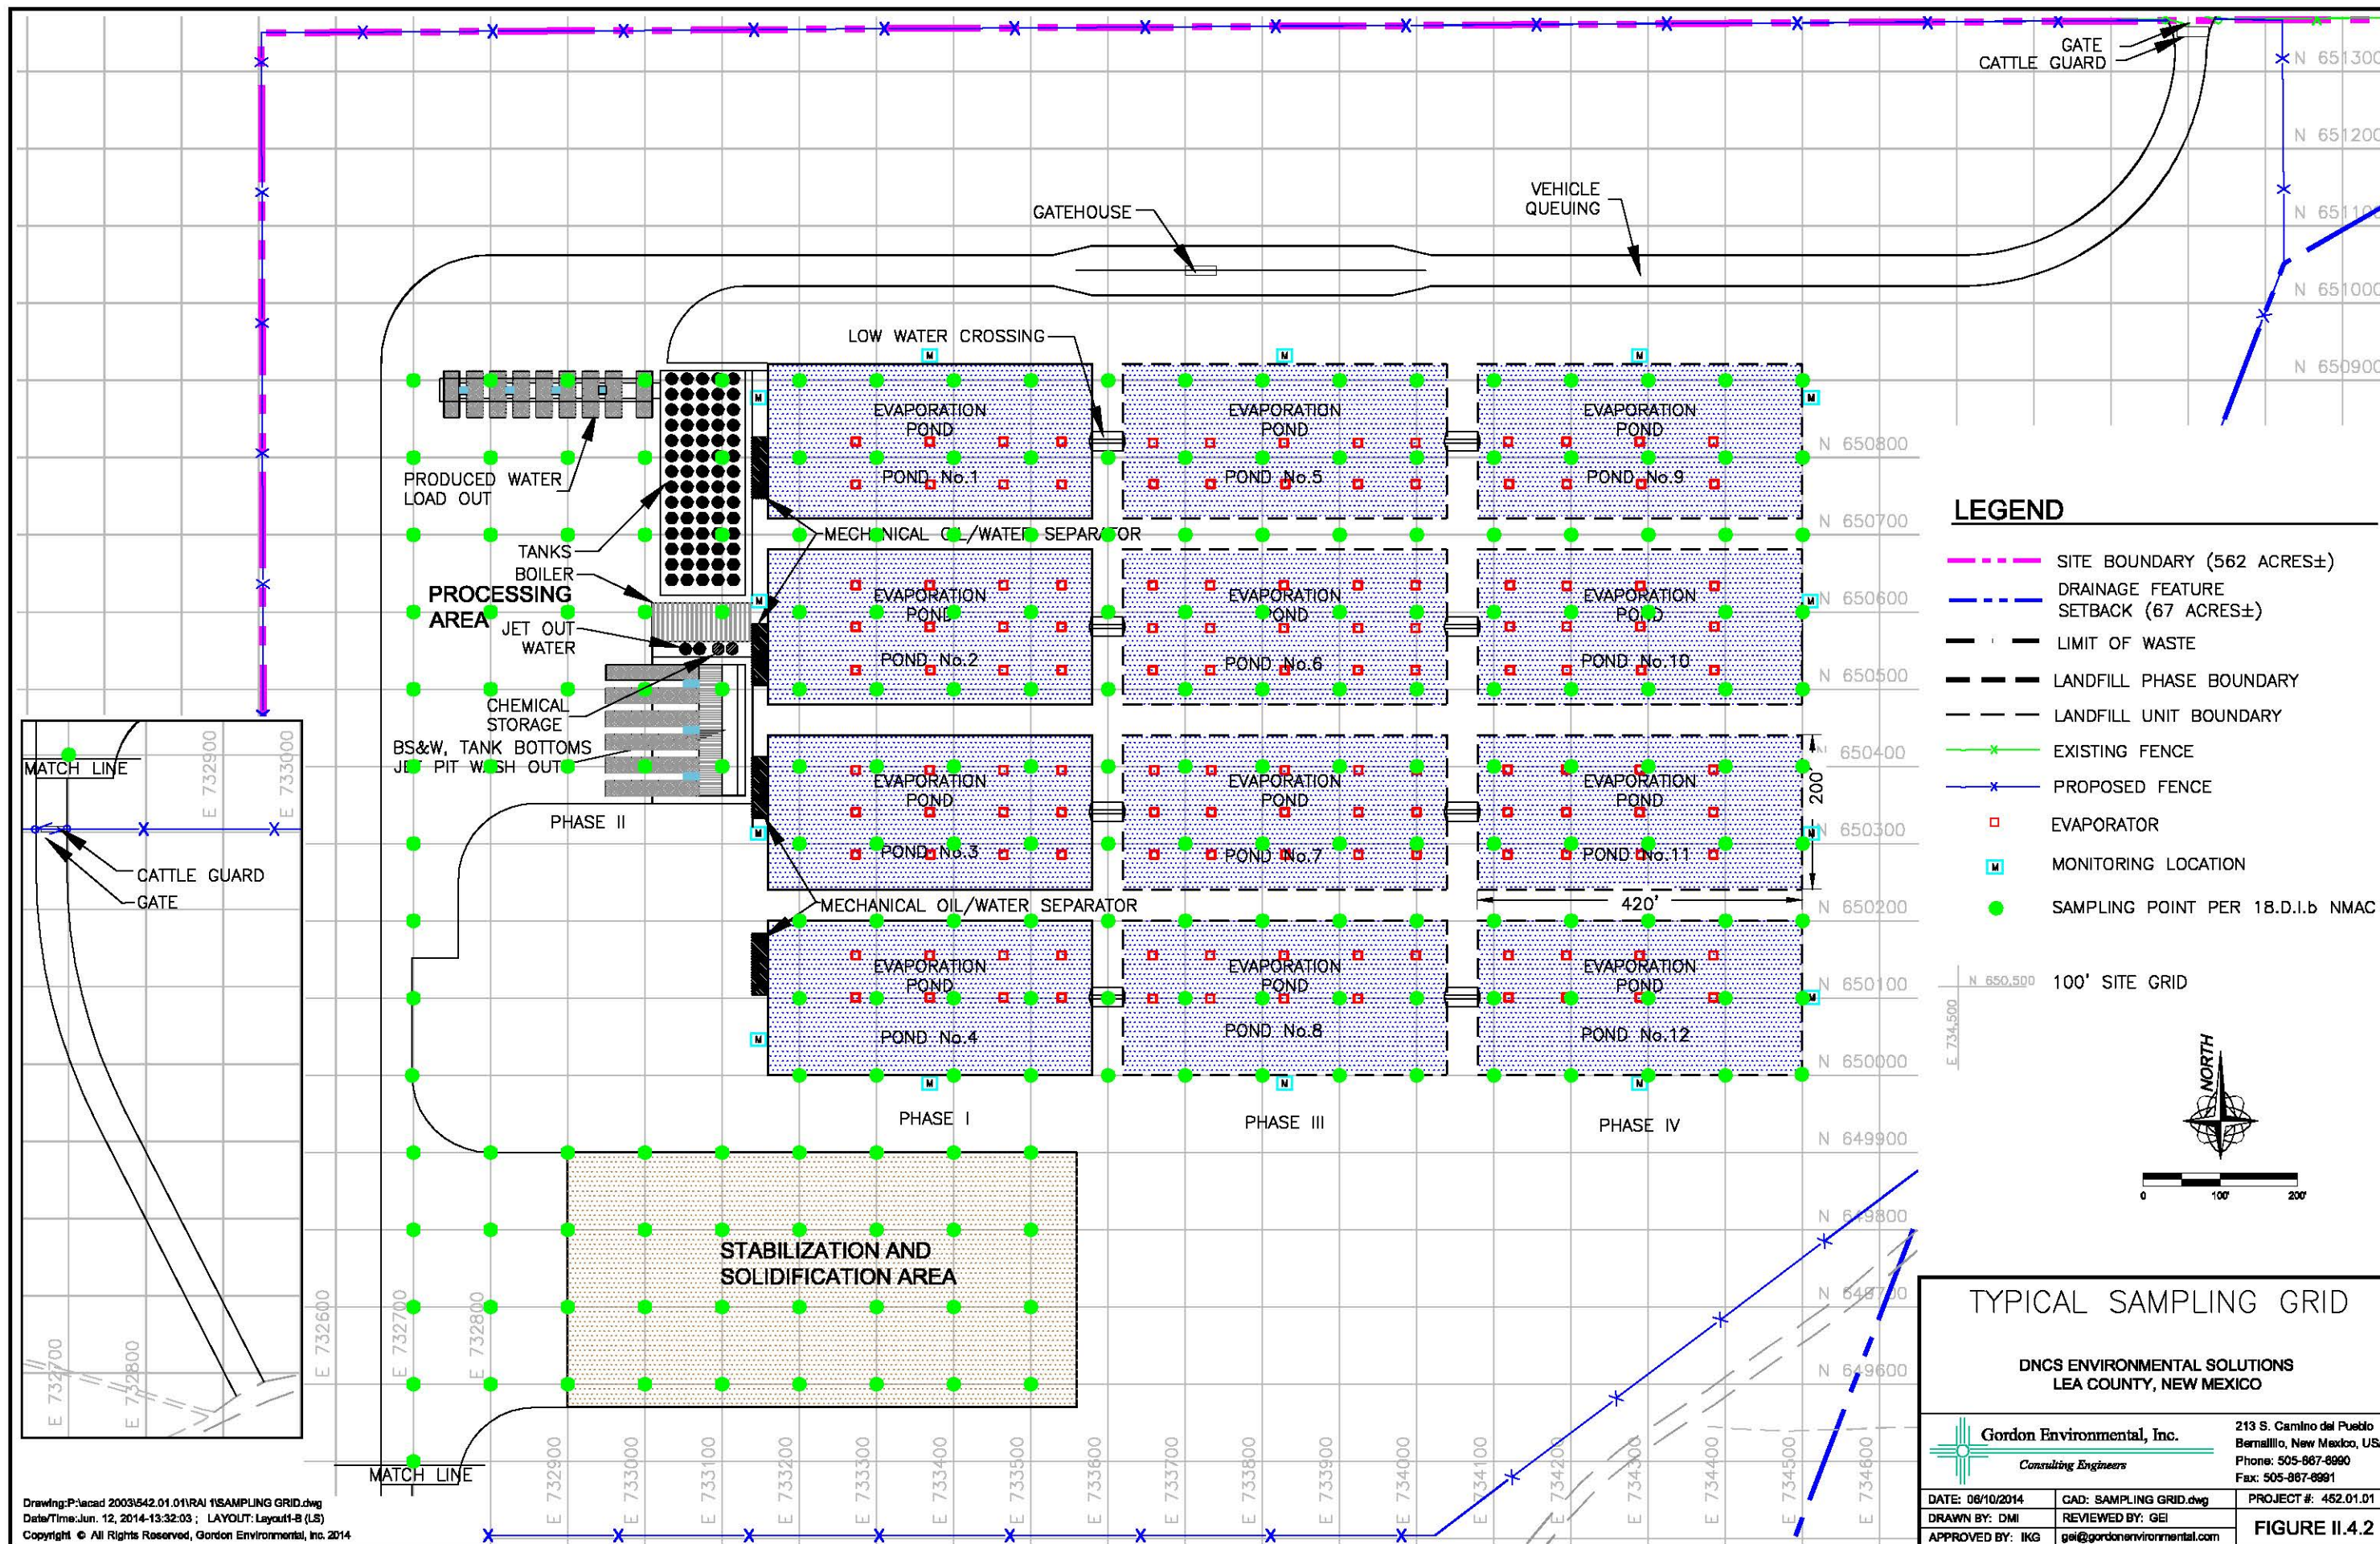

2.8 Final Site Closure – Processing Area

Upon OCD determination that no contamination is present at DNCS at regulatory thresholds, the Processing Area will be re-graded to the intended final use. Activities to be conducted during this period include:

- Submittal of Notice of Intent (NOI) to the EPA for a Construction General Permit (CGP) and Stormwater Pollution Prevention Plan (SWPPP) implementation
- Evaporation and sedimentation pond berm removal and backfilling
- Site grading and re-contouring
- Site revegetation

Re-vegetation of the DNCS site (equal to 70% of the nature perennial vegetative cover) will be conducted during the optimum planting period, whenever possible. Examples of seed types identified and recommended by the NRCS as acceptable cover for the local and are described in **Table II.4.3**. The Closure Documentation Record (**Attachment II.4.C**), or a similar template, will be used to record the field activities specific to final site closure. A licensed New Mexico Professional Engineer, experienced in environmental engineering, will supervise closure construction and certify completion of closure activities.

2.9 Solid Waste Disposal Area

It is anticipated that the DNCS Landfill will be the final area closed at the DNCS Facility due to the need for disposal of wastes from other on-site process units under premature or routine closure conditions. Final cover will be installed within one year of achieving the final waste elevations, or an intermediate grading plan approved by OCD under early closure. The overall final grading contours for the Landfill are provided in the **Permit Plans, Sheet 5**. The final cover proposed for the DNCS Landfill includes a prescriptive crown, and an alternative sideslope cover configuration. The prescriptive cover (crown) was designed in compliance with 19.15.36.14.C(8) NMAC, and consists of:

- a 12-inch erosion layer
- a 12-inch protection layer
- a 12-inch drainage layer ($k \geq 1 \times 10^{-2}$ cm/sec)
- 60-mil double-sided, textured, HDPE liner
- a 12-inch foundation layer

The alternative (evapotranspiration) cover for the sideslopes will consist of a 12-inch erosion layer; a 24-inch infiltration layer ($k \leq 5 \times 10^{-5}$ cm/sec); and a 12-inch intermediate cover layer as shown on **Figure II.4.3**. Based on the results provided in **Volume III.4** (HELP Model), the proposed alternative final cover for the sideslopes is proven to provide superior performance in preventing liquid migration through the cover when compared to the prescriptive cap outlined in the regulations; and the prescriptive design is not stable on sideslopes.

Final slopes will be constructed in accordance with the Final Grading Plan (**Permit Plans, Sheet 5**). The side slopes will be no greater than 25% (4 horizontal to 1 vertical) and the top crown will be constructed at a design grade of 5%. Details for the final cover design are shown on the **Permit Plans, Sheet 8**. The final cover, as well as other disturbed areas of the site, will be seeded with native vegetation. Vegetation on the site will be planted during the optimum planting period, whenever possible. Examples of seed types identified and recommended by the Natural Resource Conservation Service (NRCS) as acceptable cover for the local climate and precipitation include, but are not limited to:


TABLE II.4.3
NRCS Recommended Seed Mix
DNCS Environmental Solutions^{1,2,3,4}

| Grass Species | % of Mix | RATE (PLS/Acre)⁵ | Lbs. PLS/Acre⁶ |
|-----------------------------|-----------------|------------------------------------|----------------------------------|
| Bluegrama (Native) | 40 | 1.5 | 1.2 |
| Buffalograss (burs) | 10 | 16 | 3.2 |
| Green Sprangletop | 10 | 1.7 | 0.34 |
| Sand Dropseed | 10 | 0.5 | 0.1 |
| Sideoats (Vaughn) | 20 | 4.5 | 1.8 |
| Western Wheatgrass (Native) | 10 | 8 | 1.6 |
| Totals | 100% | 32.2 | 8.24 |


Notes:

1. Lea County NRCS recommends doubling the seeding rate on critical area plantings.
2. These grasses are fairly shallow rooted; well adapted to Lea County; are available from area growers; and will aid in erosion control once established.
3. NRCS recommends that seeding a cover crop of sorghum in the spring at 8 lbs/acre will stabilize the site initially.
4. Subject to change based on changes in NRCS requirements, new technology, etc.
5. PLS = pure live seed per acre
6. Lbs. = pounds of PLS per acre

60-mil DOUBLE-SIDED TEXTURED
HDPE LINER

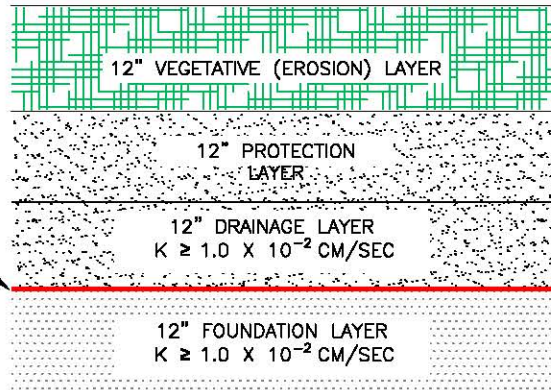

**FINAL COVER DETAIL CROWN
PRESCRIPTIVE DESIGN**

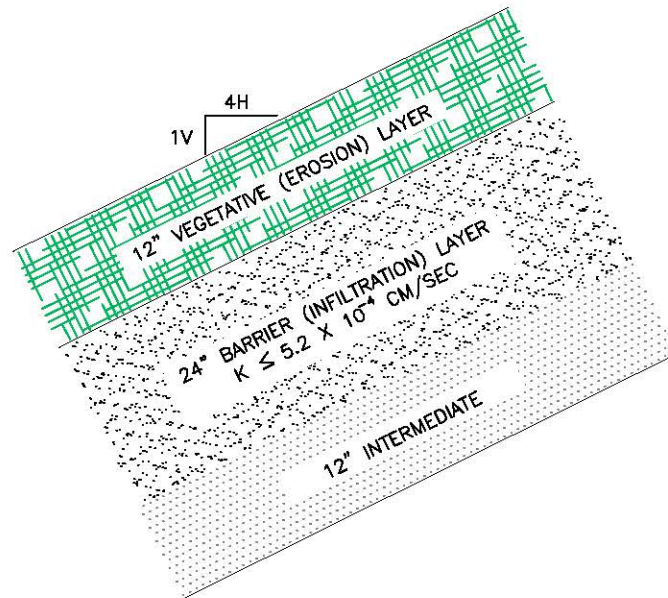

**FINAL COVER DETAIL SIDESLOPE
EVAPOTRANSPIRATION DESIGN**

FINAL COVER PROFILE

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.

Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

DATE: 10/22/2013

CAD: FINAL COVER.dwg

PROJECT #: 542.01.01

DRAWN BY: DMI

REVIEWED BY: DRT

APPROVED BY: IKG

gei@gordonenvironmental.com

FIGURE II.4.3

The Closure Documentation Record (**Attachment II.4.C**) or a similar template will be used to record the field activities specific to final site closure. Documentation of closure activities including, but not limited to, monitoring results, site inspection data, soil sampling and maintenance procedures will be submitted to OCD in the Final Closure Report. Closure construction activities will be supervised by a licensed New Mexico Professional Engineer experienced in waste facility technology, who will certify the closure.

2.10 Miscellaneous Building and Structure Removal

At this time, it is anticipated that the DNCS Facility site following closure will revert to open space or livestock grazing. Should an alternate land use be identified that could utilize the remaining structures and buildings, they will be cleaned and left in place with the exception of below-grade sumps. If not, all buildings and miscellaneous structures will be dismantled, and where practical, recycled or reused. Non-recyclable material will be disposed of in the DNCS Landfill, or other OCD-approved landfill. Once building, structures and sumps are removed, the areas will be inspected for contamination. Should contamination be discovered, the zone will be excavated and disposed of in the solid waste disposal unit, and the area will be tested until confirmed to meet regulatory standards. If the DNCS Landfill is not in operation at time of closure, remaining materials will be removed from the Facility and disposed of in an OCD-approved surface waste management facility.

2.11 Final Land Use

At this time DNCS has not established a use for the Facility after closure beyond open pasture. Should a specific use be determined, DNCS will notify OCD and request approval to be released from the following post-closure activities provided there has not been a release to the vadose zone or ground water pursuant to 19.15.30 and 19.15.29 NMAC.

3.0 POST-CLOSURE PLAN

3.1 Post-Closure Maintenance

Landfill Area

DNCS will monitor and provide post-closure maintenance for the Landfill Facility for a period of not less than 30 years. During the post-closure care period, DNCS proposes to inspect and

maintain the site at least quarterly, and immediately after a documented 24 hour, 25-year storm event, whichever is more frequent as defined on the Site Inspection Checklist (**Attachment II.4.D**). Upon successful re-vegetation efforts resulting in at least 70% coverage or other approved erosion control methods (gravel mulches, etc.), DNCS plans to reduce the inspection frequency subject to OCD approval. Post-closure care inspections will typically include:

- Vegetative growth observation
- Erosion
- Differential settlement
- Vegetative stress (i.e., potential gas migration)

In addition, vadose zone monitoring will be performed and reported on an annual basis as shown on **Attachment II.4.A.4**.

Processing Area

DNCS will conduct post-closure monitoring of the Processing Area for a period of no less than 3 years. Should deficiencies or discrepancies be discovered during the site inspections in these or other areas of the landfill, DNCS will conduct corrective measures. If there has been a documented release to the vadose zone or groundwater, DNCS will comply with the requirements of 19.15.30 and 19.15.29 NMAC.

3.2 Reporting

Reports of post-closure activities including, but not limited to site inspection data and maintenance procedures will be submitted to OCD within 45 days from the end of each calendar year or as otherwise required.

4.0 FINANCIAL ASSURANCE

4.1 Closure/Post Closure Cost Estimate

The Cost Estimate (**Attachment II.4.A**) for the closure and post-closure activities described in this C/PC Plan is presented in current dollars and conservatively assumes that third party contractors will perform closure and post closure activities at the site, as required by 19.15.36.8.C.(9) NMAC. Preparation of the C/PC Cost Estimate also assumes that no contamination or remedial activities are required due to releases into the environment. The

current estimate for Phase I (**Table II.4.1**) of DNCS closure construction and post-closure operations and is provided as **Attachment II.4.A**.

This estimate will be revised accordingly as additional Phases (**Table II.4.1**) of DNCS construction and operations are implemented, or should unforeseen conditions arise, as well as annually once Phase Development is complete. Upon Division approval of the requested permit, DNCS will elect a financial assurance mechanism pursuant to 19.15.36.11.E NMAC and submit the appropriate documentation to OCD based on the estimates provided in this Plan.

4.2 Release of Financial Assurance

Upon successful completion of closure activities for the entire Facility, or portions of the operation (i.e., sections of the Landfill that have reached final grade; components of the process that have ceased operation); and after OCD concurrence, DNCS will request the release of the financial assurance mechanism in-place for that component of closure of the Facility. After the post-closure periods have expired (i.e., 3 years for waste processing pits/ponds, and 30 years for the Landfill), provided there is no contamination evident and the site has established re-vegetation in accordance with the regulations, DNCS will request release from the remaining financial assurance requirements for the Facility or portions that have been successfully closed.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

**ATTACHMENT II.4.A
CLOSURE/POST-CLOSURE COST ESTIMATES**

ATTACHMENT II.4.A.1
PHASE I CLOSURE/POST-CLOSURE
COST ESTIMATE SUMMARY
DNCS Environmental Solutions

| TASK | COST ESTIMATE |
|---|----------------------|
| 1.0 LANDFILL CLOSURE CONSTRUCTION | \$282,648 |
| 2.0 LANDFILL MAINTENANCE | \$448,800 |
| 3.0 ENVIRONMENTAL MONITORING | \$125,400 |
| 4.0 POND AND PROCESSING AREA CLOSURE (see Att. II.4.A.5) | \$406,954 |
| 5.0 PROCESSING AREA MAINTENANCE | \$62,040 |
| TOTAL COST ESTIMATE | \$1,325,842 |

ATTACHMENT II.4.A.2
PHASE I LANDFILL CLOSURE CONSTRUCTION
CLOSURE COST ESTIMATE
DNCS Environmental Solutions Landfill (Unit 1 - 13.5 acres ±)

| TASK 1.0 | Unit Quantity | Unit | Unit Cost | Total Cost |
|--|--------------------------|-------------|----------------------|-----------------------|
| 1.1 Final Cover Installation | | | | |
| 1.1.1 Install and compact 24" Infiltration (Barrier) Layer | 43,516 | CY | \$3.50 | \$152,308 |
| 1.1.2 Install 12" Erosion (Vegetative) Layer | 21,758 | CY | \$2.50 | \$54,396 |
| 1.1.3 Vegetative Layer Seeding (Class A) | 13.5 | AC | \$1,500.00 | \$20,250 |
| Task Subtotal | | | | \$226,953 |
| 1.2 Final Cover CQA | | | | |
| 1.2.1 Inspection and Testing | 1 | LS | \$25,000 | \$25,000 |
| 1.2.2 Certification | 1 | LS | \$5,000 | \$5,000 |
| Task Subtotal | | | | \$30,000 |
| TASK TOTALS | | | | \$256,953 |
| Independent Project Manager and Contract Administration Cost (10% of Task Totals) | | | | \$25,695 |
| TOTAL COST | | | | \$282,648 |

Notes:

- Phase I closure costs are based on contracting with a qualified third party to complete and certify closure. The activities included in this cost estimate are based on current dollars, previous experience with landfills located in arid climates, and current subcontractor costs.
- Final cover installation costs assume that:
 - ▶ The greatest area requiring final cover is 13.5 acres ± (Unit 1).
 - ▶ 12" of intermediate cover is already installed.
 - ▶ All soils necessary for closure are available on-site.
- CY = Cubic Yard
AC = Acre
LS = Lump Sum
- Due to the perimeter location there is no final cover "crown", and related geosynthetic layers in Unit 1.

ATTACHMENT II.4.A.3
PHASE I LANDFILL MAINTENANCE
POST-CLOSURE COST ESTIMATE
DNCS Environmental Solutions

| TASK 2.0 | Unit Quantity | Unit | Unit Cost | Total Cost Per Year | Total Cost For 30 Years |
|--|------------------|-----------|--------------|--------------------------------|------------------------------------|
| 2.1 Final Cover Inspection and Reporting | | | | | |
| 2.1.1 Inspection | 2 | events/yr | \$1,000 | \$2,000 | \$60,000 |
| 2.1.2 Recordkeeping and Reporting | 2 | events/yr | \$400 | \$800 | \$24,000 |
| <i>Task Subtotals</i> | | | | \$2,800 | \$84,000 |
| 2.2 Final Cover Maintenance | | | | | |
| 2.2.1 Cover Maintenance | 1 | AC/yr | \$1,000 | \$1,000 | \$30,000 |
| 2.2.2 Vegetation | 2 | AC/yr | \$1,500 | \$3,000 | \$90,000 |
| <i>Task Subtotals</i> | | | | \$4,000 | \$120,000 |
| 2.3 Leachate System | | | | | |
| 2.3.1 Inspection/Repair | 1 | LS | \$400 | \$400 | \$12,000 |
| 2.3.2 Disposal | 4 | events/yr | \$1,000 | \$4,000 | \$120,000 |
| <i>Task Subtotals</i> | | | | \$4,400 | \$132,000 |
| 2.4 Surface Water Management Systems | | | | | |
| 2.4.1 Inspection/Repairs | 2 | events/yr | \$600 | \$1,200 | \$36,000 |
| <i>Task Subtotals</i> | | | | \$1,200 | \$36,000 |
| 2.5 Fencing | | | | | |
| 2.5.1 Inspection/Repairs | 2 | events/yr | \$600 | \$1,200 | \$36,000 |
| <i>Task Subtotals</i> | | | | \$1,200 | \$36,000 |
| TASK TOTALS | | | | \$13,600 | \$408,000 |
| Independent Project Manager and Contract Administration Cost (10% of Task Totals) | | | | \$1,360 | \$40,800 |
| TOTAL COST | | | | \$13,600 | \$448,800 |

Notes:

1. Phase I post-closure maintenance costs are based on contracting with a qualified third party to conduct post-closure care maintenance for the landfill. The activities included in this cost estimate are based on current dollars, previous experience with landfills located in arid climates, and current subcontractor costs.
2. AC = Acre
LS = Lump Sum

ATTACHMENT II.4.A.4
PHASE I ENVIRONMENTAL MONITORING
POST-CLOSURE COST ESTIMATE
DNCS Environmental Solutions

| TASK 3.0 | Unit Quantity | Unit | Unit Cost | Total Cost Per Year | Total Cost |
|--|--------------------------|-------------|----------------------|--------------------------------|-----------------------|
| 3.1 Landfill Gas Monitoring³ | | | | | |
| 3.1.1 Field Services/Reporting (30 years) | 0 | events/yr | \$0 | \$0 | \$0 |
| Task Subtotal | | | | \$0 | \$0 |
| 3.2 Vadose Zone Monitoring | | | | | |
| 3.2.1 Field Services/Lab Analysis/Reporting (30 years) | 1 | events/yr | \$2,300 | \$2,300 | \$69,000 |
| Task Subtotal | | | | \$2,300 | \$69,000 |
| 3.3 NPDES Monitoring | | | | | |
| 3.3.1 Field Services/Reporting (30 years) | 1 | LS | \$1,500 | \$1,500 | \$45,000 |
| Task Subtotal | | | | \$1,500 | \$45,000 |
| TASK TOTALS | | | | \$3,800 | \$114,000 |
| Independent Project Manager and Contract Administration Cost (10% of Task Totals) | | | | \$380 | \$11,400 |
| TOTAL COST | | | | \$4,180 | \$125,400 |

Notes:

1. Phase I closure costs are based on contracting with a qualified third party to conduct post-closure monitoring for the landfill.
The activities included in this cost estimate are based on current dollars, previous experience with landfills located in arid climates, and current subcontractor costs.
2. Assume no water in vadose wells (i.e., sampling and analysis costs not included).
3. Included with Task 3.2.
4. LS = Lump Sum

ATTACHMENT II.4.A.5
PHASE I POND AND PROCESSING AREA CLOSURE CONSTRUCTION
CLOSURE COST ESTIMATE
DNCS Environmental Solutions

| Task 4.0 | Units | Unit Cost | Total (28 acres) | |
|---|-----------------|----------------------|------------------|-------------------|
| | | | Quantity | Cost |
| 4.1 Evaporation Pond | | | | |
| 4.1.1 Liquids Transport/Disposal | | | | |
| 4.1.1.1 Transport Liquid | bbl | \$1.75 | 240 | \$ 420 |
| 4.1.1.2 Disposal Liquids | bbl | \$0.95 | 240 | \$ 228 |
| 4.1.1.3 Remove/Transport Sludge | ton | \$6.50 | 4,840 | \$ 31,460 |
| 4.1.1.4 Disposal Sludge | ton | \$15.00 | 4,840 | \$ 72,600 |
| 4.1.1.5 Liner Removal/Transport | yd ³ | \$4.00 | 200 | \$ 800 |
| 4.1.1.6 Disposal Liner | yd ³ | \$4.25 | 200 | \$ 850 |
| | | Task Subtotal | | \$ 106,358 |
| 4.1.2 Pond Backfill and Contouring | | | | |
| 4.1.2.1 Soil On-site | yd ³ | \$1.00 | 0 | \$ - |
| 4.1.2.2 Place and Compact Soil | yd ³ | \$3.00 | 15,000 | \$ 45,000 |
| | | Task Subtotal | | \$ 45,000 |
| 4.1.3 Sampling | each | \$200 | 300 | \$ 60,000 |
| 4.1.4 Seeding | acres | \$1,200 | 28 | \$ 33,600 |
| | | Task Subtotal | | \$ 93,600 |
| Pond Closure Subtotal: | | | | \$ 244,958 |
| 4.2 Site Work | | | | |
| 4.2.1 Tank Removal | Lump Sum | | | \$ 25,000 |
| 4.2.2 Building Removal | Lump Sum | | | \$ 25,000 |
| 4.2.3 Process Equipment Removal | Lump Sum | | | \$ 25,000 |
| 4.2.4 Earthwork | Lump Sum | | | \$ 10,000 |
| Site Work Subtotal: | | | | \$ 85,000 |
| 4.3 Engineering | | | | |
| 4.3.1 CQA/Certification | Lump Sum | | | \$ 40,000 |
| Engineering Subtotal: | Lump Sum | | | \$ 40,000 |
| 4.4 Totals | | | | |
| 4.4.1 Subtotal | | | | \$ 369,958 |
| 4.4.2 Administration Cost (10%) | | | | \$ 36,996 |
| Total: | | | | \$ 406,954 |

Notes:

1. Phase I closure costs are based on contracting with a qualified third party to complete and certify closure.
2. Assume 1,000 gallons of residual water in each pond transported up to 50 miles for disposal.
3. Assume 6" of sludge remaining in each pond at closure transported up to 50 miles for disposal.
4. Site Sampling is conducted during the CQA phase.

ATTACHMENT II.4.A.6
PROCESS AREA MAINTENANCE
POST-CLOSURE COST ESTIMATE
DNCS Environmental Solutions

| TASK 5.0 | Unit Quantity | Unit | Unit Cost | Total Cost Per Year | Total Cost For 3 Years |
|---|--------------------------|-------------|----------------------|--------------------------------|-----------------------------------|
| 5.1 Surface Inspection and Reporting | | | | | |
| 5.1.1 Inspection | 2 | events/yr | \$1,000 | \$2,000 | \$6,000 |
| 5.1.2 Recordkeeping and Reporting | 2 | events/yr | \$400 | \$800 | \$2,400 |
| Task Subtotals | | | | \$2,800 | \$8,400 |
| 5.2 Surface Maintenance | | | | | |
| 5.2.1 Cover Maintenance | 1 | AC/yr | \$1,000 | \$1,000 | \$3,000 |
| 5.2.2 Vegetation | 2 | AC/yr | \$1,500 | \$3,000 | \$9,000 |
| Task Subtotals | | | | \$4,000 | \$12,000 |
| 5.3 Fencing | | | | | |
| 5.3.1 Inspection/Repairs | 2 | events/yr | \$600 | \$1,200 | \$3,600 |
| Task Subtotals | | | | \$1,200 | \$36,000 |
| TASK TOTALS | | | | \$8,000 | \$56,400 |
| Independent Project Manager and Contract Administration Cost (@ 10%) | | | | \$800 | \$5,640 |
| TOTAL COST | | | | \$8,000 | \$62,040 |

Notes:

1. Phase I post-closure maintenance costs are based on contracting with a qualified third party to conduct post-closure care maintenance for the Processing Area. The activities included in this cost estimate are based on current dollars, previous experience with closures located in arid climates, and current subcontractor costs.
2. AC = Acre
LS = Lump Sum

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

**ATTACHMENT II.4.B
FINANCIAL ASSURANCE DOCUMENTATION
TO BE PROVIDED UPON PERMIT APPROVAL**

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

**ATTACHMENT II.4.C
CLOSURE DOCUMENTATION RECORD (TYPICAL)**

ATTACHMENT II.4.C
Closure Documentation Record (Typical)
DNCS Environmental Solutions

[illegible]

Date: _____

Recorded By: _____

Inspected By: _____

Certified By: _____

Comments: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 4: CLOSURE/POST-CLOSURE PLAN**

**ATTACHMENT II.4.D
SITE INSPECTION CHECKLIST (TYPICAL)**

ATTACHMENT II.4.D
Post-Closure Site Inspection Checklist (Typical)
DNCS Environmental Solutions

Page ____ of ____

Date: _____

Inspector(s): _____

Time: _____

Weather:

Temperature _____ deg. F

Precipitation (last 24 hours) _____ inches

Skies _____

Wind Speed _____ mph

Wind Direction _____ (direction blowing from)

NOTES:

"X" indicates that a Deficiency has been noted. "P" indicates that a Photograph has been taken. "S" indicates that a Sample has been collected. Complete descriptions of Deficiencies, Photographs, and Samples are provided on attached pages. Items are referenced by Location.

Vegetation Condition

| Location | Item | | | |
|----------|-------------------|--------------------|---------|--------|
| | Vegetation Stress | Vegetation Dieback | Vectors | Sample |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Surface Water Management System

| Location | Deficiency | | | Sample |
|----------|-----------------------|----------------------|---------------------|--------|
| | Erosion/ Siltation | Structural Defect | Flow Obstruction | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

NOTES: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-------------|
| 1.0 | INTRODUCTION | II.5-1 |
| 1.1 | Site Location | II.5-1 |
| 1.2 | Facility Description..... | II.5-1 |
| 1.3 | Purpose..... | II.5-4 |
| 2.0 | EMERGENCY COORDINATORS | II.5-5 |
| 3.0 | PREVENTION MEASURES | II.5-8 |
| 3.1 | Waste Inspection and Screening | II.5-8 |
| 3.2 | Fire Prevention and Preparedness | II.5-9 |
| 4.0 | IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION | II.5-9 |
| 4.1 | Implementation | II.5-9 |
| 4.1.1 | Fires/Explosions..... | II.5-12 |
| 4.1.2 | Spills/Releases | II.5-12 |
| 4.2 | Assessment..... | II.5-12 |
| 4.2.1 | Site Evacuation Plan | II.5-14 |
| 4.3 | Notification of Authorities | II.5-17 |
| 5.0 | CONTROL PROCEDURES..... | II.5-18 |
| 5.1 | Fire Control Guidelines..... | II.5-19 |
| 5.2 | Spills/Release Control Guidelines | II.5-20 |
| 5.3 | Clean, Replace, and Inspect Equipment | II.5-22 |
| 6.0 | STORAGE AND TREATMENT OF RELEASED MATERIALS | II.5-22 |
| 7.0 | EMERGENCY EQUIPMENT..... | II.5-22 |
| 7.1 | Internal Communications..... | II.5-23 |
| 7.2 | External Communications..... | II.5-23 |
| 7.3 | Fire Prevention..... | II.5-23 |
| 7.4 | Personnel Protection, First Aid, and Safety Equipment | II.5-23 |
| 7.5 | Spill Response Equipment | II.5-24 |
| 8.0 | RECORDKEEPING | II.5-24 |
| 9.0 | COORDINATION AGREEMENTS | II.5-25 |
| 10.0 | PLAN AMENDMENT | II.5-25 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|----------------------------|-------------|
| II.5.1 | SITE LOCATION MAP | II.5-2 |
| II.5.2 | SITE PLAN..... | II.5-3 |
| II.5.3 | SITE EVACUATION PLAN | II.5-15 |
| II.5.4 | HOSPITAL LOCATION..... | II.5-16 |

LIST OF TABLES

| Table No. | Title | Page |
|------------------|---|-------------|
| II.5.1 | PROPOSED FACILITIES..... | II.5-4 |
| II.5.2 | EMERGENCY RESPONSE AGENCIES AND CONTACTS | II.5-6 |
| II.5.3 | DEFINITIONS..... | II.5-7 |
| II.5.4 | LIST OF EMERGENCY COORDINATORS..... | II.5-8 |
| II.5.5 | EMERGENCY RESPONSE EQUIPMENT LIST | II.5-10 |
| II.5.6 | IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION PROCEDURES FOR RELEASES | II.5-11 |
| II.5.7 | PART 29 RELEASE NOTIFICATION..... | II.5-13 |
| II.5.8 | EVACUATION PROCEDURES | II.5-14 |
| II.5.9 | FIRE/EXPLOSION: CONTROL GUIDELINES..... | II.5-19 |
| II.5.10 | Spill/RELEASE: CONTROL GUIDELINES | II.5-21 |

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|---|
| II.5.A | REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE, OCD FORM C-138 |
| II.5.B | INCIDENT REPORT FORM (TYPICAL) |
| II.5.C | RELEASE NOTIFICATION AND CORRECTION ACTION OCD FORM C-141 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.5.1**). Site access will be provided via the south side of NM 529.

1.2 Facility Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components; a liquid oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Plan provided as **Figure II.5.2** identifies the locations of the Processing Area and Landfill facilities. The proposed facilities are detailed in **Table II.5.1**, and are anticipated to be developed in four primary phases.

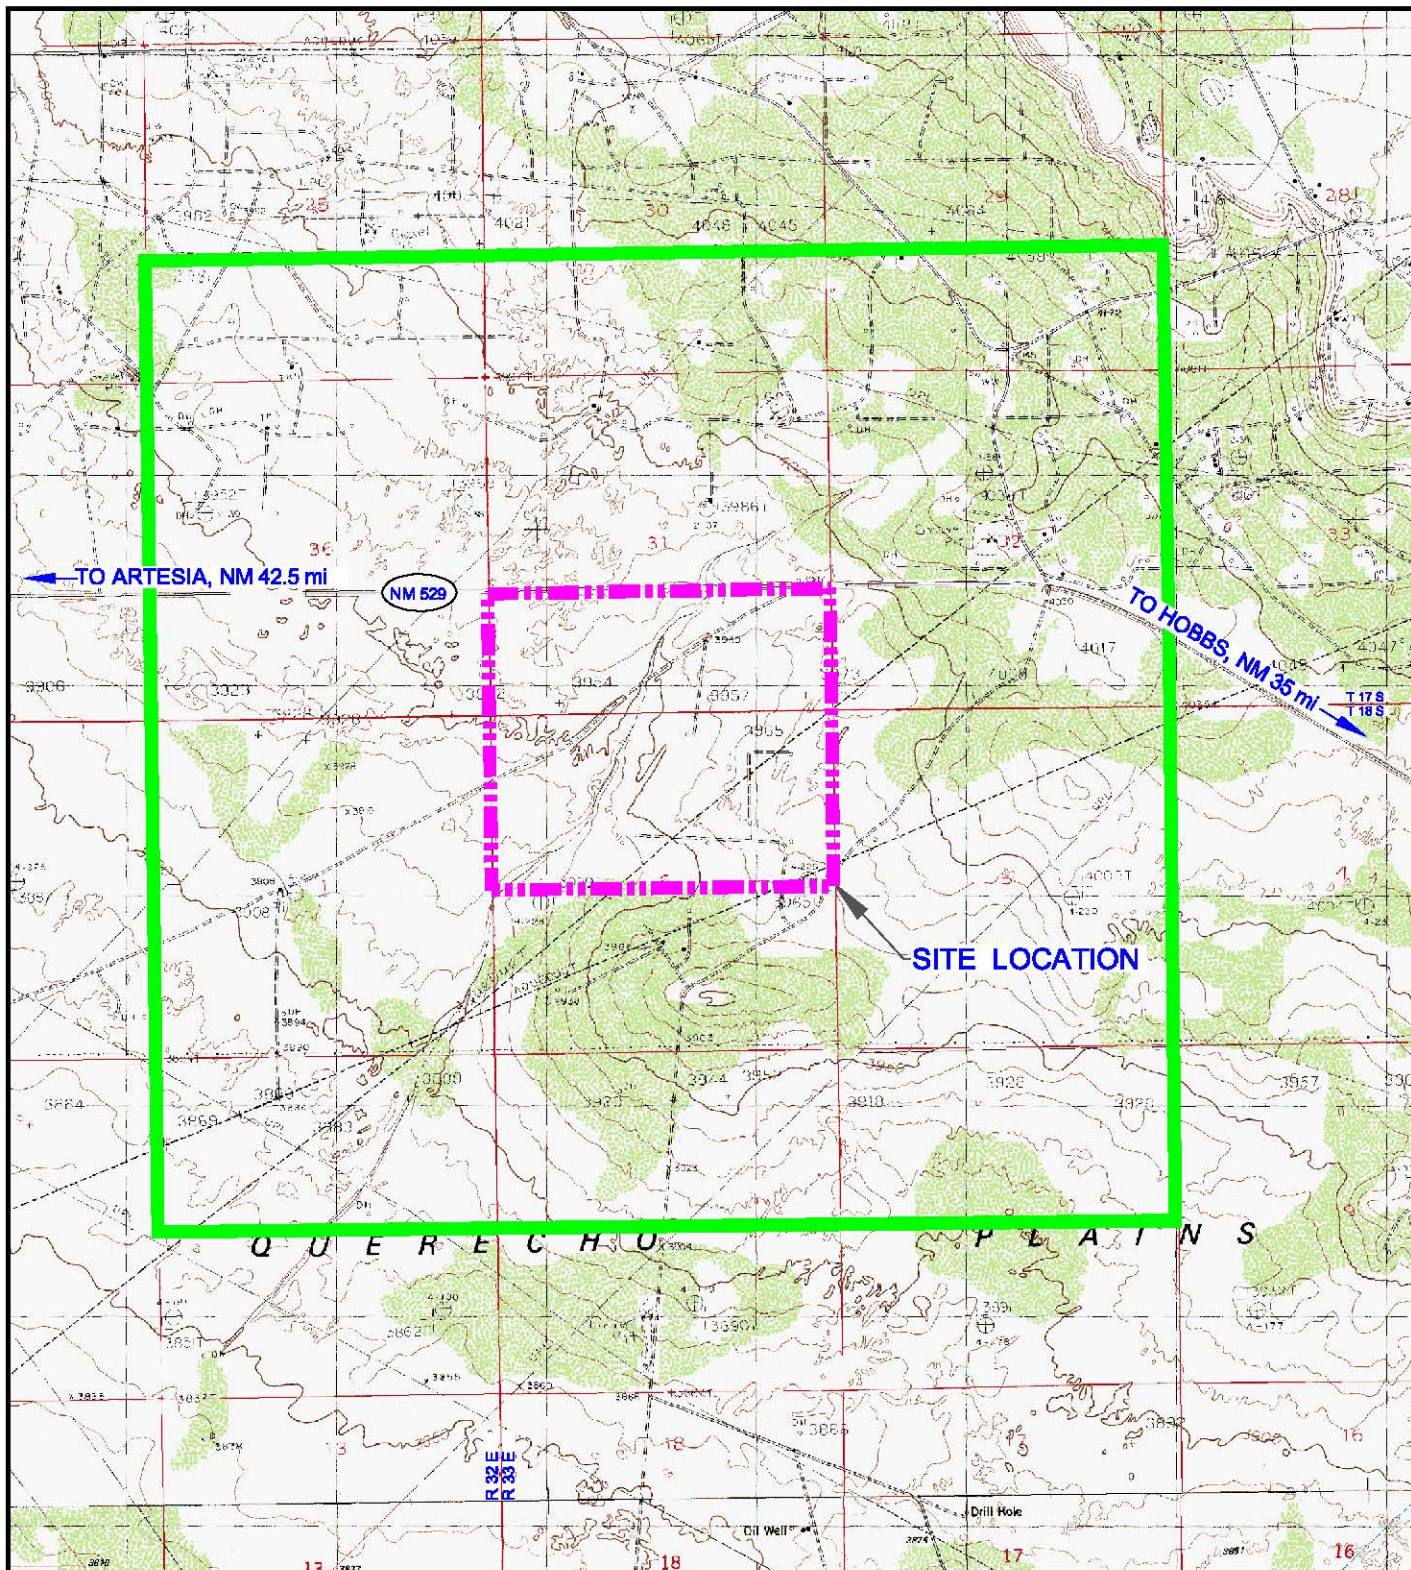


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:51:58 ; LAYOUT: A(P)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.5.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

TABLE II.5.1
Proposed Facilities¹
DNCS Environmental Solutions

| Description | No. |
|---------------------------------------|------------|
| Oil field waste disposal landfill | 1 |
| Produced water load-out points | 9 |
| Produced water receiving tanks | 12 |
| Produced water settling tanks | 48 |
| Mechanical oil/water separator unit | 4 |
| Evaporation ponds | 12 |
| Stabilization and Solidification Area | 1 |
| Oil treatment plant | 1 |
| Crude oil receiving tanks | 5 |
| Oil sales tanks | 5 |
| Customer jet wash | 1 (6 bays) |

Note:

¹*Subject to change. The proposed facilities are based on projected waste types and volumes; therefore this list may be modified in response to changes in waste streams, technology, etc.*

1.3 Purpose

This document has been prepared to address the requirements of 19.15.36.13.N NMAC which specify that each operator of a surface waste management facility must prepare and have available a Contingency Plan (the Plan). This Plan is designed to minimize hazards to fresh water, public health, safety or the environment from fires, explosions or an unplanned sudden or non-sudden release of contaminants or oil field waste to air, soil, surface water or ground water. Applicable provisions of this Plan will be implemented immediately whenever there is a fire, explosion or release of contaminants or oil field waste constituents that could threaten fresh water, public health, safety or the environment. This Plan is supplemented by the H₂S Prevention and Contingency Plan (**Volume II.3**), as a cross-reference.

This Plan is organized for easy reference by Facility personnel, whom will be required to read it. Copies of this Plan will be maintained in a readily accessible location at the Landfill Scalehouse and the Processing Area Gatehouse. In addition, copies of the Plan will be made available to the emergency agencies identified in **Table II.5.2**. Agencies listed on **Table II.5.2** will be invited to the site for the purposes of familiarizing themselves with the Facility and reviewing the Plan's contents with DNCS (19.15.36.13.N.(2) NMAC). As detailed in Section 10 of this Plan, whenever significant changes to the Plan are made, revised copies of the Plan will replace existing copies, and the agencies listed in **Table II.5.2** will be provided with the most recent Plan updates. Definitions specific to this Plan are provided in **Table II.5.3** as specified in 19.15.2.7 NMAC, and a more comprehensive list of definitions is included as **Table I.5 (Volume I)**.

2.0 EMERGENCY COORDINATORS

DNCS has designated specific individuals with the responsibility and authority to implement response measures in the event of an emergency which may threaten freshwater, public health, safety or the environment per 19.15.36.13.N.(3) NMAC. The Primary, Alternate, and On-site Emergency Coordinators (ECs; **Table II.5.4**) will be thoroughly familiar with aspects of this Plan; operations and activities at the DNCS Facility; location and characteristics of waste to be managed; the location of records within the Facility; and the Facility layout. **Table II.5.4** lists the names, designations, titles, and phone numbers for each EC, each of whom will be designated prior to Facility operations, as notified and updated to OCD.

The ECs are responsible for coordinating emergency response measures and have the authority to commit the resources required for implementation of this Plan. A designated EC is available to respond to emergencies 24 hours a day, 7 days a week. The DNCS employee who identifies an emergency situation will contact an EC directly or via phone. Contact will be attempted with each EC (Primary, Alternate, and the On-site) until communication is achieved (**Table II.5.4**). Upon arrival at the scene of an emergency, the first EC to arrive will assume responsibility for initiating response measures. If more than one EC responds, authority is assigned to the highest-ranking EC.

TABLE II.5.2
Emergency Response Agencies and Contacts
DNCS Environmental Solutions

| Agency/Organization | Emergency Number |
|---|-------------------------|
| 1. Fire | |
| Maljamar Fire Department | 911 or (575) 676-4100 |
| 2. Police | |
| Lea County Sheriff's Department | 911 or (575) 396-3611 |
| New Mexico State Police | 911 or (575) 392-5580 |
| 3. Medical/Ambulance | |
| Lea County EMS | 911 |
| Lea Regional Medical Center | (575) 492-5000 |
| 5419 N. Lovington Highway | |
| Hobbs, NM 88240 | |
| 4. Response Firm | |
| Phoenix Environmental, LLC. | (575) 391-9685 |
| 2113 N French Drive | |
| Hobbs, NM 88240 | |
| 5. OCD Emergency Response Contacts | |
| Oil Conservation Division | (575) 393-6161 |
| 1625 N. French Drive | |
| Hobbs, NM 88240 | |
| Mobile Phone | (575) 370-3180 |
| Oil Conservation Division | (505) 476-3440 |
| 1220 South St. Francis Drive | |
| Santa Fe, NM 87505 | |
| 6. State Emergency Response Contacts | |
| Environmental Emergencies 24 hr. (NMED) | (505) 827-9329 |
| New Mexico Environment Department | (505) 827-0197 |
| Solid Waste Bureau, Santa Fe | |
| 7. Local Emergency Response Contacts | |
| Lea County Emergency Management | (575) 391-2983 |
| 8. Federal Emergency Response Contacts | |
| National Emergency Response Center | |
| (U.S. Coast Guard) | (800) 424-8802 |
| Region VI Emergency Response Hotline | |
| (USEPA) | (214) 665-2200 |

TABLE II.5.3
Definitions
DNCS Environmental Solutions

- Barrel:** *shall mean 42 United States gallons measured at 60 degrees Fahrenheit and atmospheric pressure at the sea level. [19.15.2.7.B.(3) NMAC]*
- Division:** *shall mean the New Mexico energy, minerals and natural resources department, oil conservation division. [19.15.2.7.D.(4) NMAC]*
- Fresh water:** *(to be protected) includes the water in lakes and playas (regardless of quality, unless the water exceeds 10,000 mg/l TDS and it can be shown that degradation of the particular water body will not adversely affect hydrologically connected fresh ground water), the surface waters of streams regardless of the water quality within a given reach, and underground waters containing 10,000 mg/l or less of TDS except for which, after notice and hearing, it is found there is no present or reasonably foreseeable beneficial use that contamination of such waters would impair. [19.15.2.7.F.(3) NMAC]*
- Hazard to public health:**
exists when water that is used or is reasonably expected to be used in the future as a human drinking water supply exceeds at the time and place of the use, one or more of the numerical standards of Subsection A of 20.6.2.3103 NMAC, or the naturally occurring concentrations, whichever is higher, or if a toxic pollutant as defined at Subsection WW of 20.6.2.7 NMAC affecting human health is present in the water. In determining whether a release would cause a hazard to public health to exist, the director investigates and considers the purification and dilution reasonably expected to occur from the time and place of release to the time and place of withdrawal for use as human drinking water. [19.15.2.7.H.(2) NMAC]
- Oil field waste:**
shall mean waste generated in conjunction with the exploration for, drilling for, production of, refining of, processing of, gathering of or transportation of oil, gas or carbon dioxide;-waste generated from oil field service company operations; and waste generated from oil field remediation or abatement activity regardless of the date of release. Oil field waste does not include waste not generally associated with oil and gas industry operations such as tires, appliances or ordinary garbage or refuse unless generated at a division-regulated facility, and does not include sewage, regardless of the source. [19.15.2.7.O.(3) NMAC]
- Release:** *shall mean all breaks, leaks, spills, releases, fires or blowouts involving oil, produced water, condensate, drilling fluids, completion fluids or other chemical or contaminant or mixture thereof, including oil field wastes and gases to the environment. [19.15.2.7.R.(4) NMAC]*
- Waste (non-hazardous):**
Non-hazardous waste shall mean non-exempt oil field waste that is not hazardous waste. [19.15.2.7.W.(1) NMAC]

TABLE II.5.4
List of Emergency Coordinators
DNCS Environmental Solutions

Primary Emergency Coordinator

| | |
|--------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Manager</u> | Mobile Phone: <u>(575) TBD</u> |

Alternate Emergency Coordinator

| | |
|---------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Operator</u> | Mobile Phone: <u>(575) TBD</u> |

Onsite Emergency Coordinator

| | |
|---------------------------------|--------------------------------|
| Name: <u>TBD</u> | Work Phone: <u>(575) TBD</u> |
| Title: <u>Facility Operator</u> | Mobile Phone: <u>(575) TBD</u> |

**To be determined (TBD)*

In the rare case that an EC cannot be contacted in an emergency, the DNCS employee who identifies the situation should make every effort to follow the emergency procedures outlined in this Plan until an EC or emergency authority (local, state, or federal; **Table II.5.2**) arrives to assist or take control. The term “EC” as used throughout this Plan, references the responsible Emergency Coordinator at the scene of an emergency regardless of whether that EC is the Primary, Alternate, On-site EC, or EC designee. This Plan will be amended as described in Section 10.0, if the list of ECs changes.

3.0 PREVENTION MEASURES

3.1 Waste Inspection and Screening

RCRA-exempt oil field wastes will be accepted at the DNCS Facility. It is unlikely that defined hazardous wastes will be delivered to this Facility, and DNCS will implement a waste inspection and screening program at the Processing Area Gatehouse and Landfill Scalehouse to preclude acceptance of unauthorized wastes as described in the Oil Field Waste Management Plan (**Volume II.2**). The OCD Form C-138 (Request for Approval to Accept Solid Waste) is provided as **Attachment II.5.A**, which identifies the documentation required for each generator to certify the waste characteristics. It is possible that hazardous materials could become a concern if they arrive with other typical waste materials (19.15.36.13.N.(6) NMAC). If this occurs, the generator will be notified and the entire load will be rejected and returned for proper management. The waste inspection and screening program has been established in order to identify hazardous materials before they become a health and safety liability.

3.2 Fire Prevention and Preparedness

DNCS will implement a program of fire preventative and preparedness measures, as well as employee training. Preventive measures taken to avoid fires will include regular inspections of incoming vehicles to identify incompatible or problematic wastes, and indication of suspect loads.

A list of available emergency response equipment is provided in **Table II.5.5** in accordance with the requirements of 19.15.36.13.N.(4) NMAC. Control preparation procedures for potential fire emergencies include:

- Placement and maintenance of ABC-type fire extinguishers in structures and equipment.
- Implementation of a site-wide communication network to optimize mobilization of appropriate response personnel and equipment.
- Well established emergency response procedures, documented and posted at the Gate House and provided to each employee on a laminated pocket cards.

Employee fire prevention and preparedness training will include the following:

- Training of equipment operators to identify suspect incompatible problematic wastes loads and measures for mitigation.
- Training of site personnel in waste screening (see Section 3.1), flammables identification, etc.
- Training on fire response technique, notification procedures, fire response equipment, etc.

4.0 IMPLEMENTATION, ASSESSMENT, AND NOTIFICATION

The following subsections present a series of procedures for implementation, assessment, and notification of appropriate authorities in the unlikely event that a specific emergency develops (19.15.36.13.N.(1) NMAC).

4.1 Implementation

This Contingency Plan will be implemented when an imminent or actual emergency situation develops that represents a potential impact to freshwater, public health, safety or the environment. Situations that could require implementation of this Plan include:

TABLE II.5.5
Emergency Response Equipment List¹
DNCS Environmental Solutions

| Equipment Description | Quantity | Location | Use(s) |
|------------------------------------|-----------------|--|-------------------------------------|
| 10 lb ABC rated fire extinguisher | 2 | Gatehouse/Scalehouse ² | Firefighting |
| 10 lb ABC rated fire extinguisher | 2 | Trucks | Firefighting |
| 10 lb ABC rated fire extinguisher | 1 | Heavy Equipment | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Oil Process Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Oil Sales Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Produced Water Receiving Tanks | Firefighting |
| 20 lb ABC rated fire extinguisher | 1 | Diesel Storage Tank | Firefighting |
| Loader | 1 | Facility | Berm Repair |
| Oil Booms | 4 | NE Corner of Pond | Oil Containment |
| Self-contained Breathing Apparatus | 1 per employee | Gatehouse/Scalehouse ² | Protective gear for employees |
| Pair leather gloves | 1 per employee | Assigned to employee | Protective gear for employees |
| NOMEX Coveralls | 7 per Employee | Assigned to Employee | Protective gear for employees |
| Pair safety glasses | 1 per employee | All employee workstations | Protective gear for employees |
| Round-point wood handle shovels | 2 | Gatehouse/Scalehouse ² | Contain spillage, putting out fires |
| First Aid Kit | 1 | Gatehouse/Scalehouse ² | First Aid |
| First Aid Kit | 1 per vehicle | Facility Vehicles | First Aid |
| Eye Wash Station | 1 | Produced Water Receiving Tanks | First Aid |
| Portable 2-way radio | 1 per employee | Base unit at the Gatehouse/Scalehouse ² | Communications |
| Cell Phones | min. 3 | Facility Manager Facility Operator Facility Operator | Communications |
| Office Phone | 2 | Gatehouse/Scalehouse ² | Communications |
| Mobile pressure washer | 1 | Mobile | Decontaminating equipment |

Notes:

¹*Subject to change in response to waste receipts, regulatory requirements, technology, etc.*

²*The Gatehouse is associated with the Processing Area, and the Scalehouse is associated with the Landfill.*

- fire/explosions
- release of contaminants or oil field waste constituents

Table II.5.6 lists the implementation, assessment, and notification procedures that will be followed in the case of an emergency. Assessment and notification are discussed further in subsections 4.2 and 4.3.

TABLE II.5.6
Implementation, Assessment, and Notification Procedures for Releases
(Breaks, Leaks, Spills, Releases, Fires or Blowouts)
DNCS Environmental Solutions

1. **NOTIFY THE ECs:** The employee who first becomes aware of the emergency will immediately notify the Primary EC, and the Alternate EC and On-site EC if necessary. Notification will be made in person, via telephone, or via radio. The responding EC will assume full authority over the situation.
2. **ASSESS SOURCE, AMOUNT, AND EXTENT OF RELEASE:** The EC will assess the source, amount, and extent of spill or release, or released material resulting from a fire or explosion and determine possible hazards to fresh water, public health, safety or the environment.
3. **CONTROL MEASURES OR EVACUATION:** The EC's assessment of the emergency situation will be the basis for attempting to control the release or for implementing an evacuation, as well as for notifying the appropriate state and local authorities if their assistance is needed. **Table II.5.8** provides Evacuation Procedures and a Site Evacuation Plan is provided as **Figure II.5.3** (also refer to control measures in Section 5.0).
4. **CONTAIN AND PREVENT SPREAD OF RELEASE:** If deemed safe by the EC, the appropriate DNCS response equipment and personnel will be dispatched to the scene of the release. Personnel will initiate actions within their scope of training to contain the release and prevent the spread and/or windblown dispersion of the release. Depending on the type of release, appropriate equipment may include deployment of absorbents for spills, fire extinguishers, and/or earthmoving equipment.
5. **NOTIFICATION OF EMERGENCY AUTHORITIES:** If the EC's assessment indicates a need to notify appropriate state and local emergency authorities, notification will be initiated immediately. A list of state and local response agencies with phone numbers is provided as **Table II.5.2**. OCD will be notified as necessary in accordance with **Table II.5.7** (Release Notification and Corrective Action).
6. **DIVERT TRAFFIC AND RESTRICT PERSONS FROM AREA:** DNCS personnel not actively involved in release control operations will be restricted from the area until the area is determined to be safe by the EC and, if appropriate, the on-scene senior emergency authority (i.e., fire, police, hazard or other official). Vehicular traffic will be diverted away from release response activities until the situation is abated.

4.1.1 Fires/Explosions

Potential scenarios for fires include ignition of mobile equipment while operating or during servicing, or the ignition of oil-contaminated wastes. It is also possible that a chemically incompatible material may be transported to the Facility. Personnel are trained in the identification, prevention and control of fires or explosions.

4.1.2 Spills/Releases

The spill or release of a hazardous material at DNCS is most likely to involve fuel or various vehicle maintenance materials (i.e., engine oil, hydraulic oil, antifreeze, etc.). Spills involving these types of materials could potentially occur during fueling, routine maintenance operations or during unloading or processing of waste. In addition, the possibility exists for a spill of a hazardous material that may be inadvertently transported to the Facility. Although highly unlikely, spill/releases from pond and tanks on-site are addressed in Section 5.2.

4.2 Assessment

In the event of a spill, release, fire, or explosion the EC will immediately identify the character, source, amount and extent of released materials, if possible; as well as assessing the potential impact to fresh water, public health, safety or the environment (19.15.36.13.N.(10) NMAC). During an emergency, the EC may amend this Plan as necessary to protect fresh water, public health, safety or the environment (19.15.36.13.N.(14) NMAC). The EC will also assess the circumstances of an emergency situation and determine the responses required to:

- provide notifications to appropriate agencies
- implement appropriate recordkeeping procedures

This assessment provides the EC with critical data needed to determine whether an evacuation is necessary, whether emergency authorities are needed, and whether DNCS will attempt to control the release with on-site personnel and equipment. **Table II.5.7** provides OCD descriptions of “major” and “minor” releases which are applicable for assessment purposes (19.15.29.7 – 11 NMAC). This section prescribes additional detailed information regarding the Site Evacuation Plan, and Section 5.0 addresses control restrictions.

TABLE II.5.7
Part 29: Release Notification
DNCS Environmental Solutions

19.15.29.7 DEFINITIONS:

- A.** “Major release” means:
- (1)** an unauthorized release of a volume, excluding gases, in excess of 25 barrels;
 - (2)** an unauthorized release of a volume that:
 - (a)** results in a fire;
 - (b)** will reach a watercourse;
 - (c)** may with reasonable probability endanger public health; or
 - (d)** results in substantial damage to property or the environment;
 - (3)** an unauthorized release of gases in excess of 500 MCF; or
 - (4)** a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC.
- B.** “Minor release” means an unauthorized release of a volume, greater than five barrels but not more than 25 barrels; or greater than 50 MCF but less than 500 MCF of gases.

19.15.29.8 RELEASE NOTIFICATION:

- A.** The person operating or controlling either the release or the location of the release shall notify the division of unauthorized release occurring during the drilling, producing, storing, disposing, injecting, transporting, servicing or processing of oil, gases, produced water, condensate or oil field waste including regulated NORM, or other oil field related chemicals, contaminants or mixture of the chemicals or contaminants, in accordance with the requirements of 19.15.29 NMAC.
- B.** The person operating or controlling either the release or the location of the release shall notify the division in accordance with 19.15.29 NMAC with respect to a release from a facility of oil or other water contaminant, in such quantity as may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC.

19.15.29.9 REPORTING REQUIREMENTS: The person operating or controlling either the release or the location of the release shall provide notification of releases in 19.15.29.8 NMAC as follows.

- A.** The person shall report a major release by giving both immediate verbal notice and timely written notice pursuant to Subsections A and B of 19.15.29.10 NMAC.
- B.** The person shall report a minor release by giving timely written notice pursuant to Subsection B of 19.15.29.10 NMAC.

19.15.29.10 CONTENTS OF NOTIFICATION:

- A.** The person operating or controlling either the release or the location of the release shall provide immediate verbal notification within 24 hours of discovery to the division district office for the area within which the release takes place. In addition, the person shall provide immediate verbal notification of a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC to the division's environmental bureau chief. The notification shall provide the information required on form C-141.
- B.** The person operating or controlling either the release or the location of the release shall provide timely written notification within 15 days to the division district office for the area within which the release occurs by completing and filing form C-141. In addition, the person shall provide timely written notification of a release of a volume that may with reasonable probability be detrimental to water or exceed the standards in Subsections A and B or C of 19.15.30.9 NMAC to the division's environmental bureau chief within 15 days after the release is discovered. The written notification shall verify the prior verbal notification and provide appropriate additions or corrections to the information contained in the prior verbal notification.

19.15.29.11 CORRECTIVE ACTION: The responsible person shall complete division-approved corrective action for releases that endanger public health or the environment. The responsible person shall address releases in accordance with a remediation plan submitted to and approved by the division or with an abatement plan submitted in accordance with 19.15.30 NMAC.

4.2.1 Site Evacuation Plan

Based upon operational safeguards and the type of waste materials proposed for receipt at DNCS, the potential for a Facility evacuation is unlikely (19.15.36.13.N.(5) NMAC). In an emergency situation, the EC is the individual responsible for determining when evacuation of the DNCS Facility is required. Imminent or actual dangers that constitute a situation that could require evacuation include:


- A generalized fire or threat of fire that cannot be avoided.
- An explosion or the threat of explosion that cannot be averted.
- A major spill or leak that cannot be contained and constitutes a potential threat to human health or the environment.


When conditions warrant immediate evacuation of on-site persons (e.g., Facility personnel, transporters, visitors, vendors, etc.) everyone will be directed to proceed immediately to the Landfill Scalehouse or the Processing Area Gatehouse (as applicable), DNCS's primary evacuation route. DNCS Personnel will exercise good judgment and common sense in using the primary evacuation route to exit the Facility, or selecting the most appropriate alternative evacuation route, if necessary. Assembly points, primary and secondary evacuation routes are provided on **Figure II.5.3**. Driving directions to the nearest hospital are included as **Figure II.5.4**, and **Table II.5.8** provides detailed procedures for evacuating the Facility.

TABLE II.5.8
Evacuation Procedures
DNCS Environmental Solutions

When evacuation is required, the following procedures will be followed:

1. Facility personnel will be alerted directly or using the Facility telephone, cellular telephones, or radios.
2. Vehicles delivering waste will be diverted away from the location of the emergency and routed towards the Facility exit (**Figure II.3.2**).
3. Facility operating equipment will be shut down.
4. Personnel will be directed to proceed to the Processing Area Gatehouse or the Landfill Scalehouse (as applicable), which will be the primary meeting locations (**Figure II.3.4**). The EC will identify missing persons at that time.
5. If the emergency involves the Gatehouse or Scalehouse or its immediate environs, the Facility secondary assembly point and evacuation routes will be utilized (as applicable).
6. Once assembled, personnel will stand by to afford assistance, if and as needed, or to evacuate the Site.

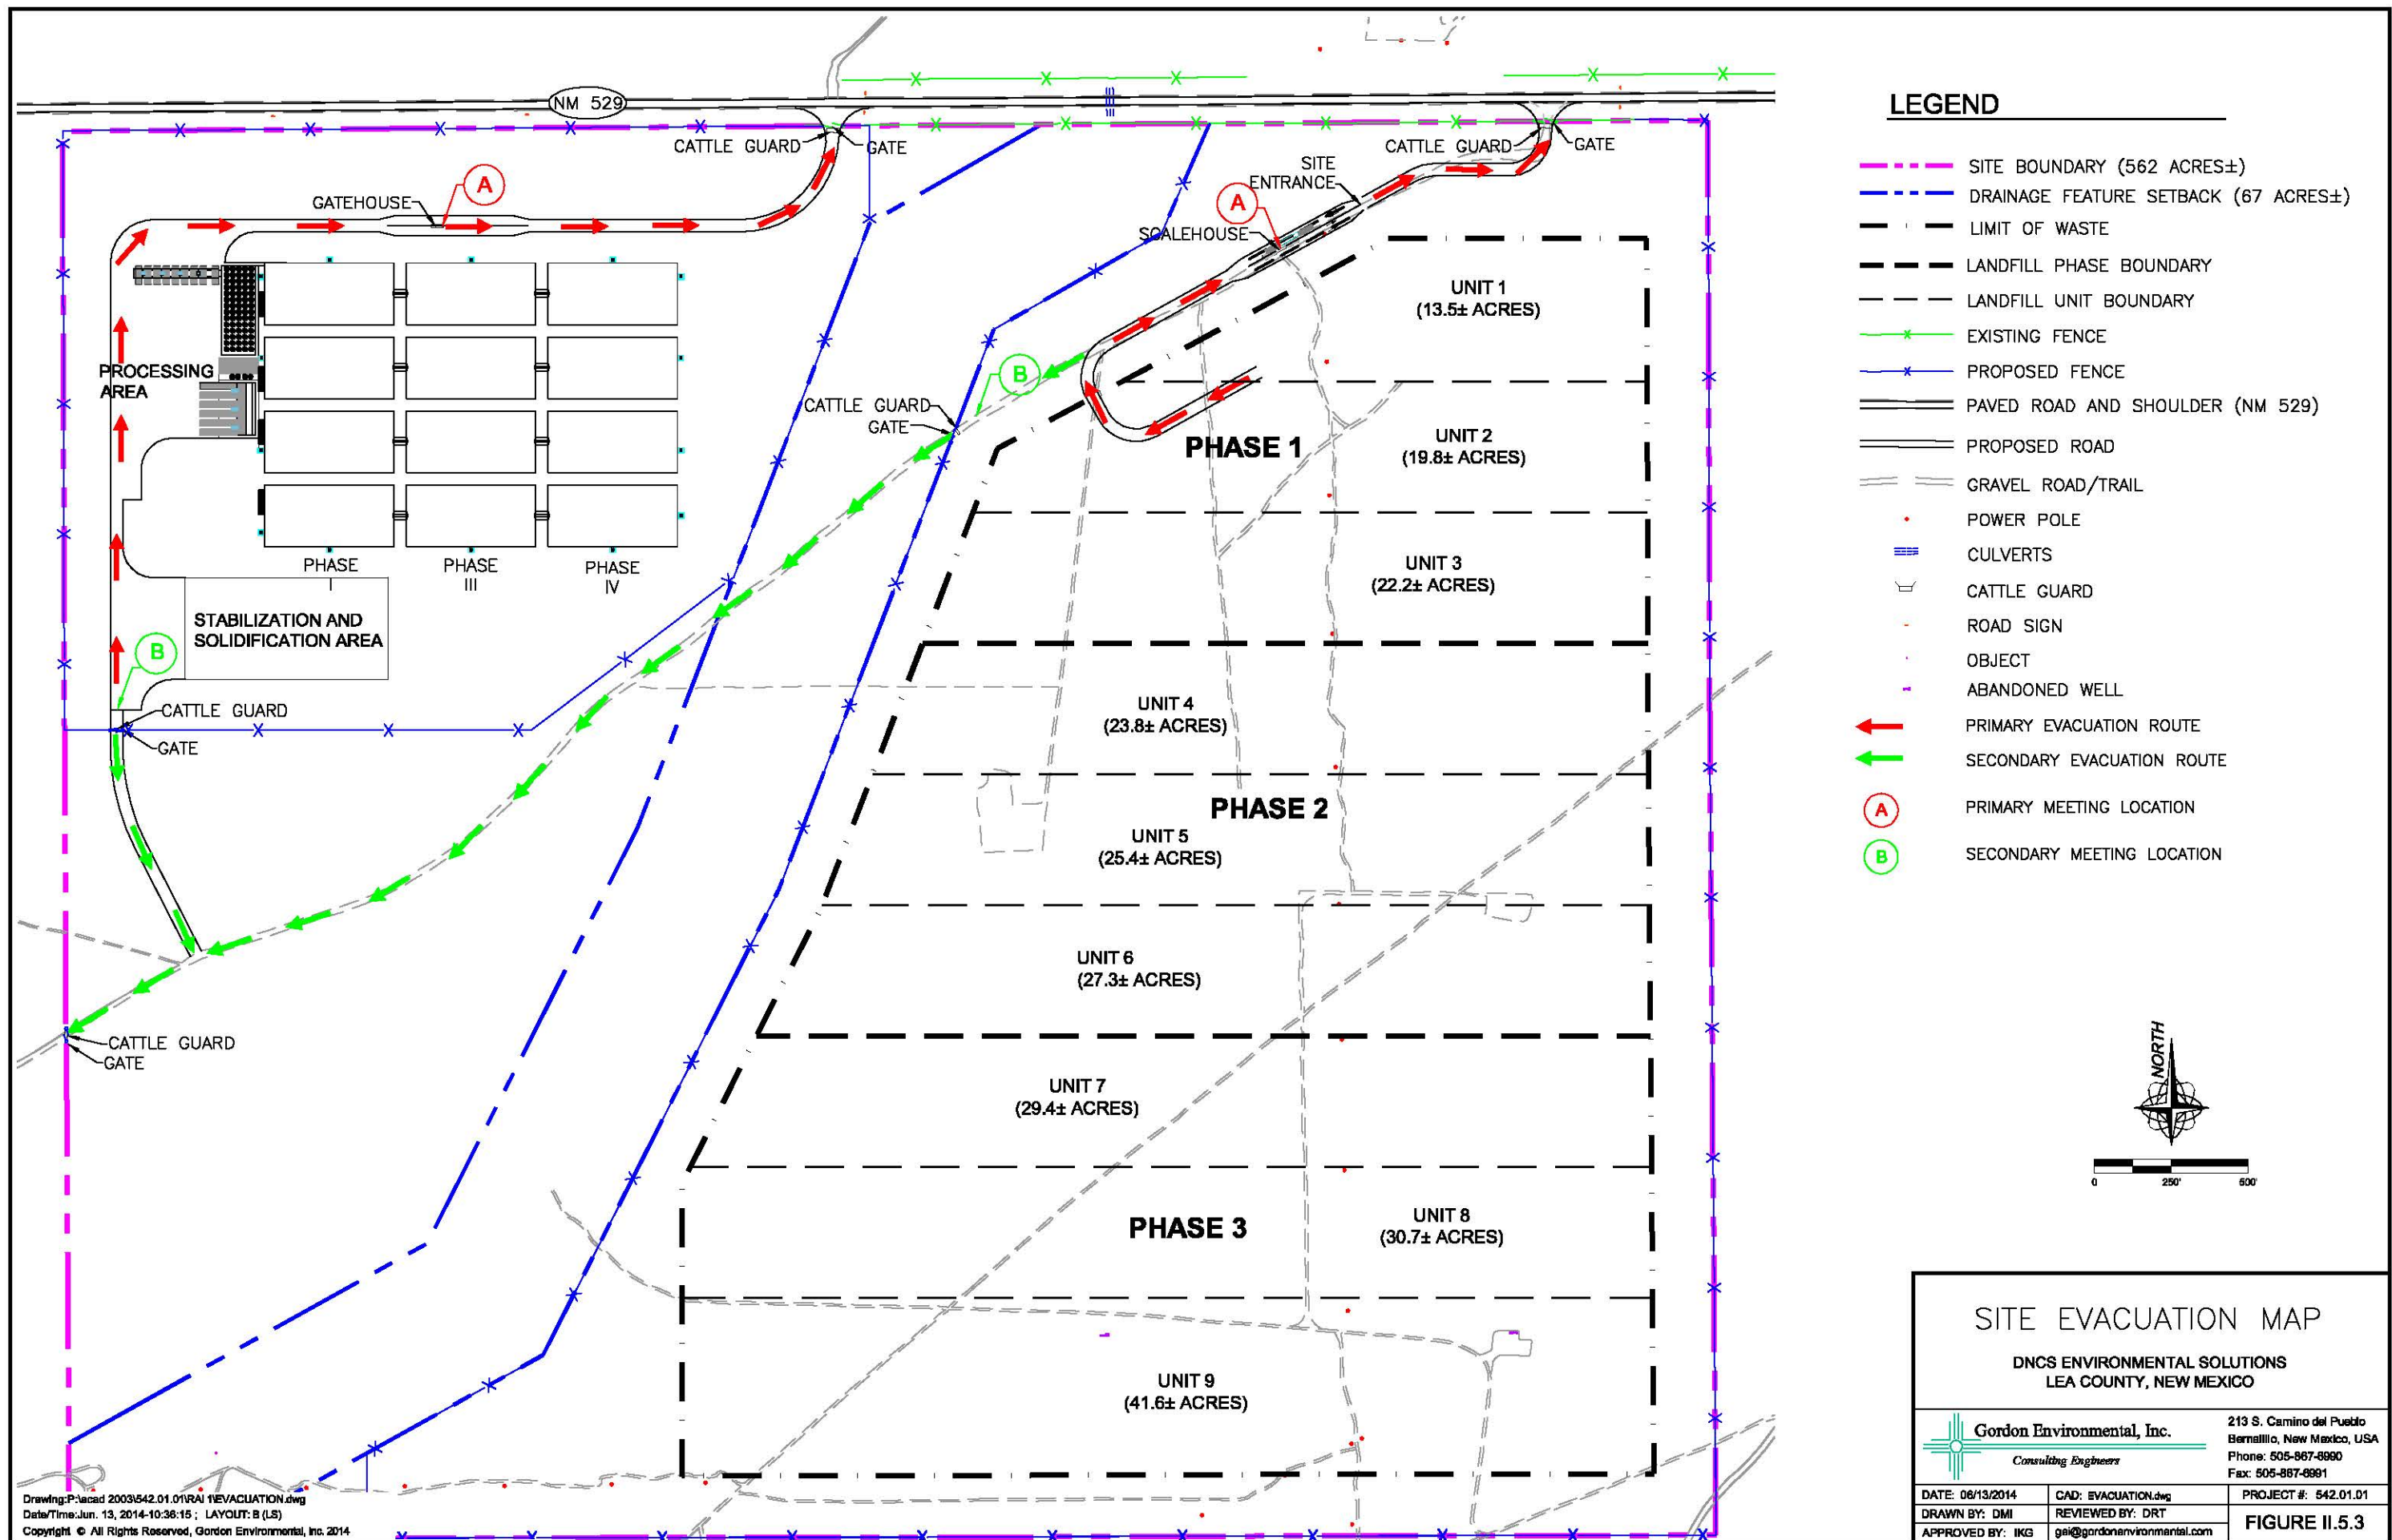

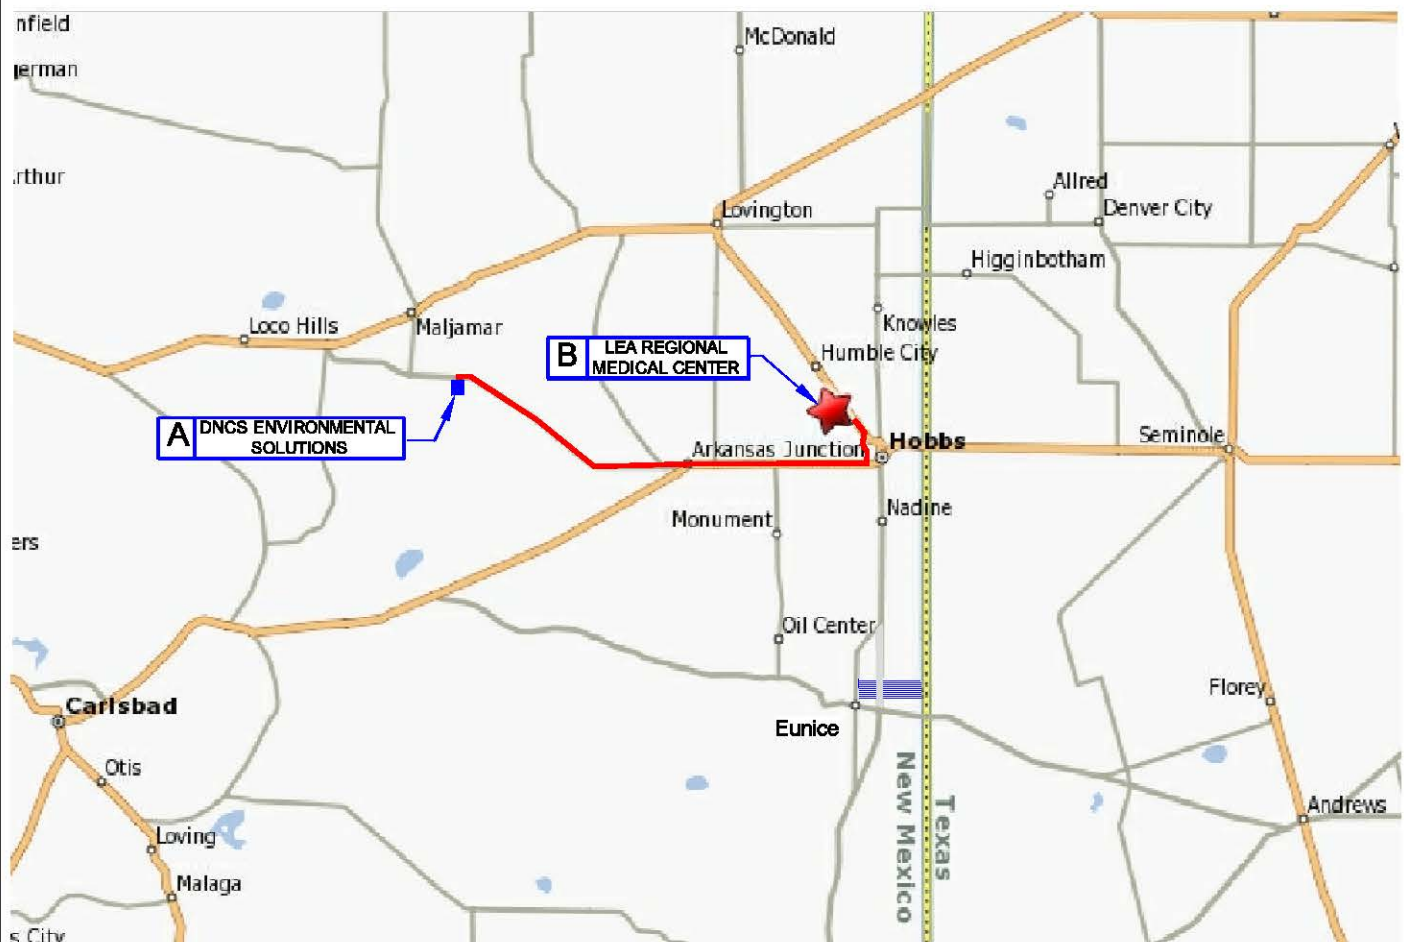

A: DNCS ENVIRONMENTAL SOLUTIONS. NM 529

- | | |
|---|---------|
| 1. Head EAST on NM-529 toward DOG LAKE RD. | 20.2 mi |
| 2. Turn LEFT onto US-180 E / US-62/HOBBS Hwy. | 11.9 mi |
| 3. Turn LEFT onto Co Rd 66A / NW COUNTY ROAD. | 3.5 mi |
| 4. Turn LEFT onto NM-18 N / N LOVINGTON HWY. | 1.8 mi |
| 5. Arrive 5419 N LOVINGTON HWY | 0.0 mi |

B: Lea Regional Medical Center, 5419 N Lovington Hwy, Hobbs, NM 88240-9100

Note: A to B Travel Estimates: 42 minutes / 37.4 miles



NOT TO SCALE

HOSPITAL LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
 LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
 Consulting Engineers

213 S. Camino del Pueblo
 Bernalillo, New Mexico, USA
 Phone: 505-867-8990
 Fax: 505-867-6991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 09/18/13 | CAD: HOSPITAL LOCATION.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.5.4 |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

4.3 Notification of Authorities

The following discussion presents a series of procedures for implementation and notification of appropriate authorities in the event that a specific emergency develops (19.15.36.13.N.(1) NMAC). Whenever there is an imminent or actual emergency, the EC will immediately notify on-site persons (Facility personnel, visitors, vendors, transporters, etc.) via on-site communication systems, as well as notify the appropriate state and local agencies as necessary (19.15.36.13.N.(9) NMAC).

Table II.5.1 provides a list of emergency response agencies and contacts that may need to be notified depending on the type and extent of an emergency situation. **Table II.5.1** will be posted as appropriate and near on-site telephones for easy access by DNCS personnel. Fire, police, and medical authorities should be contacted as necessary in an emergency situation (**Table II.5.1**). The adjacent property users should be notified if there is an immediate threat to human health and the environment in the area, such as fire, explosions or H₂S release (land currently vacant).

In the case of an H₂S emergency where H₂S ≥ 10 ppm site personnel will follow the H₂S plan in **Volume II.3**. However, notification will be provided to the New Mexico State Police, Lea County Sheriff, and OCD (also listed on **Table II.5.1**):

- OCD
Hobbs, NM (575) 393-6161
Mobile Phone (575) 370-3180
Santa Fe, NM (505) 476-3440
- New Mexico State Police 911 or (575) 392-5580
- Lea County Sheriff's Dept. 911 or (575) 396-3611
- Lea County Emergency Management (575) 391-2983

DNCS will also notify Phoenix Environmental if necessary (**Table II.5.2**) to provide response personnel, equipment, and supplies to mitigate the source of an H₂S reading of ≥ 10 ppm at the property boundary.

Table II.5.7 provides specific information regarding notification of OCD in the case of a release, which by definition includes breaks, leaks, spills, releases, fires or blowouts (**Table II.5.3**). In addition, **Table II.5.7** also provides OCD definitions for “major” and “minor” releases.

Additional State, Federal, and other local emergency contact numbers are provided and should be used as deemed appropriate to the situation. If the EC determines that the incident could threaten fresh water, human health, public safety or the environment beyond the limits of the DNCS Facility, the EC will notify the National Response Center and New Mexico Environment Department (NMED) spill emergencies at the following phone numbers (also included on **Table II.5.1**):

- National Response Center - 24 Hr. Hotline: (800) 424-8802
- NMED Environmental Emergencies - 24 Hr. Hotline: (505) 827-9329

The EC's notification to authorities must include the following information, as listed on the Emergency Response Record Keeping Form:

- name and telephone number of person reporting the incident
- name and address of Facility
- time and type of incident (e.g., hazardous material release, fire)
- name and quantity of material(s) involved, to the extent known
- extent of injuries, if any
- possible hazards to human health or the environment

5.0 CONTROL PROCEDURES

This section provides information for the EC and DNCS personnel regarding control procedures for different types of releases including fires, explosions, spills, and releases. The focus of the EC's initial efforts will be the protection of Facility personnel and those using the Facility. Control procedures should only be implemented by the EC and DNCS personnel once an assessment of the situation and possible hazards to fresh water, public health, safety or the environment has been completed. Persons should not attempt to contain or control fires, explosions, spills, leaks, breaks, or blowouts that are beyond the scope of their safety, training, and available response equipment. Once the appropriate state and local agencies arrive on scene, these authorities will take control of the situation, as appropriate.

The following subsections provide the EC and DNCS personnel with specific control procedures for emergency situations. Note that in the case of an H₂S emergency situation, the procedures outlined in **Volume II.3** (Hydrogen Sulfide (H₂S) Prevention and Contingency Plan) should be followed.

5.1 Fire Control Guidelines

Fire response equipment available at DNCS is identified on **Table II.5.5**. Fire control efforts will not be initiated until untrained personnel or customers are at a safe distance. The following general guidelines for fire control will be followed in the event of a fire or explosion at DNCS:

TABLE II.5.9
Fire/Explosion: Control Guidelines
DNCS Environmental Solutions

1. **INITIATE FIRE CONTROL:** The EC and DNCS personnel will initiate response actions within the scope of their training to control the spread of the fire.
2. **P.A.S.S. METHOD:** Fires will generally be controlled with ABC-type fire extinguishers using the P.A.S.S. method (Pull pin, Aim nozzle, Squeeze trigger, Sweep from side to side to extinguish).
3. **SMOTHER METHOD:** Fires may also be smothered with cover materials (i.e., soil, caliche) when possible to extinguish.
4. **AVAILABLE WATER SOURCES:** Fires may be doused or hosed with available equipment, water truck, etc.
5. **EVACUATE AND NOTIFY EMERGENCY AUTHORITIES:** If at any time the scope of the fire is beyond the capabilities of DNCS personnel to contain and/or extinguish it, the EC will contact the local Fire Department or the Lea County Emergency Management (**Table II.5.2**) for assistance. Personnel and visitors will be instructed to evacuate the area.
6. **MONITOR SITUATION:** The EC will monitor for leaks, pressure buildup, gas generation or rupture in valves, pipes or equipment as appropriate (19.15.36.13.N.(11) NMAC).
7. **RECORDKEEPING/REPORTING:** The EC will complete an Incident Report Form (**Attachment II.5.B**) and maintain a copy in the Facility Operating Record, readily accessible for OCD inspection.

After responding to the incident, the EC will meet with involved personnel and response agencies, if appropriate, to assess the cause of the emergency and document the incident. The Incident Report Form (**Attachment II.5.B**) will reflect the details of emergency and the resulting actions. The identified causative agent will be removed from the vicinity of the

Facility if the possibility of re-ignition exists. Appropriate actions to prevent recurrence of fire will be developed and implemented. Personnel involved with the handling, transport, and placement of materials at the Facility will be informed of the resultant actions. Significant changes in operating protocol or procedures resulting from this meeting will be documented and added as an amendment to the Plan (see Section 10.0).

5.2 Spills/Release Control Guidelines

The waste inspection and screening program (see Section 3.0) has been implemented in order to intercept potential unauthorized wastes inadvertently delivered to DNCS before they are unloaded at the Facility. Emergency equipment for response to such releases includes, but is not limited to, the items provided in the Emergency Response Equipment List (**Table II.5.5**). Containment/control and characterization of potential releases will be conducted only after untrained personnel are at a safe distance. At that point, the EC will then implement the following procedures for managing existing or potential release (19.15.36.13.N.(6) NMAC):

Immediately after an emergency situation, the EC will make arrangements for the segregation, storage, or disposal of recovered wastes, water, or contaminated materials resulting from the incident. An evaluation of the contamination will be carried out as soon as time permits to prevent future accidents. The Incident Report Form (**Attachment II.5.B**) will reflect the details of emergency and the resulting actions.

Although operating procedures, roadways, unloading areas, and general areas surrounding the DNCS Facility will be maintained in an effort to minimize the potential for a release or spill of hazardous materials, provisions have been developed to improve procedures if an event warrants review and modification. After responding to the incident, the EC will meet with involved personnel to determine the cause of the spill. Appropriate actions to prevent its recurrence will be developed and implemented. Personnel involved with the handling and transport of hazardous materials will be informed of the procedures/protocol that is developed in response to knowledge gained from past response procedures. Significant changes in operating protocol or procedures resulting from this meeting will be documented and added as an amendment to this Plan. Plan amendments will be documented and disseminated as outlined in Section 10.0, including OCD.

TABLE II.5.10
Spill/Release: Control Guidelines
DNCS Environmental Solutions

1. **INITIATE CONTROL:** The EC and DNCS personnel will initiate response actions within the scope of their training to control the spill/release.
2. **REMOVAL OR SEGREGATION:** Determine if the material can be safely removed to a designated waste inspection/segregation area for further evaluation. If the materials cannot be safely relocated, contain them for investigation and sampling using the spill control list. If necessary, shut down operations until safe conditions are restored.
3. **CONTAIN RELEASE:** Attempt to contain the release to the smallest area possible. Examples of equipment available for spill containment are non-reactive sorbent materials, oil booms, sand, shovels and heavy equipment. A third-party contractor is also available for emergency response to augment efforts by on-site personnel.
4. **SAMPLING:** After isolating the contaminants and contaminated media, inspect them to determine if sampling is appropriate. If appropriate, isolate contaminants in the waste inspection or segregation area, or in designated leak-proof containers, until characterization is complete.
5. **CLEANUP:** After the release has been contained and necessary samples have been obtained, cleanup will be initiated by removing the spilled materials, sorbent materials, soils used for containment, etc.
6. **EQUIPMENT MONITORING:** Pertinent liners and equipment, including valves and pipes, will be monitored for leaks, pressure buildup, gas generation or rupture as appropriate (19.15.36.13.N.(11) NMAC).
7. **VERIFICATION SAMPLING:** Dependent on the type of material spilled, the EC will assess requirements for cleanup verification including the collection of samples for appropriate analytical testing.
8. **DISPOSAL OR PROCESSING:** When visual and/or laboratory characterization is complete, determine appropriate processing or disposal procedures for that waste type. Send residuals for disposal to a Facility that is approved for managing that type of waste.
9. **EVACUATE AND NOTIFY EMERGENCY AUTHORITIES:** If at any time the scope of the spill/release is beyond the capabilities of the on-site personnel to contain and/or extinguish it, the EC will contact the local Fire Department or Lea County Emergency Management (**Table II.5.1**) for assistance. Personnel and visitors will be instructed to evacuate the area.
10. **RECORDKEEPING/REPORTING:** The EC will complete an Incident Report Form (**Attachment II.5.B**) and maintain a copy in the Facility Operating Record, readily accessible for OCD inspection.

5.3 Clean, Replace, and Inspect Equipment

Following an emergency incident, emergency response equipment used will be inspected, decontaminated/cleaned and made fit for re-use, or replaced as necessary, so that the equipment will be available when Facility operations resume. The inspection of equipment will take place before operations resume ensuring that each item is in proper working condition. This inspection will include a review of the Facility infrastructure to ensure that a potential hazard has not been created as a result of responding to the emergency. Prescribed procedures may include lock-out/tag-out on processing equipment until inspection and repairs can be completed. Remedial activities, as a result of this inspection, may include recharging of fire extinguishers, replacement of personal protective gear, restocking of disposable items, etc. The EC will verify that response equipment has been properly decontaminated and returned to its original location and is fit for future use.

6.0 STORAGE AND TREATMENT OF RELEASED MATERIALS

Spilled or otherwise contaminated material approved for disposal at the DNCS Landfill will be managed in accordance with standard operating practices. Other hazardous spilled materials will be containerized, stored and disposed of in accordance with applicable local, state and federal regulatory requirements; potentially including third-party services (i.e., Phoenix Environmental, Hobbs, NM). No oil field waste, which may be incompatible with the released material, will be treated, stored, or disposed of until cleanup procedures are complete (19.15.36.13.N.(12), (13) NMAC).

7.0 EMERGENCY EQUIPMENT

The following sections describe emergency equipment that is available at DNCS for responding to emergency situations. An Emergency Response Equipment List describing the equipment, quantity, location, and uses is provided as **Table II.5.5**.

7.1 Internal Communications

Communications at the DNCS Facility will be accomplished via cellular telephones, land lines, and two-way radios. These systems provide Facility personnel with immediate and redundant emergency notification capabilities, and the opportunity to receive instructions in the event of an emergency incident. Mechanical difficulties with the communications equipment will be promptly repaired. Internal communication devices are also listed on **Table II.5.5**.

7.2 External Communications

The telephones located at DNCS will have outside access in the event that notification of the local emergency response authorities is required (i.e., EMS, fire department, ambulance, etc.). In addition, key Facility personnel including the ECs, General Manager, etc., will carry cellular telephones for contacting each other and outside agencies. The cellular telephones will also provide a backup means for contacting emergency authorities in the event they cannot be reached by conventional telephone lines. Emergency phone numbers will be posted in the Landfill Scalehouse and the Processing Area Gatehouse and provided to employees. External communication devices are also included on **Table II.5.5**.

7.3 Fire Prevention

Portable ABC-type fire extinguishers will be located in Facility vehicles and mobile equipment, as well as within the Landfill Scalehouse and the Processing Area Gatehouse, and tanks areas. Fire extinguishers will be maintained in accordance with state and local fire codes and regulations and routinely serviced. On-site earthmoving equipment will be available to move and apply cover material for control of smoldering loads. Cover material will be readily available throughout the site.

7.4 Personnel Protection, First Aid, and Safety Equipment

Personal protective equipment (PPE) necessary for preliminary response to a release of hazardous materials will be maintained in on-site buildings (Landfill Scalehouse/Processing Area Gatehouse, etc.) and/or issued to each employee (**Table II.5.5**). These items may include Tyvek suits, gloves, safety glasses, hearing protection, etc.

First aid and safety equipment will be maintained at various locations at the DNCS Facility (**Table II.5.4**). Safety equipment located at the Facility will include industrial first aid kits, emergency shower/eye wash station, etc. First aid kits will be placed in the Landfill Scalehouse/Processing Area Gatehouse and the Produced Water Facility. An emergency shower and eye wash station will be located at the Produced Water Facility. In addition, first aid kits will be maintained in Facility vehicles, including heavy equipment. Prominent signs will be placed identifying the location of health and safety equipment, and emergency response items (e.g., fire extinguishers).

7.5 Spill Response Equipment

Spill response equipment, including heavy equipment and hand-gear, will be stored at specific locations around the Facility (**Table II.5.5**).

8.0 RECORDKEEPING

The EC will be responsible for ensuring that emergency response actions are fully documented. The Incident Report Form (**Attachment II.5.B**) illustrates the information that will be recorded as a result of emergency incident and related response action. This form will be signed by both the EC and the Facility Manager. Copies of the form filed for each incident will be retained as part of the DNCS Facility Operating Record.

In addition, in the case of an unauthorized release at the DNCS Facility, the OCD will be notified pursuant to 19.15.29 NMAC. As defined by OCD in **Table II.5.2**, a “release” is *“breaks, leaks, spills, releases, fires or blowouts involving crude oil, produced water, condensate, drilling fluids, completion fluids or other chemical or contaminant or mixture thereof, including oil field wastes and natural gases to the environment”* (19.15.2.7.R.(4) NMAC). A major release (19.15.29 NMAC; **Table II.5.6**) includes *an unauthorized release of a volume in excess of 25 barrels; or of any volume which results in a fire, will reach a water course, may with reasonable probability endanger public health or results in substantial damage to property or to the environment, cause detriment to water or exceed the standards in 19.15.30 NMAC*. A major release requires both immediate verbal notification (within 24 hours) as well as timely written notification to OCD (within 15 days) using OCD Form C-141

(**Attachment II.5.C**) relating to *Release Notification and Corrective Action*. A minor release (**Table II.5.6**) is an unauthorized release of greater than 5 barrels but less than 25 barrels. A minor release requires timely written notice only. A copy of OCD Form C-141 is provided as **Attachment II.5.C**. Copies of the form filed for each incident will be retained as part of the DNCS Facility Operating Record.

9.0 COORDINATION AGREEMENTS

A copy of the Contingency Plan will be made available to the organizations identified in **Table II.5.2**. The Contingency Plan serves to familiarize each of the identified organizations with the operations of the Facility and types of emergencies and responses that may be required. Each agency will be encouraged to visit the Facility for purposes of assessing site operations and providing input regarding emergency response procedures (19.15.36.13.N.(2) and (7) NMAC).

10.0 PLAN AMENDMENT

The EC will be responsible for assuring updates to or amendments of the Contingency Plan. Amendments to the Contingency Plan will be made within five working days in the event of the following (19.15.36.13.N.(8) NMAC):

1. The Facility Permit is revised or modified.
2. The Plan fails in an emergency.
3. Modification to the Facility design, construction, operation, maintenance or other circumstances that changes the potential for fires, explosion, or releases of hazardous oil field waste constituents; or related changes in the appropriate emergency response.
4. The list of ECs changes.
5. The list of emergency equipment changes significantly.

The Contingency Plan amendments will be distributed to OCD and made available to each of the organizations identified in **Table II.5.1** with a cover letter highlighting substantive changes. Proposed changes will be in compliance with 19.15.36.13.N NMAC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

**ATTACHMENT II.5.A
REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE
OCD FORM C-138**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-138
Revised August 1, 2011

*Surface Waste Management Facility Operator
and Generator shall maintain and make this
documentation available for Division inspection.

REQUEST FOR APPROVAL TO ACCEPT SOLID WASTE

1. Generator Name and Address:

2. Originating Site:

3. Location of Material (Street Address, City, State or ULSTR):

4. Source and Description of Waste:

Estimated Volume yd³ / bbls Known Volume (to be entered by the operator at the end of the haul) yd³ / bbls

5. GENERATOR CERTIFICATION STATEMENT OF WASTE STATUS

I, , representative or authorized agent for do hereby
certify that according to the Resource Conservation and Recovery Act (RCRA) and the US Environmental Protection Agency's July 1988
regulatory determination, the above described waste is: (Check the appropriate classification)

☐ RCRA Exempt: Oil field wastes generated from oil and gas exploration and production operations and are not mixed with non-
exempt waste. *Operator Use Only: Waste Acceptance Frequency* ☐ Monthly ☐ Weekly ☐ Per Load

☐ RCRA Non-Exempt: Oil field waste which is non-hazardous that does not exceed the minimum standards for waste hazardous by
characteristics established in RCRA regulations, 40 CFR 261.21-261.24, or listed hazardous waste as defined in 40 CFR, part 261,
subpart D, as amended. The following documentation is attached to demonstrate the above-described waste is non-hazardous. (Check
the appropriate items)

☐ MSDS Information ☐ RCRA Hazardous Waste Analysis ☐ Process Knowledge ☐ Other (Provide description in Box 4)

GENERATOR 19.15.36.15 WASTE TESTING CERTIFICATION STATEMENT FOR LANDFARMS

I, , representative for do hereby certify that
representative samples of the oil field waste have been subjected to the paint filter test and tested for chloride content and that the samples
have been found to conform to the specific requirements applicable to landfarms pursuant to Section 15 of 19.15.36 NMAC. The results
of the representative samples are attached to demonstrate the above-described waste conform to the requirements of Section 15 of
19.15.36 NMAC.

5. Transporter:

OCD Permitted Surface Waste Management Facility

Name and Facility Permit #:

Address of Facility:

Method of Treatment and/or Disposal:

☐ Evaporation ☐ Injection ☐ Treating Plant ☐ Landfarm ☐ Landfill ☐ Other

Waste Acceptance Status:

☐ APPROVED

☐ DENIED (Must Be Maintained As Permanent Record)

PRINT NAME:

TITLE:

DATE:

SIGNATURE:

TELEPHONE NO.:

Surface Waste Management Facility Authorized Agent

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

**ATTACHMENT II.5.B
INCIDENT REPORT FORM (TYPICAL)**

INCIDENT REPORT FORM

DNCS Environmental Solutions

Lea County, NM

Type of Incident and General Information

- | | |
|--|--|
| <input type="checkbox"/> Work Related Injury/Illness | <input type="checkbox"/> Unsafe Act/Near Miss |
| <input type="checkbox"/> Property Damage | <input type="checkbox"/> Vandalism/Criminal Activity |
| <input type="checkbox"/> Vehicular Accident | <input type="checkbox"/> Other _____ (i.e., spill, release, fire, explosion, hot load, etc.) |

Employee Name: _____ Job Title: _____

Phone No: _____ Date of Incident: _____ Time of Incident: _____ AM/PM

Location of Incident: _____

Start of Shift: _____ Weather: _____

Date and Time Reported to Management: Date: _____ Time: _____ AM/PM

Reported to: _____ Title: _____ Reported by: _____

What was the injury category of incident at the time it was first reported to management?

- ☐ N/A. Employee does not claim an injury associated with this incident
☐ Notice Only of Injury, Declined Medical Treatment at this time
☐ First Aid done on site, Declined Medical Treatment at this time
☐ Medical Treatment. Transported by _____ to _____
☐ Fatality, employee

Employee's Description of Incident / Declaración del empleado de los hechos

Were you injured? (*Ud. se lastimó ?*) Yes ☐ No ☐

Type of Injury: (*Tipo de lesión*) _____

Part of Body: _____ Left _____ Right _____
(*Parte del cuerpo*) (*Izq*) (*Der*)

Explain in your own words what happened. (*Explique en sus propias palabras lo que sucedió*)

Employee Signature: (*Firma del empleado*) _____

Date: (*Fecha*) _____

THIS SECTION FILLED OUT BY
EMPLOYEE

INCIDENT REPORT FORM

DNCS Environmental Solutions

TO BE FILLED OUT BY EMERGENCY COORDINATOR

Describe in order of occurrence the events leading to the incident and/or injury. Reconstruct the sequence of events that led to the incident. _____

Identify possible hazards to human health or the environment: _____

Identify name and quantity of material(s) involved: _____

CORRECTIVE ACTIONS. (Equipment, Practices, Environment, Retraining) Steps that have been, or will be taken to prevent recurrence: _____

Date Corrective Action Completed: _____

- I have been briefed on the corrective actions outlined above
- *Estoy consciente de las acciones correctivas mencionadas anteriormente en esta hoja*

Employee's Signature

Date

Report Reviewed and Concluded By:

Emergency Coordinator's Signature

Date

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 5: CONTINGENCY PLAN**

**ATTACHMENT II.5.C
RELEASE NOTIFICATION AND CORRECTIVE ACTION
OCD FORM C-141**

District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 S. First St., Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-141
Revised August 8, 2011

Submit 1 Copy to appropriate District Office in
accordance with 19.15.29 NMAC.

Release Notification and Corrective Action

OPERATOR

☐ Initial Report ☐ Final Report

| | | |
|-----------------|---------------|---------|
| Name of Company | Contact | |
| Address | Telephone No. | |
| Facility Name | Facility Type | |
| Surface Owner | Mineral Owner | API No. |

LOCATION OF RELEASE

| | | | | | | | | |
|-------------|---------|----------|-------|---------------|------------------|---------------|----------------|--------|
| Unit Letter | Section | Township | Range | Feet from the | North/South Line | Feet from the | East/West Line | County |
|-------------|---------|----------|-------|---------------|------------------|---------------|----------------|--------|

Latitude _____ Longitude _____

NATURE OF RELEASE

| | | |
|---|---|----------------------------|
| Type of Release | Volume of Release | Volume Recovered |
| Source of Release | Date and Hour of Occurrence | Date and Hour of Discovery |
| Was Immediate Notice Given? <input type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> Not Required | If YES, To Whom? | |
| By Whom? | Date and Hour | |
| Was a Watercourse Reached? <input type="checkbox"/> Yes <input type="checkbox"/> No | If YES, Volume Impacting the Watercourse. | |

If a Watercourse was Impacted, Describe Fully.*

Describe Cause of Problem and Remedial Action Taken.*

Describe Area Affected and Cleanup Action Taken.*

I hereby certify that the information given above is true and complete to the best of my knowledge and understand that pursuant to NMOCD rules and regulations all operators are required to report and/or file certain release notifications and perform corrective actions for releases which may endanger public health or the environment. The acceptance of a C-141 report by the NMOCD marked as "Final Report" does not relieve the operator of liability should their operations have failed to adequately investigate and remediate contamination that pose a threat to ground water, surface water, human health or the environment. In addition, NMOCD acceptance of a C-141 report does not relieve the operator of responsibility for compliance with any other federal, state, or local laws and/or regulations.

| | | | | | |
|-----------------|--|---------------------------------------|--|-----------------------------------|--|
| Signature: | | <u>OIL CONSERVATION DIVISION</u> | | | |
| | | Approved by Environmental Specialist: | | | |
| Printed Name: | | Approval Date: | | Expiration Date: | |
| Title: | | Conditions of Approval: | | Attached <input type="checkbox"/> | |
| E-mail Address: | | | | | |
| Date: | | Phone: | | | |

* Attach Additional Sheets If Necessary

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 6: MIGRATORY BIRD PROTECTON PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|---|-------------|
| 1.0 | INTRODUCTION | II.6-1 |
| 1.1 | Site Location | II.6-1 |
| 1.2 | Description | II.6-1 |
| 1.3 | Purpose..... | II.6-3 |
| 2.0 | MIGRATORY BIRD PREVENTION..... | II.6-3 |
| 2.1 | Siting Perspective..... | II.6-3 |
| 2.2 | Human and Mechanical Intervention..... | II.6-3 |
| 3.0 | MIGRATORY BIRD LANDING CONTINGENCY..... | II.6-4 |
| 3.1 | Migratory Bird Rescue..... | II.6-4 |
| 3.2 | Screening and Netting..... | II.6-5 |

LIST OF FIGURES

| Figure No. | Title | Page |
|-------------------|-------------------------|-------------|
| II.6.1 | SITE LOCATION MAP | II.6-2 |

LIST OF Tables

| Table No. | Title | Page |
|------------------|---------------------------|-------------|
| II.6.1 | BIRD RESCUE PROTOCOL..... | II.6-5 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 6: MIGRATORY BIRD PROTECTION PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC. DNCS will coordinate with USEPA Region 6 regarding this Plan if so directed by OCD.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.6.1**). Site access will be provided via the south side of NM 529.

1.2 Description

The DNCS Facility is a proposed new Surface Waste Management Facility that will include two main components; a liquid oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm). Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Development Plan provided in the **Permit Plans, Sheet 3** identifies the locations of the Processing Area and Landfill facilities.

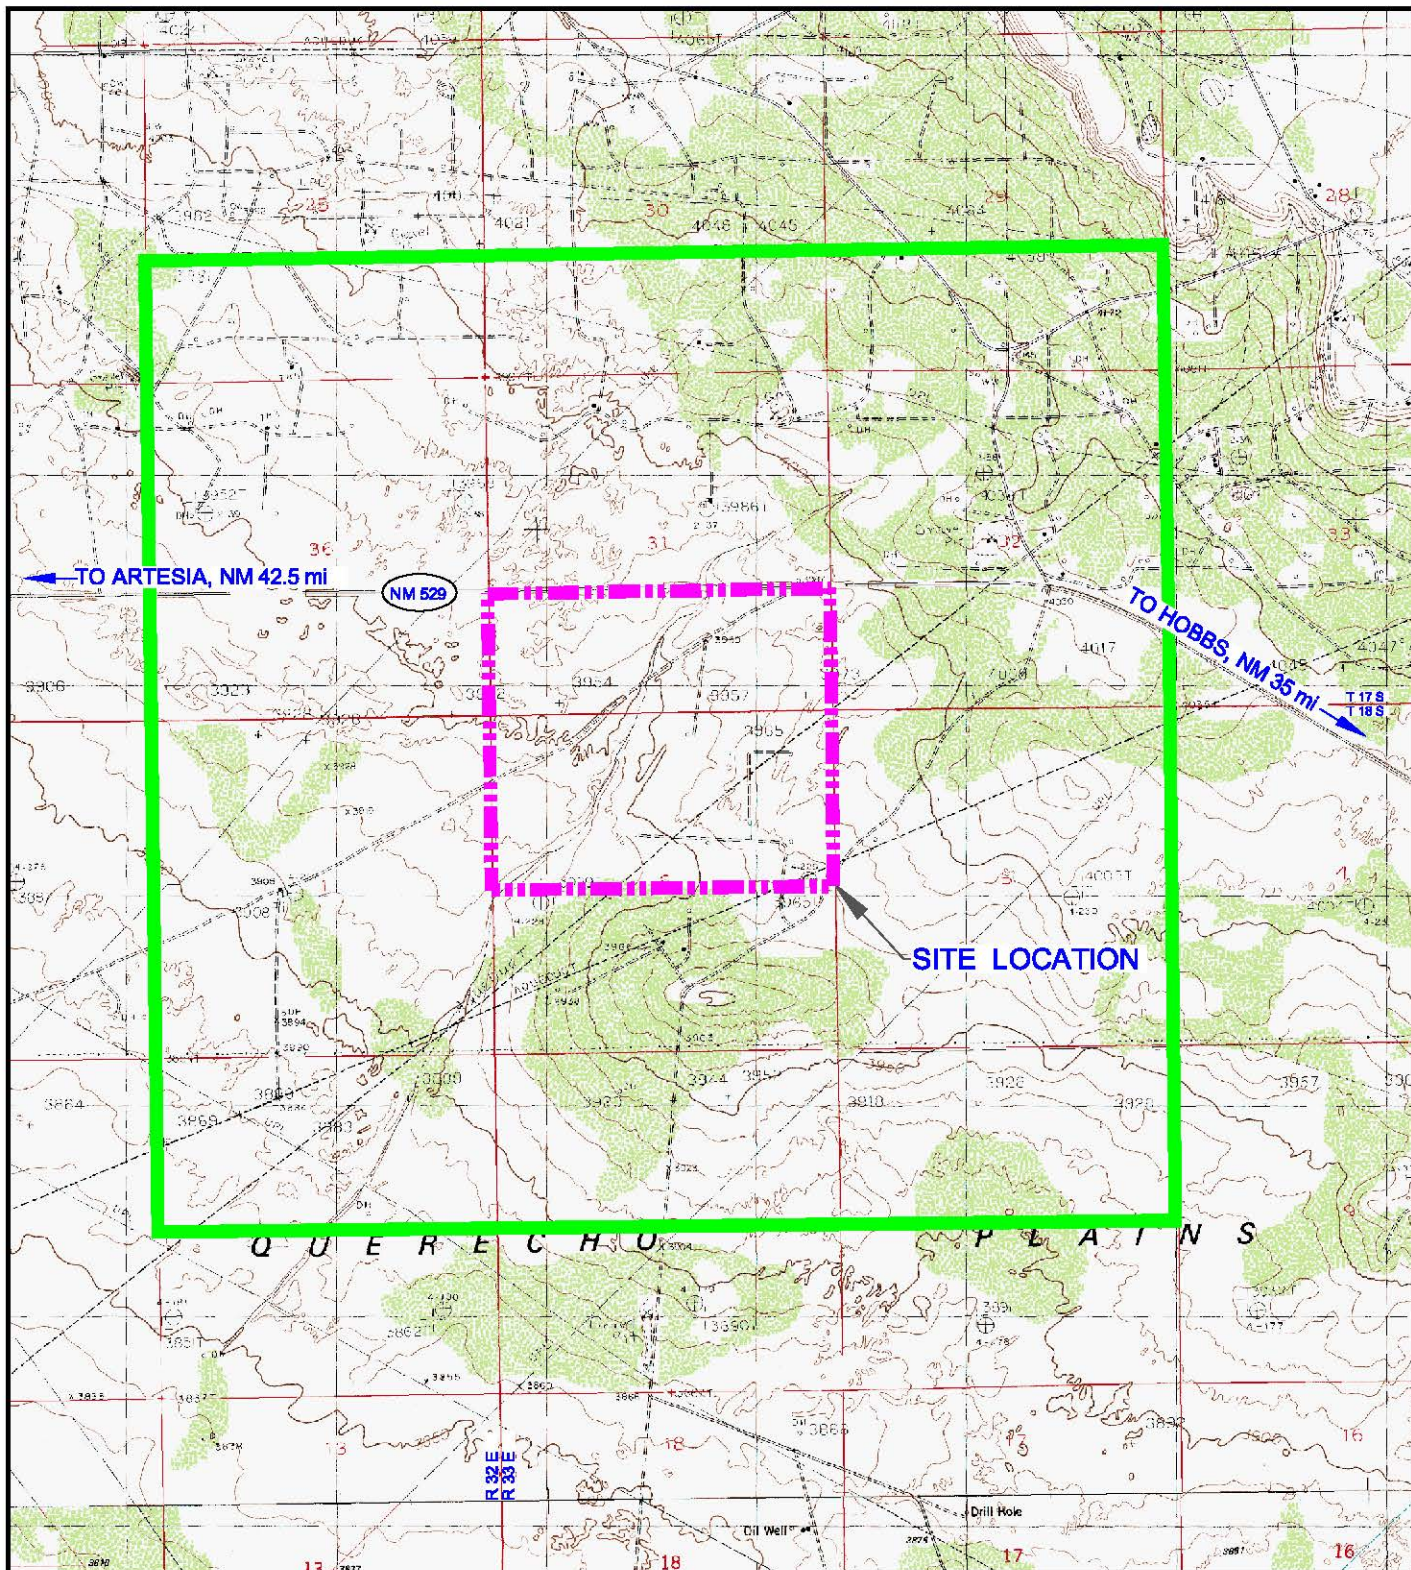


LEGEND

- SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acad 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:53:00 ; LAYOUT: A(P)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.6.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

1.3 Purpose

This Migratory Bird Protection Plan (the Plan) for the DNCS Facility has been prepared in accordance with requirements of 19.15.36.13.I and 19.15.36.17.C.(3) NMAC. This Plan describes the procedures for migratory bird protection at DNCS. DNCS is not proposing to install screening, netting or covering over the evaporation ponds. Instead, DNCS is proposing alternate procedures that have proven historically effective in discouraging bird propagation; and which fulfill the requirements of 19.15.36.13.I and 19.15.36.17.C.(3) NMAC for equal protection of migratory birds.

This Plan may be modified by DNCS to address changes in site conditions following OCD review and approval of the proposed change. This Plan may also be amended at the request of OCD should conditions warrant.

2.0 MIGRATORY BIRD PREVENTION

2.1 Siting Perspective

DNCS proposes an exception to the screening/netting requirements of 19.15.36.17.C.(3) NMAC, although DNCS plans to meet the requirements of this Rule through an alternative monitoring method described herein. Additionally, DNCS does not anticipate that the ponds will be potentially hazardous to migrating birds as oil will be removed from the water prior to discharge into ponds. There is a significant absence of habitat for migratory birds congregating around, or landing in, the vicinity of the DNCS Facility. This is due primarily to the lack of a food source at the Facility that limits avian sustainability, and the lack of other nearby suitable habitat. In addition, as documented in Volume IV.1 (Siting Criteria), no evidence of wetlands are documented at the site.

2.2 Human and Mechanical Intervention

DNCS Processing Area operations, as proposed in this Application, have been designed to eliminate oil from accumulation on the evaporation ponds. This will be accomplished utilizing tanks and equipment that separate the oil from the water prior to discharge into the evaporation ponds. The anticipated absence of oil in the evaporation ponds eliminates the concerns typically associated with migratory birds being endangered if they land on the evaporation ponds. In the

unlikely event that oil is found on an evaporation pond, the following actions will be implemented. Operations at the Processing Area Facility will be manned by at least two employees 24 hours per day. During the occurrence the Facility Manager, operators and employees will conduct periodic (every fifteen minutes) inspection rounds making note of any migratory bird activity in or surrounding the evaporation ponds. Should migratory bird activity be discovered at the Facility, inspection and scare tactic frequency will be increased to alleviate the roosting of the birds.

In order to prevent oil sheen accumulation on the surface of the ponds (19.15.36.17.C.(1) NMAC), Facility personnel will work continually throughout each day to ensure the Produced Water Settling Tanks are functioning properly, removing the oil from the water prior to discharging to the evaporation ponds. If oil is observed on the evaporation ponds, effort will be made to remove the visible oil layer from the evaporation ponds immediately. This will be accomplished by using booms to bring the oil sheen to the banks of the ponds where the oil will be removed by vacuum trucks and returned to the Produced Water Receiving Tanks.

Operations will not lend the Facility to migratory bird congregation, with proposed operations 24 hours per day, 7 days per week, and 365 days per year. During this time, the mechanical evaporation systems will be in full operation, truck traffic will be consistently entering and leaving the Facility, and pumps will be transferring waters to and from the evaporation ponds. General activities at the site will involve human and truck motion, a natural deterrent to wildlife.

3.0 MIGRATORY BIRD LANDING CONTINGENCY

3.1 Migratory Bird Rescue

In the unlikely event that a bird lands on a pond and becomes contaminated, Facility employees will immediately utilize a boat and side ropes to retrieve the bird. Upon retrieval, Facility employees will transport the bird to a local veterinary clinic for treatment. Bird rescue procedures adapted from those of the International Bird Rescue Research Center are provided in **Table II.6.1.**

TABLE II.6.1
Bird Rescue Protocol
DNCS Environmental Solutions

- a. The bird's entire body is immersed in a one percent solution of Dawn and warm water (warm enough to approximate the bird's internal body temperature. Once wet, the bird is unable to thermo regulate) by one person while a second vigorously agitates the water into the bird's feathers.
- b. A WaterPik® filled with the same solution is used to clean the head.
- c. A soft toothbrush and cotton swabs are used to loosen dried oil around the head and eye area.
- d. When the water becomes dirty, the bird is moved to a second pan. The washing process is repeated as often as necessary.
- e. The bird is considered clean when the tub of water is clear and free of oil.
- f. The bird is moved to another pan of clean warm water for rinsing.
- g. A WaterPik filled with the warm water is used to clean the head.
- h. When the water becomes soapy, the bird is moved to a second pan. The rinsing process is repeated as often as necessary to remove the remaining soap.
- i. The bird is considered rinsed when no soap is visible in a fresh pan of water.
- j. After wash and rinse, the cleaned bird is placed in a protective net-bottomed pen. As it rests, the bird will begin to preen its own feathers back into place. The complete realignment of feathers in a tight overlapping pattern creates a waterproof seal.
- k. The bird is fed a nutritious food mixture to assure proper nourishment, plenty of fluids, as well as vitamins and medications, and is allowed free access to food.
- l. The bird is released when it is stable, healthy, and completed preening. The bird shall be taken to a local veterinary clinic for examination prior to release.

3.2 Screening and Netting

Although it is highly unlikely the DNCS Facility will have a migratory bird issue based on the described preventative methodology and lack of suitable habitat and food, DNCS is committed to the protection of migratory birds. Should migratory bird landings become an ongoing concern, DNCS will implement more aggressive techniques, such as netting or screening, after review and discussion with OCD and wildlife experts.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

TABLE OF CONTENTS

| Section No. | Title | Page |
|--------------------|--|-------------|
| 1.0 | PROJECT OBJECTIVES | II.7-1 |
| 2.0 | PROJECT ORGANIZATION | II.7-4 |
| 2.1 | Project Organization | II.7-4 |
| 2.2 | Authority and Responsibilities | II.7-4 |
| 2.3 | Documentation | II.7-6 |
| 3.0 | CONSTRUCTION QUALITY ASSURANCE OBJECTIVES | II.7-7 |
| 3.1 | Allowable Variations | II.7-7 |
| 4.0 | SITE PREPARATION..... | II.7-8 |
| 4.1. | General | II.7-8 |
| 4.2. | Survey Coordinate System | II.7-8 |
| 4.3. | Subgrade Development | II.7-9 |
| 4.4. | Final Subgrade Inspection and Protection..... | II.7-10 |
| 4.5. | Subgrade and Berm Testing | II.7-10 |
| 5.0 | ANCHOR TRENCH..... | II.7-11 |
| 6.0 | GEOSYNTHETIC CLAY LINER (GCL) | II.7-11 |
| 6.1 | GCL Properties | II.7-11 |
| 6.2 | Delivery, Storage and Handling | II.7-12 |
| 6.3 | Manufacturer Quality Control Documentation | II.7-12 |
| 6.4 | Conformance Testing | II.7-13 |
| 6.5 | GCL Placement | II.7-14 |
| 6.6 | Field Seams | II.7-14 |
| 6.7 | Field Quality Control | II.7-15 |
| 6.8 | Repair Procedures | II.7-15 |
| 6.9 | GCL Acceptance | II.7-16 |
| 7.0 | FLEXIBLE GEOMEMBRANE LINER (FML) | II.7-16 |
| 7.1 | Manufacturer Quality Control Documentation | II.7-17 |
| 7.2 | Conformance Testing | II.7-18 |
| 7.3 | Delivery, Storage and Handling | II.7-22 |
| 7.4 | Guarantee | II.7-22 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

| | | |
|------|---|---------|
| 7.5 | Quality Assurance | II.7-22 |
| 7.6 | Geomembrane Placement | II.7-23 |
| 7.7 | Hot Wedge Fusion Welding..... | II.7-26 |
| 7.8 | Extrusion Welding | II.7-27 |
| 7.9 | Field Quality Control | II.7-29 |
| 7.10 | Destructive Seam Testing | II.7-30 |
| 7.11 | Repair Procedures | II.7-32 |
| 7.12 | Geomembrane Acceptance | II.7-33 |
| 8.0 | GEONET..... | II.7-33 |
| 8.1. | Geonet Properties | II.7-33 |
| 8.2 | Manufacturer Quality Control Documentation | II.7-33 |
| 8.3 | Conformance Testing..... | II.7-34 |
| 8.4 | Delivery, Storage and Handling | II.7-35 |
| 8.5 | Guarantee | II.7-35 |
| 8.6 | Geonet Installation | II.7-35 |
| 8.7 | Field Quality Control | II.7-37 |
| 9.0 | PROTECTIVE SOIL LAYER AND SELECT AGGREGATE..... | II.7-37 |
| 9.1 | Protective Soil Layer..... | II.7-37 |
| 9.2 | Select Aggregate | II.7-38 |
| 9.3 | Conformance Testing..... | II.7-38 |
| 9.4 | Delivery, Storage and Handling | II.7-38 |
| 9.5 | Protective Soil Layer Placement | II.7-38 |
| 9.6 | Select Aggregate Placement..... | II.7-39 |
| 9.7 | Field Quality Control | II.7-40 |
| 9.8 | Protective Soil Layer – Thickness Confirmation Procedure..... | II.7-40 |
| 10.0 | GEOTEXTILE | II.7-41 |
| 10.1 | Geotextile Properties..... | II.7-41 |
| 10.2 | Manufacturer’s Quality Control Documentation | II.7-41 |
| 10.3 | Conformance Testing..... | II.7-42 |
| 10.4 | Installation..... | II.7-43 |
| 11.0 | GEOPipe | II.7-44 |

APPLICATION FOR PERMIT DNCS ENVIRONMENTAL SOLUTIONS

VOLUME II: FACILITY MANAGEMENT PLANS SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN

| | | |
|------|--|---------|
| 11.1 | General | II.7-44 |
| 11.2 | HDPE Geopipe Material Properties | II.7-44 |
| 11.3 | Polyvinyl Chloride (PVC) Geopipe Material Properties | II.7-45 |
| 11.4 | Manufacturer's Quality Control Documentation | II.7-46 |
| 11.5 | Delivery, Storage and Handling | II.7-46 |
| 11.6 | Quality Assurance | II.7-46 |
| 11.7 | Installation..... | II.7-46 |
| 12.0 | ENGINEERING CERTIFICATION..... | II.7-50 |

LIST OF TABLES

| Table No. | Title | Page |
|-----------|---|---------|
| II.7.1 | SUMMARY OF REQUIRED CQA STANDARDS | II.7-2 |
| II.7.2 | CQA FORMS INDEX | II.7-7 |
| II.7.3 | TECHNICAL SPECIFICATION: GEOSYNTHETIC CLAY LINER | II.7-11 |
| II.7.4 | TECHNICAL SPECIFICATIONS: 60-MIL HDPE TEXTURED GEOMEMBRANE | II.7-19 |
| II.7.5 | TECHNICAL SPECIFICATIONS: 60-MIL HDPE SMOOTH GEOMEMBRANE | II.7-20 |
| II.7.6 | TECHNICAL SPECIFICATIONS: 30-MIL REINFORCED POLYESTER GEOMEMBRANE..... | II.7-21 |
| II.7.7 | GEOMEMBRANE PROJECT CQA FORMS | II.7-23 |
| II.7.8 | TYPICAL WEDGE TEMPERATURE RANGES FOR HOT WEDGE SEAMING OF THERMOPLASTIC LINERS | II.7-26 |
| II.7.9 | TECHNICAL SPECIFICATIONS: HDPE GEONET | II.7-33 |
| II.7.10 | PROTECTIVE SOIL LAYER: THICKNESS CONFIRMATION PROCEDURE..... | II.7-40 |
| II.7.11 | TECHNICAL SPECIFICATIONS: NON-WOVEN GEOTEXTILE | II.7-42 |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

LIST OF ATTACHMENTS

| Attachment No. | Title |
|-----------------------|--|
| II.7.A | LINER QUALITY CONTROL PROJECT SPECIFICATIONS |
| II.7.B | APPROVAL/AUTHORIZATION TO PROCEED FORM |
| II.7.C | DAILY SUMMARY REPORT |
| II.7.D | FIELD COMPACTION TESTING FORM |
| II.7.E | GCL INVENTORY CONTROL LOG |
| II.7.F | FML INVENTORY CONTROL LOG |
| II.7.G | GEONET INVENTORY CONTROL LOG |
| II.7.H | GEOTEXTILE INVENTORY CONTROL LOG |
| II.7.I | LEACHATE COLLECTION AND EXTRACTION PIPE INVENTORY CONTROL LOG |
| II.7.J | GCL DEPLOYMENT LOG |
| II.7.K | FML DEPLOYMENT LOG |
| II.7.L | FML TRIAL SEAMING TEST LOG |
| II.7.M | FML SEAMING LOG |
| II.7.N | FML SEAM PRESSURE TEST LOG |
| II.7.O | FML DESTRUCTIVE FIELD TEST RECORD |
| II.7.P | FML SEAM VACUUM TEST/REPAIR LOG |
| II.7.Q | GEONET DEPLOYMENT LOG |
| II.7.R | GEOTEXTILE DEPLOYMENT LOG |

APPLICATION FOR PERMIT DNCS ENVIRONMENTAL SOLUTIONS

VOLUME II: FACILITY MANAGEMENT PLANS SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN

1.0 PROJECT OBJECTIVES

The Construction Quality Assurance (CQA) Plan has been developed to document the measures that will be used to ensure that the environmental control systems will be constructed in compliance with:

- 19.15.36.14.D NMAC
- 19.15.36.14.E NMAC
- 19.15.36.17.B NMAC
- The approved Permit Plans
- The permit and any permit conditions
- This CQA Plan
- Industry standards and other applicable technical criteria

This CQA Plan establishes the quantitative criteria that will be used in the field and laboratory to measure the quality of the installed infrastructure. Specific construction elements that are addressed in this Plan includes:

- Inspection and compaction of the subgrade and liner foundation
- Installation of the geosynthetic clay liner
- Installation of the primary geomembrane
- Installation of the geonet leak detection layer
- Installation of the secondary geomembrane
- Installation of the leachate drainage layer and collection system
- Installation of the protective soil layer
- Ancillary installations as needed to complete the above

This CQA Plan is a quality control plan meeting the specifications of 19.15.36.14.D NMAC, 19.15.36.14.E NMAC, and 19.15.36.17.B NMAC. No revisions to the technical specifications should be allowed without the express approval of the Engineer. The Engineer is a registered professional engineer in New Mexico with applicable experience in geosynthetics design and construction. This Plan may be updated to address changes in materials, technologies, test methods, etc. in consultation with the New Mexico Energy, Minerals and Natural Resources Department, Oil Conservation Division; and more specifically revisions will be made to the applicable geosynthetics testing standards as implemented. Additionally, the Oil Conservation Division shall be notified at least 72 hours prior to primary liner installation so the leak detection layer may be inspected.

Table II.7.1 lists the applicable testing required for each construction element. The Table identifies:

- Key property being evaluated
- The appropriate type of test procedure and method
- The sampling strategy and frequency

TABLE II.7.1 (SHEET 1 of 2)
Summary of Required COA Standards

| Element | Key Property | CQA/CQC Test | Sampling Plan | Sampling Frequency | Standard Test Method |
|--|------------------------------|---|-------------------------------------|-----------------------------------|--|
| Excavation Required: Subgrade Layer Material Evaluation | Maximum Density | Proctor Test | Judgmental | 1 per 5000 cy | ASTM D698 |
| Fill Required: Subgrade Layer Material Evaluation | Maximum Density | Proctor Test | Judgmental | 1 per 5000 cy | ASTM D698 |
| Subgrade Layer Construction Quality Evaluation | In-Place Density | Nuclear Density Test | Random within grid | 4 per acre per lift | ASTM D2922 |
| | No angular stones | Visual | Judgmental | 100% | NA |
| Geosynthetic Clay Liner | Conformance | Mass per unit area, Free Swell, Fluid Loss | Systematic | 1 per 100,000 sf | ASTM D5993, D5890, D5891 |
| | Surface Defects | Visual | 100% | 100% | NA |
| Primary and Secondary Liner Geomembrane | Conformance | Thickness, Density, Tensile properties, Tear resistance, Carbon black content, Carbon black dispersion, Puncture resistance | Systematic | 1 per 100,000 sf | ASTM D5199/D5994, D1505, D6693, D1004, D1603, D5996, D4833 |
| | Surface Defects | Visual | 100% | 100% | NA |
| Primary and Secondary Liner Geomembrane Seaming Procedures | Subgrade | Visual | 100% | 100% | NA |
| | Anchor Trench | Visual | 100% | 100% | NA |
| | Temporary Anchor | Visual | 100% | 100% | NA |
| | Sheet Placement | Visual | 100% | 100% | NA |
| | Overlap of Sheets | Measurement | 100% | 100% | NA |
| | Cleanliness of Seam | Visual | 100% | 100% | NA |
| | Extent of Grinding | Measurement | 100% | 100% | NA |
| Liner Geomembrane Seams | Test Seams | Tensiometer | Systematic | in accordance with specifications | NA |
| | Field Hot Wedge Seams | Non-Destructive Tests (Pressure Dual Seam) | 100% | 100% | NA |
| | | Destructive Tests (peel & shear strength) | Random within a grid and Judgmental | 1 per 500 feet | ASTM D413 and D6392 |
| | Field Extrusion Fillet Seams | Non-Destructive Tests (Vacuum Box Testing) | 100% | 100% | ASTM D4437 |
| | | Destructive Tests (peel & shear strength) | Random within a grid and Judgmental | 1 per 500 feet | ASTM D413 and D6392 |

TABLE II.7.1 (SHEET 2 of 2)
Summary of Required COA Standards

| Element | Key Property | CQA/CQC Test | Sampling Plan | Sampling Frequency | Standard Test Method |
|----------------------------|------------------------------------|---|---------------|--------------------|--|
| Geonet | Conformance | Thickness, Density, Wide width tensil properties, Mass per unit area, Carbon black, Melt index | Systematic | 1 per 100,000 sf | ASTM D4354, D1777, D1505, D1682, D3776, D1603, D1238 |
| | Anchor Trench | Visual | 100% | 100% | NA |
| | Temporary Anchor | Visual | 100% | 100% | NA |
| | Sheet Placement | Visual | 100% | 100% | NA |
| | Overlap and Tying of Sheets | Measurement | 100% | 100% | NA |
| Protective Soil Layer | Permeability | Lab Permeability | Random | 1 per Source | ASTM D2434 or Falling Head |
| | Particle Size | Gradation of Soil | Random | 1 per 1,500 cy | ASTM C136 |
| | Thickness of Protective Soil Layer | Surveying or Direct Test | Within a grid | 5 per acre | NA |
| Geotextile | Conformance | Thickness, Weight, Tensile strength, Mullen burst strength, Puncture strength, Trapezoidal tear strength, AOS | Systematic | 1 per 100,000 sf | ASTM D5199, D5261, D4632, D3786, D4833, D4533, D4751 |
| | Overlap | Measurement | 100% | 100% | NA |
| | Seams | Visual Observation | 100% | 100% | NA |
| Leachate Collection System | Grade | Surveying | NA | 1 per 50 lf | NA |
| | Product specs, placement and | Visual Observation | 100% | 100% | NA |
| Leachate Pipe Envelope | Minimize clogging | Gradation of Gravel | Random | 1 per Source | ASTM C136 |
| | Placement and workmanship | Visual Observation | 100% | 100% | NA |

2.0 PROJECT ORGANIZATION

2.1 Project Organization

The Project Team shall be identified in advance of construction, and each Team member will be assigned specific responsibilities as discussed in this section.

2.2 Authority and Responsibilities

2.2.1 Owner

The Owner has the responsibility for scheduling and administration, which may include, but not be limited to:

- Contractor procurement.
- Some or all of the construction tasks.
- Assignments of duties of Project Team and orientation of the Project Staff to the needs and requirements of the project.
- Approval of project-specific procedures and internally prepared plans, drawings, and reports.
- Serving as the "Collection point" for Project Staff reporting project documents and activities.
- Point of collection for archived destruction test (DT) samples.

2.2.2 Site CQA Engineer

The Site CQA Engineer shares responsibilities with the Owner/Operator for addressing technical and administrative issues. The Site CQA Engineer must be present at the outset of major undertakings and at critical times during the construction. The Site CQA Engineer's staff shall be on-site continually for construction activities. The Site CQA Engineer will also be on-site, as necessary, to perform the following:

- Periodic review of submittals from the Site CQA Manager.
- Approval of any CQA Plan revisions.
- Administrative functions as necessary to staff and maintain personnel for the CQA activities.
- Periodic review and assessment of the CQA Plan as implemented to determine completeness and compliance.
- Spot-checking of field and laboratory methods and results for accuracy.
- Acceptance and approval of materials and workmanship.
- Compilation and submission of Certification Reports and other project deliverables.
- Design and certification responsibilities mandate that this site CQA Engineer must be a Professional Engineer properly registered in the State of New Mexico; who possesses demonstrated competence and experience in waste containment engineering.

2.2.3 Site CQA Manager

- Review moisture-density curves correlated to compaction specifications for the borrow source or in-situ subgrade.
- Review Field Grain Size Analysis of materials to confirm suitability.
- Perform nuclear density testing as necessary for in-place compaction confirmations.
- Conduct verification testing for thickness and placement of materials.
- Perform inspection and documentation of synthetic materials installation.
- Review of documentation from contractors as enumerated in this CQA Plan.
- Review CQA activities.
- Notification to appropriate personnel of nonconformance, or changes in CQA procedures.
- Completion of Project CQA audits.
- Scheduling, at regular intervals, CQA meetings with project staff and Subcontractors.
- Reporting, on a regular basis, to the Site CQA Engineer the results of reviews, inspections, and audits.
- Identifying for the Site CQA Engineer project issues, which require his direct involvement.
- Maintaining records of reviews, inspections, audits, and their results.
- Collection of Daily Field Reports from Contractor, which are to be provided no later than 24 hours after each shift has ended.
- Maintenance of calibration records of the instrumentation used on-site in the implementation of this plan.
- Other duties as directed by the Site CQA Engineer.

2.2.4 Contractor

Responsibilities of the Contractor may include:

- A) Management of daily field operations (labor and equipment allocation).
- B) Submission of Daily Field Progress Reports to the Site CQA Manager.
- C) Implementation of tasks relative to this CQA Plan specific to his assigned construction activities per contract.
- D) Submittal of required as-built drawings and certificates to the Site CQA Manager.
- E) Submittal of required work plans to the Site CQA Engineer.

Work and materials installed by the Contractor shall be guaranteed for at least two (2) years from date of completion.

The Contractor/Installer must construct this project in a workmanlike manner, in conformance with the plans and specifications. The purpose of the CQA program is to provide independent confirmation of compliance with the plans and specifications for the Owner's benefit.

2.3 Documentation

1. Data will be gathered or developed in accordance with procedures appropriate for the intended use of the data and will be of significant or greater quality to stand up to scientific and regulatory scrutiny.
2. Data will be of known or acceptable precision, accuracy, representativeness, completeness, and comparability within the limits of the project.

The quality of the measurement data can be defined in terms of the following elements:

1. Completeness - the adequacy in quantity of valid measurements to reduce the potential for misinterpretation.
2. Representativeness - the extent to which discrete measurements accurately describe the greater picture of which they are intended to represent. Good representativeness is achieved through careful, informed selection of sampling site.
3. Accuracy and Precision - the agreement between a measurement and the true value and the degree of variability in this agreement, respectively. Accuracy and precision of data collected in the investigation will depend upon the measurement standards used and the competent use of them by qualified personnel.
4. Comparability - the extent to which comparisons among different measurements of the same quantity or quality will yield valid conclusions. Comparability among measurements will be achieved through the use of standard procedures and standard field data sheets.
5. Traceability - the extent to which data can be substantiated by hard-copy documentation. Traceability documentation exists in two essential forms: that which links quantitation to authoritative standards, and that which explicitly describes the history of each sample from collection to analysis.

The fundamental mechanisms that will be employed to achieve these quality goals can be categorized as prevention, assessment and correction, as follows:

1. Prevention of defects in the quality through planning and design, documented instructions and procedures, and careful selection and training of skilled, qualified personnel;
2. Quality assessment through a program of regular audits and inspections to supplement continual informal review;
3. Permanent correction of conditions adverse to quality through a closed-loop corrective action system.

The Site CQA Manager shall maintain current records, on appropriate CQA forms, of quality control operations, inspections and tests performed relative to the work of suppliers and contractors. **Table II.7.2** is an index of CQA Forms which are typically used for the Liner CQA program.

TABLE II.7.2
CQA Forms Index

| Form No. | Title |
|-----------------|--|
| 1. | Liner Quality Control Project Specifications (Attachment II.7.A) |
| 2. | Approval/Authorization to Proceed Form (Attachment II.7.B) |
| 3. | Daily Summary Report (Attachment II.7.C) |
| 4. | Field Compaction Testing Form (Attachment II.7.D) |
| 5. | GCL Inventory Control Log (Attachment II.7.E) |
| 6. | FML Inventory Control Log (Attachment II.7.F) |
| 7. | Geonet Inventory Control Log (Attachment II.7.G) |
| 8. | Geotextile Inventory Control Log (Attachment II.7.H) |
| 9. | Leachate Collection and Extraction Pipe Inventory Control Log (Attachment II.7.I) |
| 10. | GCL Deployment Log (Attachment II.7.J) |
| 11. | FML Deployment Log (Attachment II.7.K) |
| 12. | FML Trial Seaming Test Log (Attachment II.7.L) |
| 13. | FML Seaming Log (Attachment II.7.M) |
| 14. | FML Seam Pressure Test Log (Attachment II.7.N) |
| 15. | FML Destructive Field Test Record (Attachment II.7.O) |
| 16. | FML Seam Vacuum Test/Repair Log (Attachment II.7.P) |
| 17. | Geonet Deployment Log (Attachment II.7.Q) |
| 18. | Geotextile Deployment Log (Attachment II.7.R) |

Photographs may also be used to document the progress and acceptability of the work and may be incorporated into the Daily Summary Report; if photographic documentation is used, each photo shall be identified with the following information:

- Date
- Time of Day
- Location

Originals of the photographs will be retained at the offices of the Site CQA Engineer, and select photocopies will be submitted with Engineering Certification Reports as applicable.

3.0 CONSTRUCTION QUALITY ASSURANCE OBJECTIVES

3.1 Allowable Variations

It is the objective of this CQA Plan that test results must meet the applicable specified values. Should a test result not achieve the specified value for a material, it must be replaced or repaired; or for operation, the operation must be repeated until it is acceptable. However, as stated by Daniel and Koerner, *"it is unrealistic to think that 100 percent of all CQA tests will be in compliance with specifications."* Variations due to isolated anomalies in material, sample disturbance, human testing errors, or other factors may result in failing tests, yet these tests are not indicative of the general quality of the construction. For this reason, the Site CQA Engineer

may accept a small percentage of outliers. The total number of outliers will not exceed the maximum allowable number as defined in Waste Containment Facilities – Guidance for Construction Quality Assurance and Construction Quality Control of Liner and Cover Systems 2nd Edition (Daniel, D.E. and Koerner, R.M.), 2007.

4.0 SITE PREPARATION

4.1. General

The following is a list of the work to be included in site preparation by the Contractor:

- A) Field check utilities and groundwater monitoring well locations, as appropriate.
- B) Mark survey hub markers and permanent benchmarks.
- C) Strip topsoil and any other material deemed unsuitable by the Engineer, or his representative, and stockpile at designated location.
- D) Strip or remove brush, and non-mowable vegetation, surface debris and similar materials from existing surface and relocate to a designated area on the site. Stumps, logs, roots, etc. will be completely removed.
- E) Excavate to design grade at the direction of the Site CQA Manager.
- F) The existing surfaces will be proof rolled to check stability conditions of existing surface and to provide a trafficable, reasonably smooth, working surface for construction equipment.
- G) Contractor will be responsible for costs associated with repairing and/or replacement of the ground surface utilities, and appurtenant facilities damaged by the Contractor, to the satisfaction of the Owner. Any damage resulting from unauthorized intrusion upon or use of off-site areas will be completely and immediately repaired, solely at the expense of the Contractor.

The following is a list of requirements related to site grading:

- A) Relocate exposed debris outside the limits of the construction area to locations as directed by Owner.
- B) Remove and dispose of coarse vegetation. Vegetation removal will be accomplished in such a manner as to minimize the amount of bare soil exposed at any given time.
 - 1) Stripped vegetation may be stockpiled temporarily at the site, provided that it is stockpiled in a manner, which prevents movement of the material off-site due to wind, water, or other factors.
 - 2) Residual vegetative matter, such as stumps, will be transported to the designated on-site area or removed off-site by the Contractor under authorization by the Owner.

4.2. Survey Coordinate System

The site will be surveyed and integrated into a grid system so that locations of sample and testing points made during construction can be readily discernible by the CQA personnel. This grid system should consist of equidistant spaced parallel lines, 100-foot on center, projecting north to south and east to west within the limits of the site. In addition, permanent project benchmarks will be placed by the Owner or his representative in the vicinity of the site for correlation of lift

thickness, site liner construction, etc. This grid system will be coincident with the existing and former site coordinate system for future reference. The project limits will be staked out by the Owner or his representative based on record drawings

4.3. Subgrade Development

Subgrade development will be required prior to landfill cell or pond construction. The existing topography will be contoured to the subgrade elevations shown on the drawings identified by the Site CQA Manager. The subgrade will be constructed, prepared and protected in accordance with the procedures stated below.

4.3.1 Subgrade Preparation

- A) Establish required lines, levels and contours. Place grade stakes as required by Contractor's methods a minimum 100' on center.
- B) Before grading commences, adjust monitoring wells and piezometer heights in the area to be graded in accordance with details shown on the drawings if applicable. Such adjustments will be made under direct surveillance of the Site CQA Manager. Any wells adjusted without the Site CQA Manager being present will be re-established at the Contractor's expense.
- C) No subgrading will begin in a given area prior to approval of the area by the Site CQA Manager.

4.3.2 Excavating to Subgrade Elevation

- A) Excavated material will be placed on-site as directed by Owner.
- B) Adequate grade control during subgrade preparation/construction is imperative. Should insufficient grade control during this phase occur, the Site CQA Manager may stop work until the situation has been rectified.

4.3.3 Filling to Subgrade Elevation and Berm Construction

- A) Engineer will collect samples of proposed in-situ or borrow fill material in advance of construction for determination of soil characteristics (e.g. Standard Proctor)
- B) Materials will be obtained from designated in-situ areas, borrow sources, or stockpiles.
- C) No fill will be used for subgrade or berm construction without approval of the Site CQA Manager.
- D) Place fill material to the required elevations as shown on the drawings.
- E) Place suitable fine grained subgrade soils in 6-inch finished lifts and compact to 90-percent of the maximum dry density, as determined by the Standard Proctor Compaction Test (ASTM D698).
- F) Place berm material in maximum 12-inch finished horizontal lifts over the prepared surface. Compact to not less than 90-percent of the maximum dry density, as determined by the Standard Proctor Compaction Test (ASTM D698).
- G) The surface of each lift will be scarified prior to placing the next lift, if applicable.
- H) The moisture content of fill material will be adjusted in the stockpile, borrow area, and/or other approved areas to maintain uniform moisture content of fill. Uniform moisture

distribution will be obtained by mixing with disc, harrow, and pulverizers or by otherwise manipulating the soil prior to compaction.

- I) The final surface of subgrade and berms will be rolled smooth, free of protrusions and will contain no lumps, angular materials or large rocks. Roll the exposed surface transverse to slopes.

4.4. Final Subgrade Inspection and Protection

The final subgrade lift will conform to the following specifications:

- A) The upper 6-inches shall be comprised of suitable fine grained soils and compacted to a minimum 90-percent of the maximum dry density as determined by the Standard Proctor Test (ASTM D698)
- B) The surface of the final lift of subgrade will be free of angular material or stones greater than one-half inch in diameter.
- C) The final lift will be wetted and smooth rolled. Abrupt changes of grade will be regraded.
- D) Completed subgrade will be protected from traffic, erosion and damage of any kind.
- E) Completed subgrade will be kept free of trash and debris.
- F) Prior to placement of liner system, any areas of subgrade damaged by traffic, erosion, settlement, or another cause, will be repaired and the grades shown on the drawings will be re-established. Exposed subgrade, which has significantly dried or exhibits desiccation will be wetted and compacted prior to fill placement. Disturbed areas will be reshaped, scarified, recompacted and rolled prior to further work.
- G) The condition of the subgrade will be approved by the Site CQA Manager prior to placement of any additional layers or liner system materials immediately in advance of installation.

4.5. Subgrade and Berm Testing

The following tests will be performed on the subgrade soils prior to compaction:

- A) One particle size distribution per 1,000-cubic yards of borrow using ASTM D422.
- B) One Standard Proctor moisture density relationship per 5,000 cubic yards of borrow using ASTM D698.
- C) One Atterberg Limits per 5,000 cubic yards of borrow using ASTM D423 and D424.

The following tests will be performed during construction:

- A) One field compaction test will be performed at a frequency of a minimum 4 tests per acre per 6-in lift for confirmation of density of the subgrade soils and 12-in for confirmation of density of soils used in berm construction.
- B) The subgrade will be required to meet an elevation tolerance of $0.2' \pm$; and the sidewalls a vertical tolerance of $0.50' \pm$ based on a regular grid established by site survey.

5.0 ANCHOR TRENCH

1. The anchor trench shall be constructed as shown on the construction drawings and as specified in the CQA Plan. The anchor trench shall be backfilled and compacted by the Contractor as approved by the Site CQA Manager. Trench backfill material shall be placed and compacted by rolling with a rubber-tired wheel or mechanical tampers. Approval of compaction equipment shall be obtained from the Site CQA Manager before any compaction begins.
2. Care shall be taken when backfilling the trenches to prevent any damage to the geomembrane. At no time shall construction equipment make direct contact with geosynthetic materials.
3. Anchor trench backfill shall be compacted to 90% Standard Proctor Dry Density.

6.0 GEOSYNTHETIC CLAY LINER (GCL)

6.1 GCL Properties

1. The GCL installed directly in contact with the subgrade material under the leak detection sumps in the ponds shall be a reinforced GCL, and as defined by compliance with the requirements listed in **Table II.7.3** or approved by Engineer as equivalent.

TABLE II.7.3
Technical Specifications
Geosynthetic Clay Liner (GCL)

| MATERIAL | PROPERTY | UNIT | CERTIFIED VALUE | TEST METHOD ¹ |
|------------------------------|-----------------------------|---------------------|--------------------|-----------------------------|
| Nonwoven Cover Geotextile | Grab Strength | lbs | 170 | ASTM D4632 |
| | Grab Elongation | % | 50 | ASTM D4632 |
| | Mass/Unit Area | oz/yd ² | 6.0 | ASTM D5261 |
| Bentonite | Free Swell | ml | 24/2g min | ASTM D5890 |
| | Fluid Loss | ml | 18 max | ASTM D5891 |
| | Bentonite Mass/Unit Area | lbs/ft ² | 0.75 | ASTM D5993 |
| | Grab Strength ² | lbs | 90 | ASTM D4632 |
| | Permeability | cm/sec | 5x10 ⁻⁹ | ASTM D5887 |
| Woven Base Fabric | Mass/Unit Area | oz/yd ² | 3.2 | ASTM D5261 |
| GCL Hydrated Internal | Shear Strength | lbs/ft ² | 500 | ASTM D5321 ASTM D6243 |

Notes:

1. Standard test methods will be updated to reflect the most current industry standards.
2. Grab tensile tests in machine direction.

2. The primary component in the GCL is high-quality sodium bentonite (montmorillonite). The bentonite used in the manufacture of the GCL must be demonstrated to meet the testing and acceptance criteria listed in **Table II.7.3**. The testing shall be performed on the bentonite obtained from the finished GCL product.
3. Bentonite Sealing Compound (BSC) and Granular Bentonite (GB) shall be applied to ensure tightness at penetrations and structures. The BSC and GB shall be supplied by the manufacturer and shall be comprised of the same bentonite used in the manufacturing of the GCL. The BSC shall be a mixture of non-aqueous liquid suspension agent, which creates a paste-like texture. The suspension agents used in the manufacture of the BSC shall be non-toxic, water- soluble and shall not restrict the bentonite's ability to swell and absorb water upon hydration.
4. Longitudinal seams can also be sealed using the Winning Edge™ which eliminates the need for free bentonite on those seams.

6.2 Delivery, Storage and Handling

1. The GCL rolls shall be packaged and shipped by appropriate means to prevent damage of the geomembrane rolls. Off-loading and storage of the GCL is the responsibility of the Contractor/Installer. The Contractor shall be responsible for replacing any damaged or unacceptable material discovered upon arrival at no cost to the Owner.
2. The GCL storage area will be designated by the Site CQA Manager/Owner. No off-loading shall be performed unless the Site CQA Manager is present. Damage during off-loading shall be documented by the Site CQA Manager. Any damaged rolls must be separated from the undamaged rolls until the proper disposition of that material has been determined by the Site CQA Manager.
3. A steel support pipe shall be inserted through the roll core. Slings or lifting chains shall be attached at the ends of the support pipe to the bucket of a front-end loader or lifting device. A spreader bar, which is used to support the pipe, must be long enough to prevent damage to the edges of the GCL during hoisting.
4. The rolls of GCL shall be stored in their original, unopened, wrapped cover in a clean, dry area, stacked no higher than three rolls high. The material shall be stored off the ground on pallets and shall be covered with a heavy, protective tarpaulin or enclosed within a storage facility. Care shall be used to keep the bentonite clean and free from debris prior to installation.
5. The installer shall be responsible for the transportation of each roll of GCL from the storage area to its proposed panel location. The contractor shall not drive upon the GCL panels with equipment exceeding 6 psi and shall be responsible for replacing any material damaged during installation until the GCL is accepted by the Site CQA Manager/Owner.

6.3 Manufacturer Quality Control Documentation

Prior to installation commencement of any GCL material, the Contractor shall provide the following information to the Site CQA Manager, certified by the manufacturer for the delivered GCL.

1. Manufacturer's certification verifying that the quality of the raw materials used to manufacture the GCL meets the Manufacturer specifications.
2. Each roll delivered to the project site shall have the following identification information:
 - Manufacturer's name
 - Product identification
 - Roll number
 - Roll dimensions
3. Quality control certificates, signed by the manufacturer's quality assurance manager. Each certificate shall have roll identification number, sampling procedures, frequency and test results. At a minimum, the following results shall be provided in accordance with test requirements specified in **Table II.7.3**:
 - Free swell (ASTM D5890)
 - Fluid loss (ASTM D5891)
 - Bentonite mass/unit area (ASTM D5993)
 - Grab strength (ASTM D4632)
 - Permeability (ASTM D5887)

6.4 Conformance Testing

1. The Site CQA Manager will group the documentation of the delivered rolls into the manufacturer's listed lot numbers. The Site CQA Manager may, at his/her discretion, subdivide the manufacturer's listed lots into smaller lots for purposes of conformance testing.
2. Based on the requirements outlined in ASTM D4354, the Site CQA Manager will determine the number of sampling units within each lot or at a minimum, 1 test per 100,000 ft² of delivered GCL.
3. The Site CQA Manager shall cut or observe the sampling (i.e. if contractor is responsible for conformance samples) from randomly selected rolls which have been delivered to the site, one foot wide by roll width Sampling Units, which shall be used for field and laboratory testing as described below. A measuring device and straight edge shall be used to ensure uniformity of length and width. Moisture content, bentonite content, and unit weight testing shall be performed on delivered rolls by an approved independent laboratory. The method used for determining specification conformance shall be in accordance with ASTM D4759.
 - a) The entire sample unit will be loosely rolled and the width of each sample shall also be measured and recorded.
 - b) The sample shall then be unrolled and spread out on a clean, dry area at the site. The Site CQA Manager (or Contractor) shall randomly cut five 12 inch by 6 inch specimens from varying places across the sample. Each specimen will be immediately packaged up in a "zip-lock" bag marked with the project name, roll number, lot number, and specimen number.
 - c) The five specimens shall be sent to an independent laboratory for fluid loss, bentonite content and mass per unit area testing (ASTM D5891, ASTM D5890 and ASTM D5993, respectively).

- i. The average of the fluid loss, bentonite content, and mass per unit area of the five specimens will be provided by the independent laboratory in accordance with ASTM D5891, ASTM D5890, and ASTM D5993.
 - ii. If any two samples from a given lot being tested for bentonite content falls below the specified values, the entire lot shall be rejected.
 - iii. If any one of the samples from a given lot being tested for bentonite content falls below the specified values, an additional set of samples shall be taken from the lot (the number of samples taken for the second set shall be equal to that taken from the first set). If any one of the samples from the second set fails to meet the specified criteria, the entire lot shall be rejected.
4. Conformance test results shall be reviewed by the Site CQA Officer and lots shall be accepted or rejected, prior to the placement of the GCL. Test results shall meet, or exceed, the property values listed in **Table II.7.3**. In case of failing test results for any given lot sample, the lot shall be resampled and retested. This retesting shall be paid for by the manufacturer. If the test values from the resamples pass the acceptable specification values listed in **Table II.7.3**, then the lot shall be accepted.

6.5 GCL Placement

1. As each roll is moved from the storage area by the Installer, the labels shall be removed by the installer and submitted to the Site CQA Manager. The rolls of GCL shall be brought to the area to be lined with a front-end loader and support pipes set up such that the GCL roll is fully supported across its length. A spreader bar or similar device shall be used to prevent the lifting chains or slings from damaging the edges. Dragging of the GCL panels over the surface shall be minimized. Travel on the GCL is permissible if low-ground pressure equipment (6 psi or less) is used. The Site CQA Manager shall be informed as to the equipment to be used and shall approve same.
2. The flexible membrane liner shall be placed over the GCL during the same day as the placement of the GCL. Only those GCL panels which can be anchored and covered the same day shall be placed in position.
3. The GCL shall not be installed in standing water or during rain. The GCL must be dry when installed and must be dry when covered.
4. In areas where wind is prevalent, GCL installation should be started at the upwind side of the project and proceed downwind. The leading edge of the GCL shall be secured at times with sandbags or other means sufficient, and approved by the Site CQA Manager, to secure it down during high winds.
5. The GCL shall be installed in a relaxed condition and shall be free of tension or stress upon completion of the installation. Stretching of the GCL to fit will not be allowed. The GCL shall be straightened to smooth out creases or irregularities in the runs.

6.6 Field Seams

1. Longitudinal seams shall be a minimum of 9 inches on the cell floor (up to 10% slope); and 12 inches for sideslopes (>10%).
2. Soil, gravel, or other debris shall be removed from the overlap area.

3. Seam overlap shall be placed such that the direction of flow is from the top sheet to the bottom sheet to form a shingle effect.
4. On slopes, runs shall be from crest to toe with the GCL machine direction running perpendicular to the base. On slopes greater than or equal to 20%, the number of seams will be minimized, and end seam overlap will be increased to a minimum of 36 inches.
5. If the temperatures are higher than 85°F and humidity is low, contraction may occur soon after placement when no confining stress or soil cover is placed. In order to account for the possibility of contraction under these conditions, the seam overlap shall be increased to a minimum of twelve inches on longitudinal seams and 36 inches on end seams, or 4% of the distance to the next parallel seam, whichever is greater. Free bentonite shall be used to seal seam. Free bentonite is not necessary on longitudinal seams if the Winning Edge™ seam is used.
6. Once the first run has been laid, adjoining runs shall be laid with 9-inch minimum overlap or use of the Winning Edge™, on the longitudinal seams and 12 inches on end seams.

6.7 Field Quality Control

1. The Installer shall provide the Site CQA Manager with daily reports addressing the following:
 - subgrade approval for areas expected to be covered by GCL
 - the total amount and location of panels placed
 - total amount and location of seams completed
 - location of repairs
 - weather conditions
2. The Installer's Superintendent and the Site CQA Manager shall provide 100% inspection of the installation to ensure compliance with the construction drawings, technical specifications, and manufacturer recommended procedures.
 - a) The surface of the GCL shall be clean and free of debris at the time of inspection.
 - b) The Installer and the Site CQA Manager shall record each roll number and lot number as panels are deployed and a general description of the location of each panel.
 - c) The Installer and the Site CQA Manager shall inspect the overlap for each panel.
 - d) The Installer and the Site CQA Manager shall inspect the anchoring and sealing around penetrations and structures.
 - e) The Installer and the Site CQA Manager shall inspect the geotextile quality, bentonite uniformity, and degree of hydration on the GCL. Areas requiring repair shall be marked and subsequently repaired in accordance with the Repair Procedures listed in this CQA Plan.
 - f) The Installer and the Site CQA Manager shall re-inspect areas previously marked as requiring repair.

6.8 Repair Procedures

1. Seam and non-seam areas of the GCL shall be inspected for identification of defects, holes, and any sign of contamination by foreign matter in accordance with the Field Quality Control procedures listed in this CQA Plan.

2. Any defects shall be repaired by the Installer, by placing a GCL patch with a minimum 12 inch overlap in all directions.
3. Horizontal patch seams shall be secured with adhesive glue as approved by the Site CQA Manager and manufacturer's recommendations.
4. Patches and repairs shall not be allowed on slopes greater than 5H:1V, unless they are securely anchored with an adhesive or other approved method. Alternatively, the patches can be placed under the defective liner in order to prevent slippage of the patch.
5. For any repair method, surfaces shall be clean and dry at the time of the repair.
6. Each completed repair shall be inspected in accordance with the Field Quality Control procedures listed in this CQA Plan.

6.9 GCL Acceptance

1. The GCL shall be accepted by the Site CQA Manager when the installation is complete, and documentation of installation is completed and verification of the adequacy of field seams and repairs, are complete.
2. Approval of any subsequent post-liner construction, as well as payment requests of the same, will not be granted until required documentation is provided by the Installer and approved by the Site CQA Officer.

7.0 FLEXIBLE GEOMEMBRANE LINER (FML)

1. The flexible membrane (FML) used for liner installation shall be textured 60-mil thick HDPE for landfill sideslopes and smooth 60-mil thick HDPE for the landfill floor and ponds. Reinforced polyester 30-mil geomembrane will be used for the tank farm and jet out pit.
2. The geomembrane shall be manufactured of new, prime first-quality products designed and manufactured specifically for the purpose of liquid containment in hydraulic structures and chemically resistant to leachate.
3. The geomembrane material shall be so produced as to be free of holes, blisters, undispersed raw materials, or any sign of contamination by foreign matter.
4. The sheets shall have NSF label of approval and shall be manufactured in a minimum 15 foot seamless width. Labels on the roll shall identify the thickness, length, width and manufacturer's lot number.
5. The geomembrane rolls shall meet the minimum properties listed in **Table II.7.4** for textured HDPE liner, **Table II.7.5** for smooth HDPE liner, and **Table II.7.6** for reinforced polyester liner.
6. Extrudate welding rods shall be of the same compound as the geomembrane and supplied by the manufacturer and shall be delivered in the original sealed containers. Each container shall have a label bearing the brand name, manufacturer's lot number and complete directions as to proper storage.

7.1 Manufacturer Quality Control Documentation

Prior to installation commencement of any geomembrane material, the Contractor shall provide to the Site CQA Manager the following information certified by the manufacturer for the delivered geomembrane.

1. Origin, identification and production of the resin (supplier's name, brand name and production plant).
2. Copies of quality control certificates issued by the resin supplier.
3. Manufacturer's certification verifying that the quality of the resin used to manufacture the geomembrane meets the resin specifications fingerprint properties shown in **Table II.7.4** for 60-mil textured HDPE liner, **Table II.7.5** for smooth HDPE liner, and **Table II.7.6** for the reinforced polyester liner.
4. Each roll delivered to the project site shall have the following identification information:
 - Manufacturer's name
 - Product identification
 - Thickness
 - Roll number
 - Roll dimensions
5. Quality control certificates, signed by the manufacturer's quality assurance manager. Each certificate shall have roll identification number, sampling procedures, frequency, and test results. At a minimum, the following test results shall be provided in accordance with applicable test requirements specified in **Tables II.7.4** and **II.7.5** for the HDPE liner:
 - Thickness (smooth, ASTM D 5199; textured, ASTM D5994)
 - Density (ASTM D1505)
 - Tensile properties (ASTM D638, as modified by annex A)
 - Tear properties (ASTM D6693)
 - Carbon black content (ASTM D 1603 or ASTM D 4218)
 - Carbon black dispersion (ASTM D5596)
 - Puncture Resistance (ASTM D4833)
 - Notched constant tensile load (ASTM D 5397, Appendix)
 - Interface Friction Angle (Textured Geomembrane) [GRI - GS -7]
6. Quality control certificates, signed by the manufacturer's quality assurance manager. Each certificate shall have roll identification number, sampling procedures, frequency, and test results. At a minimum, the following test results shall be provided in accordance with applicable test requirements specified in **Table II.7.6** for the reinforced polyester liner:
 - Thickness (ASTM D751, Optical Method)
 - Weight (ASTM D751)
 - Break strength (ASTM D751 Grab Tensile Method, Procedure A)
 - Break elongation (ASTM D751)
 - Tear strength (ASTM D751)
 - Puncture Resistance (ASTM D4833)
 - Hydrostatic resistance (ASTM D751, Procedure A)
 - Bursting strength (ASTM D751, Ball Tip)

7.2 Conformance Testing

1. Conformance testing shall be performed by an independent Quality Assurance Laboratory at a minimum of 1 per 100,000 ft². As stated in the contract documents, the Site CQA Manager or Installer shall obtain the samples from the roll, mark the machine direction and identification number. The number of lots and samples will be determined in accordance with ASTM D4354. The following conformance tests shall be conducted at the independent laboratory for the HDPE liner material:
 - Thickness (ASTM D5199, or ASTM D5994)
 - Density (ASTM D1505)
 - Tensile properties (ASTM D6693)
 - Tear resistance (ASTM D1004)
 - Carbon black content (ASTM D1603, or ASTM D4218)
 - Carbon black dispersion (ASTM D5996)
2. Conformance testing shall be performed by an independent Quality Assurance Laboratory at a minimum of 1 per 100,000 ft². As stated in the contract documents, the Site CQA Manager or Installer shall obtain the samples from the roll, mark the machine direction and identification number. The number of lots and samples will be determined in accordance with ASTM D4354. The following conformance tests shall be conducted at the independent laboratory for the reinforced polyester liner material:
 - Thickness (ASTM D751, Optical Method)
 - Weight (ASTM D751)
 - Break strength (ASTM D751, Grab Test Method, Procedure A)
 - Break elongation (ASTM D751)
 - Tear strength (ASTM D751)
 - Puncture resistance (ASTM D4833)
3. These conformance tests shall be performed in accordance with **Tables II.7.4, II.7.5, and II.7.6**.
4. Conformance test results shall be reviewed by the Site CQA Officer, and lots shall be accepted or rejected prior to the placement of the geomembrane. Test results shall meet, or exceed, the property values listed in **Tables II.7.4 and II.7.5**. If the sampling results do not meet property values for any individual lot sample, the lot shall be resampled and retested. This retesting shall be paid for by the manufacturer or installer. If the test values from the resamples pass the acceptable specification values listed in **Tables II.7.4, II.7.5, and II.7.6**, the lot shall be accepted.

TABLE II.7.4
Technical Specifications
60-mil HDPE Textured Geomembrane

| PHYSICAL PROPERTIES | | | | |
|--------------------------------------|--|-------------|--------------|-------------------------------------|
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD³ |
| Thickness | Minimum Average | mils | 57 | ASTM D5994 |
| | Lowest individual for 8 out of 10 values | mils | 54 | |
| | Lowest individual for any of the 10 values | mils | 51 | |
| Density | Minimum | g/cc | 0.94 | ASTM D1505 |
| Melt Index | Range | g/10 min | ≤1.0 | ASTM D1238 |
| Tensile Properties (each direction): | | | | ASTM D6693, Type IV Dumbbell, 2 ipm |
| Break Strength | Minimum Average | lb/in | 90 | |
| Yield Strength | Minimum Average | lb/in | 126 | |
| Elongation at Break | Minimum Average | % | 100 | G.L. = 2.0 in |
| Elongation at Yield | Minimum Average | % | 12 | G.L. = 1.3 in |
| Tear Resistance | Minimum | lb | 42 | ASTM D1004 |
| Puncture Resistance | Minimum | lb | 90 | ASTM D4833 |
| Carbon Black Content | Minimum | % | 2.0 | ASTM D1603 |
| Carbon Black Dispersion | Rating | N/A | Note 1 | ASTM D5596 |
| Asperity Height | Minimum Average | N/A | Note 2 | GRI GM 12 |
| Notched Constant Tensile Load | Minimum | hours | 300 | ASTM D5397, Appendix |
| SEAM PROPERTIES | | | | |
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD³ |
| Thickness | Minimum | mils | 60 | ASTM D5199/ D5994 |
| Bonded Seam Strength | Minimum | lb/in | 120 | ASTM D6392 |
| Tensile Properties: | | | | |
| Fusion Weld | Minimum | lb/in | 90 | ASTM D 6392 |
| Extrusion Weld | Minimum | lb/in | 78 | ASTM D6392 |

Notes:

- (1) Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
- (2) 10 mil average. 8 of 10 readings ≥ 7 mils. Lowest individual reading ≥ 5 mils.
- (3) Standard test methods will be updated to reflect the most current industry standards.

TABLE II.7.5
Technical Specifications
60-mil HDPE Smooth Geomembrane

| PHYSICAL PROPERTIES | | | | |
|--------------------------------------|----------------------------|--------------|--------------|--|
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD² |
| Thickness | Minimum Average Minimum | mils mils | 60 54 | ASTM D5199 |
| Density | Minimum | g/cc | 0.94 | ASTM D1505 |
| Melt Index | Range | g/10 min | ≤1.0 | ASTM D1238 |
| Tensile Properties (each direction): | | | | ASTM D6693, Type IV Dumbell, 2 ipm |
| Break Strength | Minimum Average | lb/in | 228 | |
| Yield Strength | Minimum Average | lb/in | 126 | |
| Elongation at Break | Minimum Average | % | 700 | G.L. = 2.0 in |
| Elongation at Yield | Minimum Average | % | 12 | G.L. = 1.3 in |
| Tear Resistance | Minimum | lb | 42 | ASTM D1004 |
| Puncture Resistance | Minimum | lb | 108 | ASTM D4833 |
| Carbon Black Content | Minimum | % | 2.0 | ASTM D1603 |
| Carbon Black Dispersion | Rating | N/A | Note 1 | ASTM D5596 |
| Notched Constant Tensile Load | Minimum | hours | 300 | ASTM D5397, Appendix |
| SEAM PROPERTIES | | | | |
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD² |
| Thickness | Minimum | mils | 60 | ASTM D5199/ D5994 |
| Bonded Seam Strength | Minimum | lb/in | 120 | ASTM D6392 |
| Tensile Properties: | | | | |
| Fusion Weld | Minimum | lb/in | 90 | ASTM D6392 |
| Extrusion Weld | Minimum | lb/in | 78 | ASTM D6392 |

Notes:

- (1) Dispersion only applies to near spherical agglomerates. 9 of 10 views shall be Category 1 or 2. No more than 1 view from Category 3.
- (2) Standard test methods will be updated to reflect the most current industry standards.

TABLE II.7.6
Technical Specifications
30-mil Reinforced Polyester Geomembrane

| PHYSICAL PROPERTIES | | | | |
|----------------------------|------------------|--------------------|--------------|--|
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD¹ |
| Thickness | Minimum Average | mils | 30 | ASTM D751 (Optical Method) |
| Weight | Minimum | oz/yd ² | 30 ± 2 | ASTM D751 |
| Break Strength | Minimum | lb | 550 | ASTM D751 Grab Test Method Procedure A |
| Break Elongation | Minimum | % | 20 | ASTM D751 |
| Tear Strength | Minimum | lb | 40 | ASTM D751 |
| Puncture Resistance | Minimum | lb | 275 | ASTM D4833 |
| Hydrostatic Resistance | Minimum | psi | 800 | ASTM D751, Procedure A |
| Bursting Strength | Minimum | lb | 750 | ASTM D751, Ball Tip |
| SEAM PROPERTIES | | | | |
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD¹ |
| Bonded Seam Strength | Minimum | lb | 575 | ASTM D751 Grab Test Method Procedure A |
| Peel Adhesion | Minimum | lb/2 in | 40 | ASTM D413 |

Notes:

(1) *Standard test methods will be updated to reflect the most current industry standards.*

7.3 Delivery, Storage and Handling

1. The geomembrane rolls shall be packaged and shipped by appropriate means to prevent damage of the geomembrane rolls. Off-loading and storage of the geomembrane is the responsibility of the Installer. The Installer shall be responsible for replacing any damaged or unacceptable material at no cost to the Owner.
2. No off-loading shall be performed unless the Site CQA Manager is present. Damage during off-loading shall be documented by the Site CQA Manager. Damaged rolls must be separated from the undamaged rolls until the proper disposition of that material has been determined collectively by the installer and Site CQA Manager.
3. The geomembrane rolls shall be stored so as to be protected from puncture, dirt, grease, water, moisture, mud, mechanical abrasions and excessive heat that may damage the geomembrane material. The rolls shall be stored on a prepared surface (not wooden pallets) and shall not be stacked more than two rolls high.

7.4 Guarantee

1. The Contractor shall guarantee the HDPE and reinforced polyester geomembrane against defects in installation and workmanship for the period of two years commencing with the date of final acceptance by the Owner. The guarantee shall include the services of qualified service technicians and materials required for the repairs at no expense to the Owner.

7.5 Quality Assurance

1. In addition to manufacturer and installer requirements for qualifications and certification specified in submittals, the Quality Assurance consists of conformance testing of the material delivered to the site and field quality control during installation.
2. Conformance testing requirements are listed in this CQA Plan. The purpose of conformance testing is to assure that the supplied material conforms to the specifications and to the manufacturer's quality control certificates.
3. Field quality control requirements are specified in this CQA Plan. The purpose of field quality control procedures is to assure that the geomembrane has been installed in accordance with the specifications and manufacturer's recommendations.
4. Quality control forms for geomembrane installation documentation are used for field installation documentation. Sample project forms are listed on **Table II.7.7**.

TABLE II.7.7
FML Project CQA Forms

| <u>Form No.</u> | <u>Title</u> |
|------------------------|---|
| 1. | Liner Quality Control Project Specifications (Attachment II.7.A) |
| 2. | Approval/Authorization to Proceed Form (Attachment II.7.B) |
| 3. | Daily Summary Report (Attachment II.7.C) |
| 4. | FML Inventory Control Log (Attachment II.7.F) |
| 5. | FML Deployment Log (Attachment II.7.K) |
| 6. | FML Trial Seaming Test Log (Attachment II.7.L) |
| 7. | FML Seaming Log (Attachment II.7.M) |
| 8. | FML Seam Pressure Test Log (Attachment II.7.N) |
| 9. | FML Destructive Field Test Record (Attachment II.7.O) |
| 10. | FML Seam Vacuum Test/Repair Log (Attachment II.7.P) |

Photo-documentation will be also used to record the cell construction. Select photographs shall include date, time, location, and Site CQA Manager; and shall be included in the Liner Certification Report submitted to OCD.

7.6 Geomembrane Placement

1. Weather Conditions
Geomembrane placement shall not proceed at an ambient temperature below 40 degrees F or above 104 degrees F unless otherwise authorized, in writing, by the Site CQA Manager. Geomembrane placement shall not be performed during precipitation, excessive moisture, in an area of ponded water, or excessive winds. Observation of temperature, humidity, precipitation, and wind shall be noted on CQA forms to ensure that weather conditions are acceptable prior to geomembrane placement.
2. Method of Placement
 - a) No more material than can be seamed on that same day shall be deployed.
 - b) Each panel of the geomembrane shall be rolled out and installed in accordance with the approved construction drawings. The layout shall be designed to keep field joining of the HDPE geomembrane to a minimum and consistent with proper methods of HDPE geomembrane installation, seaming, etc.
 - c) Geomembrane rolls shall be placed using proper spreader and rolling bars with cloth slings.
 - d) The Site CQA Manager shall inspect each panel, after placement and prior to seaming, for damage and/or defects. Defective or damaged panels shall be replaced or repaired, as approved by the Site CQA Manager.
 - e) The installer shall avoid dragging the geomembrane sheets on rough soil subgrades.
 - f) Geomembranes shall be anchored as shown on the construction drawings and consistent with manufacturer's recommendations.
 - g) Personnel working on the geomembrane shall not smoke, wear damaging shoes or involve themselves in any activity that may damage the geomembrane.

- h) Vehicular traffic across the geomembrane shall not be allowed on the liner material.
 - i) Damage shall be recorded and located on the as-built drawings.
 - j) When tying into existing geomembrane, final excavation to previously installed liner segments shall be performed by hand to prevent damage. Damaged sections of previously installed liner at the boundary zone shall be removed and replaced. New liner segments shall be seamed only to competent segments of previously installed liner as approved by the Site CQA Manager.
 - k) The geomembrane shall be kept free of debris, unnecessary tools and materials. In general, the geomembrane area shall remain neat in appearance.
 - l) The method used to unroll the panels shall neither score, scratch or crimp the geomembrane, nor damage the underlying liner system components or subgrade.
 - m) Adequate loading (e.g., sand bags or similar items that will not damage the geomembrane) shall be placed to prevent uplift by wind. In cases of high wind, continuous loading is recommended along edges of panels to minimize wind flow under the panels.
 - n) Direct contact with the geomembrane shall be minimized; i.e., the geomembrane under traffic areas shall be protected by geotextile, extra geomembrane, or other suitable materials.
 - o) Sufficient slack shall be placed in the geomembrane to compensate for the coldest temperatures envisioned so that no tensile stresses are generated in the geomembrane or in its seams either during installation or subsequently after the geomembrane is covered.
 - p) The geomembrane shall have adequate slack such that it does not lift up off of the subgrade or substrate material at any location within the facility, i.e., no "trampolining" of the geomembrane shall be allowed to occur at any time.
 - q) The geomembrane shall not have excessive slack to the point where creases fold over upon themselves either during placement and seaming, or when the protective soil or drainage materials are placed on the geomembrane.
 - r) Permanent (fold over type) creases in the covered geomembrane shall not be permitted. Creases shall be repaired in accordance with this CQA Plan and manufacturer's recommendations.
 - s) The amount of slack to be added to the deployed and seamed geomembrane should be carefully considered and calculated, taking into account the type of geomembrane and the geomembrane's temperature during installation versus its final temperature in the completed facility.
3. Field Seams
- a) Individual panels of geomembrane shall be laid out and overlapped by a minimum of 4 inches (or three inches for extrusion fillet welding) but no more than 6 inches prior to welding. The area to be welded shall be cleaned and prepared in accordance with the quality control welding procedures.
 - b) If the overlap is too wide to contain the hot wedge welding machine, "float" the liner into better position by lifting it high enough to draw air beneath it, guiding it upon the air to an improved position. Avoid dragging the liner, particularly across rough soil subgrades.

- c) If overlap between the placed liners is excessive, the excess must be trimmed away. This should be done by trimming the lower sheet. If this is not possible and the upper sheet must be trimmed, use a knife with a shielded or hook blade.
- d) Cutting and preparation of odd-shaped sections or small fitted pieces should be completed at least 50 feet ahead of the seaming operation, so that seaming may be conducted with the fewest interruptions.
- e) Liner panel overlaps shall be shingled so the upper panel is hydraulically upgradient of lower panel.
- f) Sheets which are overlapped and ready for seaming must be clean. If dirty, they must be wiped clean with dry rags.
- g) The seam area must be completely free of moisture before the overlapping sheets can be properly seamed. Dry rags should be used to wipe any such moisture up from the seam surface. Air blowers may also be used.
- h) Seaming is not to be performed when the soil surface beneath the liners is saturated, because the hot seaming apparatus will draw moisture into the ongoing seam. Seaming activity on frozen soil is unacceptable for the same reason.
- i) Double track hot wedge fusion welder shall be used for straight welds.
- j) Extrusion welder shall be used for cross seam tees, patches and repairs and penetration boots.
- k) The welding equipment used shall be capable of continuously monitoring and controlling the temperatures in the zone of contact where the machine is actually fusing the geomembrane material so as to ensure that changes in environmental conditions will not affect the integrity of the weld.
- l) No “fish mouths” will be allowed within the seam area. Where “fish mouths” occur, the material shall be cut, overlapped and a patch fusion weld shall be applied. Welds upon completion of the work shall be tightly bonded. Any geomembrane area showing damage due to excessive scuffing, puncture, or distress from any cause shall be replaced or repaired with an additional piece of geomembrane. The number of patches per 100 foot length shall not exceed five. If more than five patches per 100 foot length are necessary, then the entire 100 foot length of seam shall be removed. Further welding will cease at this time and the Site CQA Manager shall be notified.
- m) Seams shall have a seam number that corresponds with the panel layout numbers. The numbering system shall be used in the development of the as-built drawings. Seam numbers shall be derived from the combination of the two panel numbers that are to be welded together.
- n) Fusion welded “T” seams (i.e., the result of the geomembrane panels placed perpendicular to each other) shall be double welded where possible. Extrusion welding shall be used for the second weld.
- o) Extrudate shall be free of debris, dry and protected from damage.
- p) If an extrusion welder is stopped for longer than one minute, it shall be purged to remove heat-degraded extrudate. Purged extrudate shall be placed on a sacrificial sheet and disposed of.
- q) No horizontal seams shall be constructed on slopes greater than or equal to 5H:1V and no horizontal seams shall be located within 5 feet of the sideslope toe.

- r) Vertical panels placed on sloped surfaces shall extend 10 feet inward from the toe of slope and 3 feet from the edge of the trench.
- s) In the anchor trench, seams shall extend a minimum 12 inches.
- t) Factory seams, field seams and repair welds shall meet seam strength requirements specified in **Tables II.7.4, II.7.5, and II.7.6.**
- u) For geomembrane installation in geometrically unique areas, the number of field seams shall be minimized.
- v) No solvent or adhesive may be used unless the product is approved by the Site CQA Officer.

7.7 Hot Wedge Fusion Welding

The objective of hot wedge seaming is to heat two facing liner surfaces to their melting point before forcing them together and creating a permanent bond. The wedge is situated between the overlap of the two liners; it reduces the surface tension of the viscous polymer sheets and acts as a scraper and mixer, so that the nip rollers can pressure the two liners together. The result is that the two facing surfaces are bonded into one continuous molecular structure. Types of thermoplastic liners can be seamed by the hot wedge method, but temperature settings will vary according to their specific polymer components:

TABLE II.7.8
Typical Wedge Temperature Ranges for
Hot Wedge Seaming of Thermoplastic Liners

| LINER TYPE | FAHRENHEIT (°F) | CELSIUS (°C) |
|----------------------------------|------------------------|---------------------|
| HDPE | | |
| Minimum ¹ Temperature | 600 | 320 |
| Maximum ² Temperature | 750 | 400 |

¹ For dry, warm weather seaming conditions

² For damp, cold weather seaming conditions

- a) The hot wedge system should be properly positioned for completing the desired single or dual (split) seam.
- b) Ambient variables such as temperature, cloud cover, and wind speed may make it necessary to vary the temperatures used successfully in a variety of ambient conditions, so that the hot wedge can be more accurately adjusted if new conditions are met, or if personnel changes are necessary.
- c) The drive motor should be off when positioning the welding machine to seam. Place the machine where the sheets overlap. Guide the overlapped material between the idlers and the wedge, and into the drive/nip rollers. When continuing a weld that has been abandoned mid-seam, the liners must be spread where the seam leaves off and loaded into the respective sides of the machine. Raise the machine a few inches, load the bottom sheet first, and then load the top sheet. When the nip rollers engage and the wedge is in position, turn on the drive motor. Immediately engage the sheets when they are between

the nip rollers to prevent an imminent melt-through. Move the hot wedge into position and lock it.

- d) The Operator must constantly monitor the temperature controls, as well as the completed seam passing out of the machine. Occasional adjustments in temperature or speed will be necessary to maintain a consistent weld. Visual inspection and constant hand testing by the peel method (or other) is also recommended.
- e) On some soils, the device tends to "bulldoze" into the ground as it travels, causing soil to enter the weld. A seam with soil trapped in its weld is unacceptable. To keep this from happening, the operator should lift the front of the machine slightly. Alternatively, a moveable base for the machine to travel on can be used. Scrap strips of geotextile or geomembrane have proven to be effective materials upon which the welder can maintain traction. It may also be necessary to change the size of the rollers in loose soils.
- f) A small amount of "squeeze-out" or "flashing" is a reliable indication that proper temperatures have been achieved. The melted polymer will laterally extrude, or squeeze-out of the seam zone in properly welded seams, but not to excess. An excessive amount of extruded hot melt indicates that excessive heat or pressure, or both, was applied. Reduce the temperature and/or pressure to correct the situation.
- g) The hot wedge device has just a few adjustable parts, but it is critical that they be checked after a day of seaming. The machine should be cleaned daily.

7.8 Extrusion Welding

- a) The upper sheet's leading edge must be ground to a 45° bevel. It is imperative that the sheet be lifted up and away from the lower sheet during the beveling so that no deep gouges are cut in the lower sheet. Grinding should therefore be done before tack welding.
- b) After beveling, the upper sheet is lowered and laid flat against the lower sheet. The horizontal surface grinding across the interface of both sheets is completed. Surface sheen in the area to be seamed must be removed. Material dust generated by grinding the liner sheets must be wiped or blown away from the seaming zone.
- c) Grinding marks should run perpendicular to the seam. Though this process is slower than grinding parallel to the seam, it does not create the deep parallel grooves that significantly decrease the thickness of the parent material that can lead to seam failure. Parallel grinding marks can also initiate stress cracking.
- d) Grind marks should never be deeper than 10% of the sheet thickness. Optimally, they should be about 5% of the sheet thickness. The only purpose of grinding is the removal of oxide layers and dirt from the liner surfaces, and the roughening of their interface for extrudate.
- e) Grinding marks should not extend beyond 1/4 inch of either side of the extrudate after its placement. For example, if the final extrudate bead width is 1-1/2 inches, the width of the grinding trail should not exceed 2 inches.
- f) Seaming must take place no more than 10 minutes after grinding, so that surface oxide layers do not reappear where the extrudate must be placed.
- g) The hand grinder should never be left running when it is not in use. If it makes contact with the liner while running it will cause serious damage.
- h) A hot air gun may be used to "tack" the two sheets together, ahead of the extrusion welder. The hot air gun prepares the seam for the extrusion welder by heating the ground

surface and by creating a light bond between the two sheets, securing their position. The hot air gun is not meant to create a primary seam. No heat distortion should be evident on the surface of the upper sheet.

- i) The extrusion welder's barrel shall be purged of heat-degraded extrudate before starting a seam. This must be done every time the extruder is restarted after two or more minutes of inactivity. The purged extrude shall not be discharged onto the surface of previously placed liner, or onto prepared subgrade, where it would eventually form a hard lump under the liner and cause stress concentrations and possibly premature failure.
- j) Molten, highly viscous extrudate is deposited along the overlapped seam. The center of the extrudate pass directly along the edge of the upper liner, at sufficient width to completely cover the edge and most of the outlying grind marks, at least to within 1/4 inch of their extremity.
- k) The extrudate should be approximately twice the specified sheet thickness, measured from the top of the bottom sheet to the top or "crown" of the extrudate. Excessive "squeeze out" is acceptable, if it is equal on both sides and will not interfere with subsequent vacuum box testing. If however, the extrudate can be pulled by its squeeze-out off the seam, the extrudate is unacceptable. The presence of squeeze-out may indicate that the extrusion die was not riding directly against the liner, that the extrudate temperature was improper for adequate flow, or that the seaming rate was too slow.
- l) Where possible, inspect the underside of the lower for heat distortion. This can be done at the end of seams, and wherever samples are cut out of the seam. A slight amount of thermal "puckering" on relatively thin liners (less than 50 mil) is acceptable. It indicates that heat penetrated entirely through the sheet. However, if the underside is greatly distorted, either lower the temperature or increase the rate of seaming.
- m) If the seaming process must be interrupted at mid-seam, the extrudate should trail off gradually, not terminate in a large mass of solidified extrudate. Where such welds are abandoned long enough to cool, they must be ground prior to continuing with new extrudate over the remainder of the seam. Grind where the extrudate trail-off begins. This restart procedure must be followed for patches, pipes, fittings, appurtenances and "T" and "Y" shaped items.
- n) The extrudate bead should be visually inspected. Look to see that its alignment is straight, its height is appropriate, and its surface texture is uniform. No bubbles or pock marks should appear in the extrudate, which indicate the undesirable presence of air, water or debris within the extrudate rod or palletized polymer.
- o) Grind marks should not be visible more than 1/4 inch beyond the extrudate. These should be very light and not contain heavy gouges. As stated previously, grinding is considered excessive when it is deeper than 10% of the liner thickness. It is unacceptable to apply additional extrudate over the original extrusion fillet seam in an area of excessive grinding. A cap strip shall be placed over the entire portion of the seam where excessive grinding is seen.

7.9 Field Quality Control

1. Start-up Testing

A trial weld, 10 feet long for hot wedge welding and 3 feet long for extrusion welding, from each welder/welding machine shall be run upon the beginning of each shift, every four hours thereafter and at the discretion of the Site CQA Manager, under the same conditions that exist for the geomembrane welding. The trial weld shall be marked with date, ambient temperature, welder's name, and welding machine number. A tensiometer provided by the Installer shall be required to be on-site before and during geomembrane installation for the purpose of testing samples. Specimens of weld 1 inch wide shall be cut from the trial weld and tested on site for shear and peel strength in accordance with **Tables II.7.4, II.7.5, and II.7.6**. No welder may start work until the trial weld has been approved by the Site CQA Manager.

2. Nondestructive Seam Testing

a) The installer shall perform nondestructive tests on field seams over their full length. The purpose of this test is to assure continuity and integrity of the seams. Vacuum and air pressure tests shall be used for nondestructive testing. The vacuum test shall be used for extrusion welds and single-track hot wedge welds. The air pressure test shall be used for double track hot wedge welds.

b) Vacuum Testing

Equipment for testing single wedge fusion seams and extrusion seams shall be comprised of the following:

- (1) A vacuum box assembly consisting of a rigid housing, a transparent viewing window, a soft rubber gasket attached to the bottom, porthole or valve assembly and a vacuum gauge.
- (2) A vacuum tank and pump assembly equipped with a pressure controller and pipe connections.
- (3) A rubber pressure/vacuum hose with fittings and connections.
- (4) A plastic bucket and wide paintbrush.
- (5) A soapy solution.

The following procedures shall be followed by the installer:

- (1) Excess sheet overlap shall be trimmed away.
- (2) Clean the window, gasket surfaces and check for leaks.
- (3) Energize the vacuum pump and reduce the tank pressure to approximately 5 psi.
- (4) Wet a strip of geomembrane approximately 12 inch by 48 inch (length of box) with the soapy solution.
- (5) Place the box over the wetted area and compress.
- (6) Close the bleed valve and open the vacuum valve.
- (7) Ensure that a leak-tight seal is created.
- (8) For a minimum period of ten seconds, examine the geomembrane through the viewing window for the presence of soap bubbles.
- (9) If no bubbles appear after ten seconds, close the vacuum valve and open the bleed valve, move the box over the next adjoining area with a minimum of 3 inch overlap and repeat the process.

- (10) Areas where soap bubbles appear shall be marked and repaired in accordance with the Repair Procedures contained in this CQA Plan.

If the seam cannot be tested prior to final installation, the seaming operations shall be observed by the Site CQA Manager for uniformity and completeness.

3. Air Pressure Testing (for double track fusion seams only)

The following procedures are applicable to those processes which produce a double seam with an enclosed space. Equipment for testing double fusion seams shall be comprised of the following:

- (1) An air pump equipped with pressure gauge capable of generating and sustaining a pressure of 35 psi and mounted on a cushion to protect the geomembrane.
- (2) A manometer equipped with a sharp hollow needle, or other approved pressure feed device.

The following procedures shall be followed by the installer:

- (1) Seal one end of the seam to be tested.
- (2) Insert needle or other approved pressure feed device through the sealed end of the channel created by the double wedge fusion weld.
- (3) Energize the air pump to verify the unobstructed passage of air through the channel.
- (4) Seal the other end of the channel.
- (5) Energize the air pump to a pressure of 35 psi, close valve, and sustain pressure for approximately 5 minutes.
- (6) If loss of pressure exceeds 1% \pm , or pressure does not stabilize, locate faulty area, repair and retest.
- (7) Remove needle or other approved pressure feed device and seal.

7.10 Destructive Seam Testing

The purpose of the destructive testing is to evaluate seam strength properties. An average minimum of one test sample shall be obtained per 500 feet of performed seam length. The location of samples shall be determined by the Site CQA Manager. Selection of such locations may be prompted by suspicion of overheating, contamination, or other potential cause that may adversely impact the welds. This may result in more than one sample per 500 feet of seam length. Sampling shall be performed by the installer. Testing of field samples shall be performed by the installer in the presence of the Site CQA Manager as described below.

1. Sampling Procedures

- a) Samples shall be cut by the installer at locations chosen by the Site CQA Manager as the seaming progresses.
- b) The seams shall not be covered by another material before they have been tested and accepted by the Site CQA Manager.
- c) Upon obtaining each sample, assign a number to the sample and mark it accordingly.
- d) Record sample location on layout drawing.
- e) Record purpose of the sample, statistical routine or suspicious weld area.
- f) Record date, time, location, roll, seam number, master seamer, welding apparatus, and ambient temperature.

- g) Holes in the geomembrane resulting from destructive seam testing shall be immediately repaired in accordance with the Repair Procedures contained in this CQA Manual.
- 2. Size and Disposition of Samples
 - a) The samples shall be 12 inches wide by 36 inches long with the seam centered lengthwise. The sample shall be cut into three pieces of equal length and distributed as follows:
 - (1) One portion to the Installer for field testing; 12 inch by 12 inch.
 - (2) One portion for the independent geosynthetic laboratory quality assurance testing; 12 inch by 12 inch.
 - (3) One portion to the Landfill Manager for archive storage in the Site Operating Record; 12 inch by 12 inch.
 - b) The portion of the seam samples for geosynthetic laboratory quality assurance testing will be packed and shipped to an independent lab for testing by the Installer.
- 3. Field Testing
 - a) The following shall be performed by the Installer in the presence of the Site CQA Manager for samples designated for field sampling.
 - (1) The Installer shall cut ten 1-inch wide replicate specimens from the sample to be tested for shear and peel strength, in accordance with the criteria set in **Tables II.7.4, II.7.5, and II.7.6.**
 - (2) Any specimen that fails through the weld or by fusion at the weld sheet interface is a non-FTB (Film Tearing Bond) break and shall be considered a failure.
 - (3) The Installer shall test five specimens for shear seam strength and five for peel strength. Four out of the five replicate test specimens shall pass for the seam to be acceptable. A specimen must pass both Sections 1 and 2 above to be acceptable.
- 4. Quality Assurance Laboratory Test
 - a) The Installer shall package and ship destructive test samples designated for laboratory testing to the independent Quality Assurance Laboratory. The laboratory must be approved by the Site CQA Officer.
 - b) Laboratory tests shall include shear and peel strength tests. The minimum acceptable values obtained in these tests shall be in accordance with **Tables II.7.4, II.7.5, and II.7.6.**
 - c) At least five specimens shall be tested each for shear and peel strength. A passing test shall meet the minimum required values in at least four of the five specimens tested for each method.
 - d) Any specimen that fails through the weld or by fusion at the weld sheet interface is a non-FTB (Film Tearing Bond) break and shall be considered a failure.
 - e) The Independent Laboratory shall provide verbal test results to the Site CQA Manager no more than 24-hours after they receive the samples. The Site CQA Manager shall review the laboratory results as soon as they become available.
- 5. Procedures for Destructive Test Failure
 - a) The following procedures shall apply whenever a sample fails a destructive test, whether that test is conducted in the field or by the laboratory. The Installer has two options:
 - (1) The installer can repair the seam between any two passing test locations.

- (2) The installer can retrace the welding path to an intermediate location 10 feet (on both sides) from the location of the failed test and take a sample for an additional field test. If these tests pass, then the seam shall be repaired. If the test fails, then the process is repeated to establish the zone in which the seam should be repaired. This process may only be repeated twice. After the third failed test, the entire seam must be repaired.
- b) Acceptable repaired seams shall be bound by two locations from which sample passing destructive tests have been taken. In cases where repaired seam exceeds 150 feet, a sample taken from the zone in which the seam has been repaired must pass destructive testing. Repairs shall be made in accordance with this CQA Plan.
- c) The Installer shall document actions taken in conjunction with destructive test failures.

7.11 Repair Procedures

1. Any portion of the geomembrane exhibiting signs of defect, failing a destructive or a nondestructive test, shall be repaired. Several procedures exist for the repair of these areas. The final decision as to the appropriate repair procedure shall be made by the Site CQA Manager.
2. The repair procedures available include:
 - a. Defective seams shall be restarted/reseamed as described in this CQA Plan.
 - b. Small holes shall be repaired by extrusion cap welding. If the hole is larger than 1/4 inch, it shall be patched with a piece of material extending six inches out from the damaged area.
 - c. Tears shall be repaired by patching. The sharp end of a tear on a slope, or in an area of particular stress, must be rounded prior to patching.
 - d. Blisters, large holes, undispersed raw materials, and contamination by foreign matter shall be repaired by patches.
 - e. HDPE surfaces to be patched shall be abraded and cleaned no more than one hour prior to the repair. No more than 10% of the thickness shall be removed.
 - f. Patches shall be round or oval in shape, made of the same geomembrane, and extend to a minimum of six inches beyond the edge of defects. Patches shall be of the same compound and thickness as the geomembrane specified. Patches shall have their top edge beveled prior to placement on the geomembrane in accordance with this CQA Plan. Patches shall be applied and the repair made using methods discussed in the CQA Plan.
3. Restart/Reseaming Procedures - Fillet Extrusion Welds

The Fillet Extrusion Welds process shall restart by grinding the existing seam and rewelding a new seam. Welding shall commence where the grinding started and must overlap the previous seam by at least two inches. Reseaming over an existing seam without regrinding shall not be permitted.
4. Restart/Reseaming Procedures - Hot Wedge Welds

Over the length of the seam failure, the Installer shall either cut out the old seam, reposition the panel and reseam, or add a cap strip, as required by the Site CQA Manager.
5. For any repair method, the following provisions shall be satisfied:

- a) Surfaces of the geomembrane which are to be repaired using extrusion methods shall be abraded no more than one hour prior to the repair.
- b) Surfaces shall be clean and dry at the time of the repair.
6. Repair Verification
 - a) Each repair shall be numbered and logged by the installer and the Site CQA Manager. Each repair shall be nondestructively tested using the methods described in Section 5.10, Subsection 2 "Non-Destructive Testing" as appropriate. Repairs which pass the nondestructive test shall be taken as an indication of an adequate repair. Repairs more than 150 feet long may be of sufficient length to require destructive test sampling, at the discretion of the Site CQA Manager. Failed tests indicate that the repair shall be redone and retested until passing test results are achieved. The Site CQA Manager shall observe nondestructive testing of repairs. The installer shall record the number of each repair, date and test outcome.
7. Disposal of Waste Material

Upon completion of installation, the Installer shall dispose of trash, waste material, etc., and shall leave the premises in a neat and acceptable condition.

7.12 Geomembrane Acceptance

The Installer shall retain ownership and responsibility for the geomembrane until acceptance by the Owner. The geomembrane liner shall be accepted by the Owner when the following conditions are met:

1. Installation is finished.
2. Verification in the form of a certificate of acceptance of the adequacy of field seams and repairs, including associated testing, is complete.
3. Certification by the Site CQA Manager that the geomembrane was installed in accordance with the Construction Drawings, this CQA Plan and manufacturers recommendations.
4. Certification, including "as built" drawing(s) and installation documentation, is provided by the Installer to the Site CQA Manager.

8.0 GEONET

8.1. Geonet Properties

Geonet is proposed as the leak detection layer for the evaporation ponds and landfill.

1. The geonet shall be manufactured of new, prime first-quality materials designed and manufactured specifically for the purpose of planar drainage of liquid and chemically resistant to leachate.
2. Geonets are unitized sets of parallel ribs positioned in layers to form a three-dimensional structure such that liquid can be transmitted within their open spaces.
3. The geonet material shall meet the minimum properties listed in **Table II.7.9.**

8.2 Manufacturer Quality Control Documentation

Prior to installation commencement of any geonet material, the Contractor shall provide to the Site CQA Manager the following information certified by the manufacturer for the delivered geomembrane.

1. Origin, identification and production of the resin (supplier's name, brand name and production plant).
2. Copies of quality control certificates issued by the resin supplier.
3. Manufacturer's certification verifying that the quality of the resin used to manufacture the geonet meets the resin specifications fingerprint properties shown in **Table II.7.9**.
4. Each roll delivered to the project site shall have the following identification information:
 - Manufacturer's name
 - Product identification
 - Thickness
 - Roll number
 - Roll dimensions
5. Quality control certificates, signed by the manufacturer's quality assurance manager. Each certificate shall have roll identification number, sampling procedures, frequency, and test results. At a minimum, the following test results shall be provided in accordance with applicable test requirements specified in **Tables II.7.9**.

TABLE II.7.9
Technical Specifications
HDPE Geonet

| PHYSICAL PROPERTIES | | | | |
|----------------------------|------------------|---------------------|--------------------|--------------------|
| PROPERTY | QUALIFIER | UNIT | VALUE | TEST METHOD |
| Thickness | Minimum | mils | 200 | ASTM D1777 |
| Density | Minimum | g/cc | 0.94 | ASTM D1505 |
| Melt Index | Range | g/10 min | 0.1 - 1.1 | ASTM D1238 |
| Carbon Black Content | Range | % | 2.0 - 3.0 | ASTM D1603 |
| Tensile Strength | Minimum | lb/in | 42 | ASTM D1682 |
| Mass Per Unit Area | Minimum | lb/ft ² | 0.16 | ASTM D3776 |
| Transmissivity (loaded) | Minimum | m ² /sec | 1x10 ⁻³ | ASTM D4716 |

Notes:

1. Values representative of GSE 200-mil geonet or equivalent.
2. Standard test methods will be updated to reflect the most current industry standards.

8.3 Conformance Testing

1. Conformance testing shall be performed by an independent Quality Assurance Laboratory at a minimum of 1 per 100,000 ft². The Site CQA Manager or Installer shall obtain the samples from the roll, mark the machine direction and identification number. The number of lots and samples will be determined in accordance with ASTM D4354. The following conformance tests shall be conducted at the independent laboratory:
 - Thickness (ASTM D 1777)
 - Density (ASTM D 1505)
 - Wide width tensile properties (ASTM D 1682)
 - Mass per unit area (ASTM D 3776)
 - Carbon black (ASTM D 1603)

- Melt Index (ASTM D 1238)
- 2. These conformance tests shall be performed in accordance with **Tables II.7.9.**
- 3. Conformance test results shall be reviewed by the Site CQA Officer, and lots shall be accepted or rejected prior to the placement of the geomembrane. Test results shall meet, or exceed, the property values listed in **Tables II.7.9.** If the sampling results do not meet property values for any individual lot sample, the lot shall be resampled and retested. This retesting shall be paid for by the manufacturer or installer. If of the test values from the resamples pass the acceptable specification values listed in **Tables II.7.9,** the lot shall be accepted.

8.4 Delivery, Storage and Handling

1. The geonet rolls shall be packaged and shipped by appropriate means to prevent damage of the geonet rolls. Off-loading and storage of the geomembrane is the responsibility of the Installer. The Installer shall be responsible for replacing any damaged or unacceptable material at no cost to the Owner.
2. No off-loading shall be performed unless the Site CQA Manager is present. Damage during off-loading shall be documented by the Site CQA Manager. Damaged rolls must be separated from the undamaged rolls until the proper disposition of that material has been determined collectively by the installer and Site CQA Manager.
3. The geonet rolls shall be stored so as to be protected from puncture, dirt, grease, water, moisture, mud, mechanical abrasions and excessive heat that may damage the geonet material. The rolls shall be stored on a prepared surface (not wooden pallets) and shall be elevated from the ground (a minimum of 3 inches) to protect the geonet from standing water.

8.5 Guarantee

1. The Contractor shall guarantee the HDPE geonet against defects in installation and workmanship for the period of two years commencing with the date of final acceptance by the Owner. The guarantee shall include the services of qualified service technicians and materials required for the repairs at no expense to the Owner.

8.6 Geonet Installation

8.6.1 Geonet Placement

- a. As each roll is moved from the storage area by the Installer, the labels shall be removed by the Installer and submitted to the Site CQA Manager. The rolls of geonet shall be brought to the area to be lined with a front-end loader and support pipes set up such that the geonet roll is fully supported across its length. A spreader bar or similar device shall be used to prevent the lifting chains or slings from damaging the edges.
- b. Care shall be taken to keep the geonet clean and free from debris prior to installation. If the geonet is not clean, it should be washed using a high-pressured hose prior to installation.

- c. Each panel of the geonet shall be rolled out and installed in accordance with the approved shop drawings prepared by the Installer. The layout shall be designed to keep field joining of the geonet to a minimum and consistent with proper methods of geonet installation.
- d. On slopes, the geonet shall be secured and rolled down the slope in such a manner as to continually keep the geonet panel in tension. If necessary, the geonet shall be positioned by hand after being unrolled to minimize wrinkles.
- e. In areas where wind is prevalent, geonet installation should be started at the upwind side of the project and proceed downwind. The leading edge of the geonet shall be secured at times with sandbags or other means sufficient to hold it down during windy conditions.
- f. The geonet shall not be welded to the geomembrane.
- g. The geonet shall only be cut using scissors or other cutting tools approved by the Manufacturer that will not damage the underlying geosynthetics. Care shall be taken not to leave tools on the geonet.
- h. Necessary precautions shall be taken to prevent damage to underlying layers during placement of the geonet.
- i. During placement of geonet, care shall be taken not to entrap dirt or excessive dust within the geonet that could cause clogging of the drainage system and/or stones that could damage the adjacent geomembrane. If dirt or excessive dust is entrapped in the geonet, it should be hosed clean prior to placement of the next material on top of it. In this regard, care shall be taken in handling the sandbags to prevent rupture or damage of the sandbag.
- j. Once the geonet is removed from the storage area by the Installer, it becomes the responsibility of the Installer.

8.6.2 Field Seams

The following requirements shall be met during installation of the geonet:

- a. Adjacent rolls shall be overlapped by a minimum of 4 inches.
- b. Overlaps shall be secured by tying. Tying can be achieved by HDPE fasteners or polymer braids. Tying devices shall be white or yellow for easy inspection. Metallic devices will not be permitted.
- c. Tying shall be every 5 feet along the slope and base, every 6 inches in the anchor trench, and every 6 inches along end-to-end seams on the floor of the landfill and pond.
- d. No horizontal seams shall be allowed on side slopes.
- e. In the corners of the side slopes where overlaps between perpendicular geonet panels are required, an extra layer of geonet shall be unrolled along the slope, on top of the previously installed geonet from top to bottom of the slope.
- f. When more than one layer of geonet is installed, joints shall be staggered.

8.7 Field Quality Control

1. The Installer shall provide the Site CQA Manager with Daily Summary Reports addressing the following:
 - Underlying geomembrane approval for areas anticipated to be covered by geonet
 - The total number and location of panels placed
 - Location of repairs
2. The Field Installation Team Manager and the Site CQA Manager shall provide 100% inspection of the installation to ensure compliance with these technical specifications and Manufacturer recommended procedures.
 - a. The surface of the geonet shall be clean and free of debris at the time of inspection.
 - b. The Field Installation Manager shall record each roll number and lot number as panels are deployed, and a general description of the location of each panel.
 - c. The Field Installation Manager and the Site CQA Manager shall inspect the overlap for each panel.
 - d. The Field Installation Manager and the Site CQA Manager shall inspect the anchoring of the geonet.
 - e. The Field Installation Manager and the Site CQA Manager shall inspect the geonet for any signs of defects or holes. Any areas requiring repair shall be marked and subsequently repaired in accordance with the Repair Procedures listed in these specifications.
 - f. The Field Installation Manager and the Site CQA Manager shall reinspect, verify, and approve repairs and patches.
3. Repair Procedures
 - a. Seams and non-seam areas of the geonet shall be inspected for defects, holes, and any sign of contamination by foreign matter in accordance with the Field Quality Control procedures listed in these specifications.
 - b. Any defects shall be repaired by the Installer by placing a geonet patch with a minimum 12-inch overlap in all directions.
 - c. The patch shall be secured to the original geonet panel by placing HDPE fasteners or polymer braids every 6 inches along the perimeter of the patch.
 - d. For any repair method, surfaces shall be clean and dry at the time of the repair.
 - e. Each completed repair shall be inspected and approved in accordance with the Field Quality Control procedures listed in this CQA Plan.

9.0 PROTECTIVE SOIL LAYER AND SELECT AGGREGATE

9.1 Protective Soil Layer

1. Protective soil layer material shall be comprised of readily available on-site materials free from organic substance and other deleterious matter typically comprised of materials from the unconsolidated formation at the surface of the site (sometimes referred to as “OAG”).
2. Protective soil layer material will be in direct contact with the geocomposite and shall have rounded particle shapes to avoid potential for damage.

9.2 Select Aggregate

Leachate Collection System Bedding Layer and Sumps

1. Washed select aggregate, shall be used for bedding material around the leachate collection pipes. The select aggregate shall be durable, resistant to weathering and shall be free organic material, and fines < 2% by dry weight.
2. The bedding aggregate shall have particle sizes that range from ¾ inch minimum diameter to 2.0 inch maximum diameter in accordance with ASTM C136.
3. The select aggregate shall have particle shapes that will not damage the HDPE liner with the use of a 10 oz/yd² non-woven geotextile cushion layer. The select aggregate shall be approved by the Engineer.

9.3 Conformance Testing

Protective Soil Layer

1. Conformance testing shall be performed on samples from each source of protective soil layer to assure compliance with the specifications. The following tests shall be performed on the samples:
 - a. Permeability (ASTM D2434 or Falling Head) [min. 1 test per 2 acres]
 - b. Total Thickness Test (survey or direct test) [min. 5 per acre]

Select Aggregate.

1. Gradation analysis shall be performed on samples from each source of the select aggregate to assure compliance with the project specifications.

9.4 Delivery, Storage and Handling

If protective soil/select aggregate materials are delivered to the site prior to approval, materials shall be stockpiled on-site in areas as dictated by the Owner to facilitate approval by the Engineer. Provision shall be implemented to minimize surface water or dust impacts on the stockpile. Removal and placement of the materials shall be conducted in a manner to minimize intrusion of soils adjacent to and beneath the stockpile.

9.5 Protective Soil Layer Placement

1. After the completion of installation and acceptance of the liner system and related work activities, placement of the minimum 24 inch thick protective soil layer will be initiated following approval by the Engineer.
2. During the placement of the protective soil layer material, no construction equipment shall be allowed directly on the geocomposite and any damage shall be repaired immediately by the Contractor in accordance with this CQA Plan.
3. Care shall be taken to protect the liner system. Ramps shall be provided at down slopes and in other heavily traveled areas. Heavily traveled areas shall have a minimum of 3 feet of select material above the liner system.
4. Protective soil layer shall not be placed over folds in the geocomposite.

5. Protective soil material shall be placed on the side slopes starting at the toe of the slope and working toward the top of the slope/berm.
6. The protective soil layer should be spread when the geocomposite is taut or stretched evenly over the base of the landfill. The protective soil layer material shall not be spread when the geocomposite is elongated due to higher daytime temperatures and/or exposure to sun.
7. Protective soil layer shall not be placed while the soil is frozen or thawing, or during unfavorable weather conditions.

9.6 Select Aggregate Placement

Leachate Collection System Bedding Layer and Sump Select Aggregate

After geosynthetic placement has been approved, placement of non-woven geotextile in the floor of the leachate collection system trench, leachate collection sump and leak detection sump will ensure protection of the geosynthetics from the overlying select aggregate layer.

A. Leachate Collection System Bedding Layer

1. Placement of a 3 inch bedding layer in the bottom of the trench and on top of the geotextile consisting of select aggregate, 0.75 inch minimum diameter to 2.0 inch maximum diameter (maximum 2% fines by dry weight).
2. Backfilling of the leachate pipe will be allowed only after placement and workmanship have been approved by the Site CQA Manager.
3. Backfilling around the leachate pipe will be with the select aggregate to the depth and width shown on the construction drawings.
4. Haunching of the select aggregate will provide stability to the pipe from the sides and from underneath.
5. Placement of the select aggregate should be in gradual 4 inch to 6 inch lifts and tamped simultaneously with a blunt tamping tool to ensure the material is well consolidated under and around the pipe.
6. Backfilling, with the select aggregate, should be brought up to a height of a minimum of 12 inches above the top of the pipe.

B. Leachate Collection Sump and Leachate Detection Sump Select Aggregate Placement

1. Placement of a 2 foot layer in the sumps and on top of the geotextile consisting of select aggregate, 0.75 inch minimum diameter to 2.0 inch maximum diameter (maximum 2% fines by dry weight).
2. Backfilling of the leachate collection and riser pipes will be allowed only after placement and workmanship have been approved by the Site CQA Manager.
3. Backfill around the leachate collection and riser pipes will be with the select aggregate to the depth and width shown on the construction drawings.
4. Placement of the select aggregate should be in gradual 4 inch to 6 inch lifts and teamped simultaneously with a blunt tamping tool to ensure the aggregate is well consolidated under the sides of the pipes as well as around it.
5. Care shall be taken during backfilling such that damage to the leachate collection and riser pipes is avoided.

9.7 Field Quality Control

- A. The protective soil layer thickness shall be verified by survey on a minimum frequency of 5 survey points per acre.
- B. The protective soil layer thickness may be measured periodically throughout the day during construction to confirm that the thickness of the installed material is in accordance with the Engineering Drawings.
 1. Protective Soil Layer Thickness (i.e., Survey 5/acre, Test Probe, Calibrated cones).

9.8 Protective Soil Layer - Thickness Confirmation Procedure

Due to the effects of wind and stormwater, the protective soil may not maintain a full 24 inch thickness at locations over time. The following procedure (**Table II.7.10**) has proven effective at confirming protective layer thickness at the most important point in time when the protective soil layer is being covered with waste.

TABLE II.7.10
Protective Soil Layer – Supplemental Thickness
Confirmation Procedure

1. Prior to advancing the fill face over new sections of the liner, the protective soil cover in these areas may be tested to confirm a thickness not less than 24 inches.
2. The area that may be tested will include the footprint where the next lift of waste will be placed over the protective cover; plus a buffer zone at least 50 feet ahead of the advancing fill face.
3. Add select protective soil material from the designated stockpile in the area to be tested if additional thickness is required.
4. Perform protective cover depth probe by field survey, with a blunt instrument or construction cones (i.e., no shovels) on a spacing not to exceed 100 feet. The instrument shall have a smooth rounded or flat tip, and it shall be advanced carefully until contact with the geosynthetic surface is confirmed. Care must be taken not to damage the geosynthetic surface.
5. The probes or traffic cones shall be calibrated such that the 24 inch length is visible and prominently marked. Record probe test results (both passing and failing) in the Site Log Book and/or on forms provided specifically for this purpose.
6. In sections where the protective cover is less than 24 inches thick, add additional protective soil to the area and retest. Continue this procedure until test locations meet the 24 inch thickness criterion, and the intervening protective cover layer surface appears level and smooth.
7. Record any retest data results in the Site Log Book and/or on forms provided specifically for that purpose (example included in appendix). The information recorded shall include, at a minimum;

| | |
|------------------------|-------------------------------|
| • Testing Date | • Approximate Probe Locations |
| • Testing Personnel | • Probe Test Results |
| • Probe Identification | • Probe Retest Results |
8. Maintain records regarding the protective soil layer on-site at all times for review by OCD inspectors, and by landfill management and engineering personnel.

10.0 GEOTEXTILE

10.1 Geotextile Properties

1. The 10 oz/yd² non-woven geotextile shall meet the specifications provided in **Table II.7.11**.
2. The minimum roll width shall be 15 feet, and the maximum roll length shall be 300 feet.

10.2 Manufacturer's Quality Control Documentation

Prior to installation commencement of any geonet composite material, the Contractor shall provide to the Site CQA Manager the following information certified by the manufacturer for the delivered geotextile.

1. Each roll delivered to the project site shall have the following identification information:
 - Manufacturer's name
 - Product identification
 - Thickness
 - Roll number
 - Roll dimensions
2. Quality control certificates, signed by the manufacturer's quality assurance manager. Each certificate shall have roll identification number, sampling procedures, frequency, and test results. At a minimum, the following test results shall be provided in accordance with applicable test requirements specified in **Table II.7.11**:
 - Thickness (ASTM D5199)
 - Weight (ASTM D5261)
 - Tensile strength (ASTM D4632)
 - Elongation (ASTM D4632)
 - Puncture strength (ASTM D4833)
 - Mullen burst strength (ASTM D3786)
 - Trapezoidal tear strength (ASTM D4533)
 - Coefficient of permeability (ASTM D4491)
 - Permittivity (ASTM D4491)
 - Flow rate (ASTM D4491)
 - UV resistance (ASTM D4355)
 - Apparent opening size (ASTM D4751)

10.3 Conformance Testing

1. Conformance testing shall be performed by an independent Quality Assurance Laboratory approved by the Engineer at a minimum of one (1) per 100,000 ft². The Site CQA Manager or Installer shall obtain the samples from the roll, mark the machine direction and identification number. The number of lots and samples will be determined in accordance with ASTM D4354. The following conformance tests shall be conducted at the independent laboratory:
 - Weight (ASTM D5261)
 - Tensile strength (ASTM D4632)
 - Puncture strength (ASTM D4833)
 - Mullen burst strength (ASTM D3786)
 - Trapezoidal tear strength (ASTM D4533)
 - Apparent opening size (ASTM D4751)

TABLE II.7.11
Technical Specifications
Non-Woven Geotextile¹

| PHYSICAL PROPERTIES (MARV²) | | | | |
|---|----------------------|--------------------------------------|----------------------|------------------------------------|
| PROPERTY | QUALIFIER | 10 oz/yd² UNIT | VALUE | TEST METHOD⁴ |
| Weight | MARV | 10.0 | oz/yd ² | ASTM D5261 |
| Thickness | MARV | 105 | Mils | ASTM D5199 |
| Tensile Strength | MARV | 270 | Lbs | ASTM D4632 |
| Elongation | MARV | 50 | % | ASTM D4632 |
| Puncture Strength | MARV | 180 | Lbs | ASTM D4833 |
| Mullen Burst Strength | MARV | 520 | psi | ASTM D3786 |
| Tapezoidal Tear Strength | MARV | 105 | lbs | ASTM D4533 |
| Apparent Opening Size (AOS) | Max ARV ³ | 100 | US Sieve | ASTM D4751 |
| Coefficient of Permeability | MARV | 0.30 | cm/sec | ASTM D4491 |
| Permittivity | MARV | 1.20 | sec ⁻¹ | ASTM D4491 |
| Flow Rate | MARV | 85 | gpm/ft ² | ASTM D4491 |
| UV Resistance | MARV | 70 | % Retained @ 500 hrs | ASTM D4355 |
| Roll Width (Nominal) | Measured | 15 | feet | n/a |
| Roll Length (Nominal) | Measured | 300 | feet | n/a |

Notes:

1. Values reported represent Propex Geosynthetics (formerly Synthetic Industries) 1071 Nonwoven.
2. Values shown are in weaker principal direction. Minimum average roll values (MARV) are calculated as the typical minus two standard deviations. Statistically, this yields a 97.7% degree of confidence that any samples from quality assurance testing will be in compliance with the target values.
3. Maximum Average Roll Values (Max ARV) represent typical plus two standard deviations.
4. Geotextiles with greater or equivalent properties may be used for select application.
5. Standard test methods will be updated to reflect the most current industry standards.

2. These conformance tests shall be performed in accordance with **Table II.7.11**.
3. Conformance test results shall be reviewed by the Site CQA Officer, and lots shall be accepted or rejected prior to the placement of the geotextile. Test results shall meet, or exceed, the property values listed in **Tables II.7.11**. If the sampling results do not meet property values for any individual lot sample, the lot shall be resampled and retested. This retesting shall be paid for by the manufacturer or installer. If the test values from the resamples pass the acceptable specification values listed in **Table II.7.11**, the lot shall be accepted.

10.4 Installation

1. Leachate Trench/Sump Preparation
 - a. Before the geotextile is placed into position in the leachate collection pipe trench, leachate collection sumps, and leak detection sumps, the following procedures will be completed.
 - (1) The subgrade at the bottom and sides of the trench and sumps shall be carefully prepared in accordance with this CQA Plan.
 - (2) Underlying geosynthetics have been installed in accordance with this CQA Plan.
2. Geotextile Installation
 - a. After geosynthetic placement has been approved by the Site CQA Manager, the Geotextile Installer shall place the non-woven geotextile in the bottom of the trench, leachate collection and leachate detection sumps to ensure protection of the underlying geosynthetics from the overlying select aggregate layer.
 - (1) Exposure of the geotextiles to the elements between lay down and cover shall be a maximum of 14 days.
 - (2) The 10 oz/yd² non-woven geotextile shall be placed atop the underlying geosynthetics in the trenches, leak detection sump and leachate collection sump. The geotextile shall be placed such that the centerline of the geotextile lines up with the centerline of the trench. The geotextile shall be joined by overlapping and sewing. Overlapped seams shall have a minimum overlap of 6 inches.
 - (3) The Installer shall take care not to damage the underlying geosynthetic materials. The Installer is responsible for any damage to the geotextile and underlying geosynthetics caused during geotextile installation.
3. Field Quality Control
 - a. The Site CQA Manager shall inspect the installation for proper placement, sufficient overlap and damaged material. Damaged areas will be repaired in accordance with the Repair Procedures of this CQA Plan.
4. Repair Procedures
 - a. A geotextile patch shall be placed over the damaged area and extend three feet beyond the perimeter of the tear or damage.
 - b. The Site CQA Manager shall verify repairs.
5. Select Aggregate Installation
 - a. Placement of a 3 inch bedding layer in the bottom of the leachate collection pipe trench and on top of the geotextile will be performed by the Contractor.

- b. Placement of the 2 feet of select aggregate in the leachate collection and leak detection sumps shall be performed by the Contractor.
- 6. Leachate Pipe Installation
 - a. Installation of the slotted or perforated Sch 80 PVC or SDR 11 HDPE leachate collection pipe onto the bedding layer will be performed in accordance with the Leachate Pipe Specifications.
 - b. Installation of the Sch 80 PVC or SDR 11 HDPE sump riser pipes will be performed in accordance with the Geopipe Specifications.
- 7. Select Aggregate Backfill
 - a. Backfill of completed sections of the leachate trench shall be completed only after placement and workmanship have been approved by the Site CQA Manager and the top of leachate pipe has been surveyed to verify grade.
 - b. Backfill of the leachate collection and leak detection sumps shall be completed only after placement and workmanship of the riser pipes has been approved by the Site CQA Manager.

11.0 GEOPIPE

11.1 General

The design of the evaporation ponds and landfill cells employ a leak detection system with sumps atop of the secondary liner that are monitored with piping to allow for the removal of liquids that may collect in the detection sump.

The landfill design employs a leachate collection system atop the primary composite liner that includes leachate collection piping and leachate extraction piping. The leachate collection system is comprised of slotted or perforated geopipes which collect leachate seepage through the drainage layer directing it to the permanent or temporary leachate collection sumps where leachate extraction piping is installed. These geopipes are placed within select aggregate and wrapped with a non-woven geotextile material and covered by the granular drainage layer. At the end of each slotted or perforated permanent leachate collection geopipe, a solid geopipe is attached which rises up along the landfill sideslope to allow cleanout of the pipe. The sump extraction geopipes rise along the landfill and pond sideslope to allow extraction of liquid from the leachate collection and leak detection sumps. Leachate collection and leak detection piping design is shown on Engineering Drawings.

11.2 HDPE Geopipe Material Properties

- 1. High Density Polyethylene (HDPE) Pipe utilized for the leachate collection pipe and leachate extraction pipe will be manufactured in accordance with ASTM D714 and have the following physical characteristics:
 - a) Perforated 6-inch diameter HDPE Driscopipe as manufactured by Phillips 66, or approved equal, with a standard dimension ratio (SDR) of 11 as shown on the Engineering Drawings.

- b) Solid wall 12-inch diameter HDPE Driscopipe as manufactured by Phillips 66, or approved equal, with a standard dimension ratio (SDR) of 11 as shown on the Engineering Drawings.
 - c) Solid wall 4-inch diameter HDPE Discopipe as manufactured by Phillips 66, or approved equal, with a standard dimension ratio (SDR) of 11 as shown on the Engineering Drawings.
 - d) HDPE pipe shall meet the requirements of cell classification PE 345464C or higher cell classification in accordance with ASTM D3350.
 - e) The slots or perforations must conform with the Engineering Drawings.
 - f) The pipe shall be as uniform as commercially practical in color, opacity, density, and other physical properties.
 - g) Apart from structural voids and hollows associated with some profile wall designs, the pipe fittings shall be homogeneous throughout and free from visible cracks, holes, foreign inclusions or other defects.
2. HDPE Pipe Fittings
- a) HDPE fittings shall be manufactured in accordance with the requirements of ASTM E714.
 - b) End caps for the clean-out risers will be of low pressure type HDPE, or similar.

11.3 Polyvinyl Chloride (PVC) Geopipe Material Properties

If Polyvinyl Chloride (PVC) Pipe is utilized for the leak extraction or leachate collection pipe, the material will be manufactured in accordance with ASTM D1784 and have the following physical characteristics:

- a) PVC pipe will be Schedule 80 or as indicated on the Drawings. The pipes will conform to the requirements of ASTM D1785 and will have the nominal dimensions shown on the Engineering Drawings.
- b) Pipe and fitting will be manufactured from a PVC compound which meets the requirements of Type 1, Grade 1, Polyvinyl chloride (PVC) as outlined in ASTM D1784. A Type1, Grade 1 compound is characterized as having the highest requirements for mechanical properties and chemical resistance.
- c) Pipe will be furnished in standard laying lengths not exceeding twenty (20) feet.
- d) Fittings will conform to the requirements of ASTM D2467 for socket type joints.
- e) Slotted or perforated 6- inch diameter PVC leachate collection pipe as shown on the Engineering Drawings.
- f) Solid wall 12-inch diameter PVC leachate extraction pipe as shown on the Engineering Drawings.
- g) Solid wall leak detection pipe as shown on the Engineering Drawings.
- h) The pipe will be solvent welded according to manufacture specifications

11.4 Manufacturer's Quality Control Documentation

Prior to installation of the geopipe, the Contractor shall provide the following information certified by the manufacturer for the delivered geopipe:

1. Manufacturer's certification verifying that the quality of the raw materials used to manufacture the geopipe meets the Manufacturer specifications.
2. Each geopipe length delivered to the project site shall have the following identification information:
 - Manufacturer's name
 - Pipe size
 - Ring stiffness constant classification or SDR number
 - Production code designating plant location, machine, and date of manufacture.

11.5 Delivery, Storage and Handling

1. Off-loading and storage of the geopipe shall be performed by the Contractor.
2. Storage of the geopipe shall not exceed 17 rows high, as per Manufacturer's recommendation.
3. The Contractor shall be responsible for moving the pipes and fittings from the storage area to the area of pipe installation. The Contractor shall be responsible for replacing any material damaged during transport or installation.

11.6 Quality Assurance

1. Finished Product Evaluation
 - A. Each length of pipe produced shall be checked by production staff for the items listed below. The results of measurements shall be recorded on production sheets which become part of the Manufacturer's permanent records.
 - 1) Pipe in process shall be checked visually, inside and out for cosmetic defects (grooves, pits, hollows, etc.).
 - 2) Pipe outside diameter shall be measured using a suitable periphery tape to ensure conformance with ASTM D1785.
 - 3) Pipe wall thickness shall be measured at 12 equally spaced locations around the circumference at both ends of the pipe to ensure conformance with the Manufacturer's specifications.
 - 4) Pipe length shall be measured.
 - 5) Pipe marking shall be examined and checked for accuracy.
 - 6) Pipe ends shall be checked to ensure they are cut square and clean.

11.7 Installation

11.7.1 Leachate Collection Pipe

1. Leachate Collection Trench Preparation
 - A. Before the geopipe is placed into position in the trench, the following procedures will be completed:

- 1) The subgrade at the bottom and sides of the trench shall be carefully prepared as shown on the Engineering Drawings by the Contractor.
 - 2) The subgrade will be covered by a composite liner by the Liner Installer according to the Engineering Drawings.
2. Geotextile Installation
- A. After composite liner placement has been approved, the Liner Installer shall place the non-woven geotextile in the bottom of the leachate trench to ensure protection of the composite liner from the overlying select aggregate layer in accordance with the Geotextile Cushioning Fabric specifications.
3. Bedding Layer Installation
- A. Placement of a three 3-inch bedding layer in the V-notch trench and above the geotextile consisting of select aggregate, 0.75 inch minimum diameter to 2.0 inch maximum diameter (maximum 2% fines by dry weight) will be performed.
 - 1) "Spading" with shovels or any other activities which could jeopardize the underlying liner's integrity will not be allowed.
 - 2) The three (3) inch bedding layer is discussed in more detail under Protective Soil Layer and Select Aggregate (Section 9.0).
4. Leachate Collection Pipe Installation
- A. Polyvinyl Chloride (PVC) Leachate Collection Pipe Installation.
 - 1) Installation of the 6-inch diameter perforated SCH 80 PVC pipe onto the bedding layer will be performed in such a manner as not to jeopardize the integrity of the pipe.
 - 2) Each pipe section shall be accurately placed to the line and grade called for on the Engineering Drawings.
 - 3) Pipe and fittings shall be inspected before being placed and no defective pipe shall be laid. Installation practices shall conform with ASTM D2321 and specific Manufacturer's recommendations.
 - 4) Trenches shall be kept free from water during pipe laying, jointing or before sufficient backfill has been placed to prevent flotation of the pipe. The Pipe Contractor shall provide ample means and devices to remove and dispose of water promptly from any source entering the construction area of pipe laying.
 - 5) No connection shall be made where joint surfaces and joint materials have been soiled by earth handling until such surfaces are thoroughly cleaned.
 - 6) As the work progresses, the interior of pipes shall be kept clean by the Contractor. After each line of pipe has been laid, it shall be carefully inspected and earth, trash, rags, and other foreign matter removed from the interior.
 - 7) Slots/perforations on adjoining sections of pipe shall remain in alignment after fusion welding.
 - 8) Two sets of pipe slots/perforations shall be facing vertically down after pipe placement in the trench.
 - B. High Density Polyethylene (HDPE) Leachate Collection Pipe Installation
 - 1) Installation of the 6-inch diameter perforated SDR 11 HDPE pipe onto the bedding layer will be performed in such a manner as not to jeopardize the integrity of the pipe.

- 2) Trenches shall be kept free from any deleterious material, water or backfill to prevent damage to the pipe. The Contractor shall provide means and devices to remove promptly and dispose of any deleterious material, or water entering the area of pipe laying.
 - 3) Installation practices shall conform with ASTM D2321 and any specific manufacturer's recommendations.
 - 4) HDPE pipe joints shall be butt fused in the field in accordance with the manufacturer's instructions. Fused joints, when tested for tension and pressure, shall be stronger than the pipe itself.
 - 5) As many sections of pipe as practical shall be fused together outside of the lined landfill cell to minimize damage to the liner system during pipe fusion.
 - 6) No connection shall be made where joint surfaces and joint materials have been soiled until such surfaces are thoroughly cleaned.
 - 7) As the work progresses, the interior of pipes shall be kept clean. After each line of pipe has been laid, it shall be carefully inspected and earth, trash, rags, and other foreign matter removed from the interior.
 - 8) Slots/perforations on adjoining sections of pipe shall remain in alignment after fusion welding.
 - 9) Two sets of pipe slots/perforations shall be facing vertically down after pipe placement in the trench.
5. Field Quality Control
- a) After completion of any section of geopipe; the grades, joints, and alignment shall be true to line and grade.
 - b) The leachate collection pipe grade shall be surveyed on maximum 50 foot centers for compliance with the approved design.
 - c) The Site CQA Manager shall inspect the installation. The pipe shall be completely free from any cracks and from protruding joint materials, deposits of sand, mortar, dirt, debris or other materials on the inside.
6. Leachate Trench Backfill
- 1) The Contractor shall backfill completed sections of pipe trench with additional select aggregate (0.75 inch to 2.0 inch diameter) around and above the pipe to a minimum thickness of 12 inches above the pipe as shown on the Engineering Drawings. Backfilling over the pipe trench will be allowed only after placement and workmanship have been approved by the Site CQA Manager.
 - 2) Placement of a geotextile layer will be completed as shown on the Engineering Drawings.

11.7.2 Leachate Collection and Leak Detection Sumps

1. Leachate Collection and Leak Detection Sump Preparation
 - A. Before the leachate collection and leak detection riser geopipe is placed into position in the sumps, the following procedures will be completed:
 - 1) The subgrade at the bottom and sides of the sumps shall be carefully prepared as shown on the Engineering Drawings by the Contractor.
 - 2) The subgrade will be covered by a composite liner by the Liner Installer according to the Engineering Drawings.

2. Geotextile Installation
 - A. After composite liner placement has been approved, the Installer shall place the non-woven geotextile in the bottom of the leachate collection and leak detection sumps to ensure protection of the composite liner from the overlying select aggregate layer in accordance with the Geotextile Cushioning Fabric specifications.
3. Select Aggregate Installation
 - A. Placement of 2 feet of select aggregate in the sumps and above the geotextile consisting of 0.75 inch minimum diameter to 2.0 inch maximum diameter (min 2% fines by dry weight) will be performed. "Spading" with shovels or any other activities which could jeopardize the underlying composite liner's integrity will not be allowed.
4. Leachate Extraction and Leak Detection Pipe Installation
 - A. Polyvinyl Chloride (PVC) Leachate Extraction and Leak Detection Pipe Installation.
 - 1) Installation of the 12-inch pipe in the leachate collection and leak detection sumps will be performed in such a manner as not to jeopardize the integrity of the pipe.
 - 2) Each pipe section shall be accurately placed to the line and alignment called for on the Engineering Drawings.
 - 3) Pipe and fittings shall be inspected before being placed and no defective pipe shall be laid. Installation practices shall conform with ASTM D2321 and specific Manufacturer's recommendations.
 - 4) Sumps shall be kept free from water during extraction pipe installation, jointing or before sufficient select aggregate backfill has been placed to prevent flotation of the pipe. The Pipe Contractor shall provide ample means and devices to remove and dispose of water promptly from any source entering the construction area of pipe laying.
 - 5) No connection shall be made where joint surfaces and joint materials have been soiled by earth handling until such surfaces are thoroughly cleaned.
 - 6) As the work progresses, the interior of pipes shall be kept clean by the Contractor. After each extraction pipe has been laid along the side slope, it shall be carefully inspected and earth, trash, rags, and other foreign matter removed from the interior.
 - 7) Slots/perforations on the bottom 6 feet of the leachate extraction and leak detection riser pipes shall be as shown on the Engineering Drawings.
 - B. High Density Polyethylene (HDPE) Leachate Collection and Leak Detection Pipe Installation
 - 1) Installation of the 12-inch or 4-inch diameter SDR 11 HDPE pipe in the leachate collection and leak detection sumps will be performed in such a manner as not to jeopardize the integrity of the pipe.
 - 2) Each pipe section shall be accurately placed to the line and alignment called for on the Engineering Drawings.
 - 3) The leachate collection and leak detection sumps shall be kept free from any deleterious material, water or backfill to prevent damage to the pipe. The Contractor shall provide means and devices to remove promptly and dispose of any deleterious material, or water entering the area of pipe laying.
 - 4) Installation practices shall conform with ASTM D2321 and any specific manufacturer's recommendations.

- 5) HDPE pipe joints shall be butt fused in the field in accordance with the manufacturer's instructions. Fused joints, when tested for tension and pressure, shall be stronger than the pipe itself.
 - 6) As many sections of pipe as practical shall be fused together outside of the composite lined area to minimize damage to the composite liner during pipe fusion.
 - 7) No connection shall be made where joint surfaces and joint materials have been soiled until such surfaces are thoroughly cleaned.
 - 8) As the work progresses, the interior of pipes shall be kept clean. After each line of pipe has been laid along the side slope, it shall be carefully inspected and earth, trash, rags, and other foreign matter removed from the interior.
 - 9) Slots/perforations on the bottom 6 feet of the leachate extraction and leak detection riser pipes shall be as shown on the Engineering Drawings.
5. Field Quality Control
- a) After completion of any section of the leachate collection and leak detection geopipe; the joints and alignment along the side slopes shall be true to line and alignment.
 - b) The Site CQA Manager shall inspect the installation. The pipe shall be completely free from any cracks and from protruding joint materials, deposits of sand, mortar, dirt, debris or other materials on the inside.
 - c) Placement of a geotextile layer will be completed as shown on the Engineering Drawings.

12.0 ENGINEERING CERTIFICATION

An Engineering Certification Report, incorporating the laboratory and field data, shall be submitted by Engineer to the New Mexico Energy, Minerals and Natural Resources Department, Oil Conservation Division confirming that the subgrade, liner, leak detection system and leachate collection system have been installed in compliance with the project specifications and the CQA Plan. The Engineering Certification Report shall be sealed by a Professional Engineer registered in good standing with New Mexico; and who has applicable expertise in landfill liner engineering.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.A
LINER QUALITY CONTROL PROJECT SPECIFICATIONS**

**Liner Quality Control Project Specifications
DNCS Environmental Solutions**

1. Project Data

Site Name: _____ Date Prepared _____

Project/Cell: _____

Project Number _____ Project Start Date _____

Project Size _____ Acres or ft²

Location _____

Client Contact: _____

Phone: _____

Site Phone: _____

| | Initials |
|-------------------|----------|
| I Project Manager | _____ |
| CQA Officer | _____ |
| CQA Technicians | _____ |
| _____ | _____ |
| _____ | _____ |

Project Documentation Available

CQA Plan _____ Construction Drawings _____ Health and Safety Plan _____

Other: _____

Comments: _____

GORDON ENVIRONMENTAL, INC.

Liner Quality Control Project Specifications
DNCS Environmental Solutions

2. Subgrade/Soil Liner

2.1 Grade Control (Survey)

Area: _____ Acres or ft²

Performed By: _____

Date Performed: _____

Tolerance (vert) _____ feet or inches

As-Built Drawing(s) Available? Y or N

Thickness _____ feet or inches

NMED Standard = 1 per acre

2.2 Compaction

Reference Proctor(s) _____ lb/ft³

Standard (ASTM D698) _____ lb/ft³

Modified (ASTM D1557) _____ lb/ft³

Sample ID Maximum Density Optimum Moisture

Specifications

Density _____ % of Optimum
_____ lb/ft³

Moisture _____ lb/ft³

Number of Lifts: _____

Lift Thickness (inches):

Loose: _____ Compacted: _____

Field Test Frequency: _____ per: acre/lift yd³ other units: _____

Compaction Test Method: Nuclear Density Meter or Other: _____

Total Number of Density Tests Required _____

NMED Standard = 4/acre/lift

Field Permeability Tests required? Y or N

Perm Test Method _____

GORDON ENVIRONMENTAL, INC.

Liner Quality Control Project Specifications

DNCS Environmental Solutions

2.3 Soil Classification Standards

Acceptable USCS: (circle or box)

| | | | |
|----|----|----|----|
| GW | SW | ML | MH |
| GP | SP | CL | CH |
| GM | SM | OL | OH |
| GC | SC | | |

Subgrade/Liner Material Testing:

in situ _____ borrow source: _____

| Testing Frequency | | Quality Requirements | |
|-------------------|------|----------------------|------|
| Project | NMED | Project | NMED |

Grain Size:

#200 Sieve _____ (percent passing)
 $C_u (D_{60}/D_{10})$ _____
Other _____

Atterberg Limits: P.I.

Liquid Limit _____
Plastic Limit _____
Other _____

Laboratory Permeability: _____

2.4 Surface Preparation Y or N

_____ smooth surface
_____ remove angular material
_____ remove organic material
_____ remove rocks greater than _____ inches

GORDON ENVIRONMENTAL, INC.

**Liner Quality Control Project Specifications
DNCS Environmental Solutions**

3.0 Geosynthetics

Conformance Tests

3.1 GCL

Area: _____ Acres or ft²

Specifications: _____

collected by _____
performed by _____
frequency _____
total number _____

3.2 FML

Specifications: _____ 60 mil

_____ other

collected by _____
performed by _____
frequency _____
total number _____

HDPE Smooth Area: _____ Acres or ft²

HDPE Textured Area: _____ Acres or ft²

Other _____ Area: _____ Acres or ft²

3.3 Geotextile (not including leachate system)

Specifications: _____ oz

Woven or Nonwoven

Area: _____ Acres or ft²

collected by _____
performed by _____
frequency _____
total number _____

3.4 Geonet

Area: _____ Acres or ft²

Specifications: _____ thickness

with Geotextile:

upper _____ lower _____

collected by _____
performed by _____
frequency _____
total number _____

GORDON ENVIRONMENTAL, INC.

**Liner Quality Control Project Specifications
DNCS Environmental Solutions**

4.0 Leachate Collection System

Conformance Tests

4.1 Piping

| | |
|-------------------|-----------------------|
| Collection System | Specifications: _____ |
| Linear Quantity | Material _____ |
| | Diameter _____ |
| | _____ |
| Risers | Specifications: _____ |
| Linear Quantity | Material _____ |
| | Diameter _____ |

4.2 Aggregate

Specifications: _____
greater than _____
smaller than _____

| | |
|--------------|-------|
| collected by | _____ |
| performed by | _____ |
| frequency | _____ |
| total number | _____ |

4.3 Geotextile

Specifications: _____ oz
Woven or Nonwoven _____

Area: _____ Acres or ft²

| | |
|--------------|-------|
| collected by | _____ |
| performed by | _____ |
| frequency | _____ |
| total number | _____ |

4.4 Sump

Design volume _____ yd³ or gallons
Double Lined? Y or N
Area of double liner _____ ft²

5.0 Protective Soil Layer

Conformance Tests

Area: _____ Acres or ft²

Thickness (inches): _____

Volume _____ yd³

| | |
|--------------|-------|
| performed by | _____ |
| frequency | _____ |
| total number | _____ |

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.B
APPROVAL/AUTHORIZATION TO PROCEED FORM**

APPROVAL/AUTHORIZATION TO PROCEED FORM

THE FOLLOWING LINER SYSTEM SURFACE IS DEEMED ACCEPTABLE ON A VISUAL INSPECTION BY LINER CONTRACT REPRESENTATIVE:

PROJECT:

LAYER:

1. SUBGRADE

2. GEOSYNTHETIC CLAY LINER (GCL)

3. HDPE GEOMEMBRANE (FML)

4. GEONET

LOCATION:

TO

TO

REMARKS:

THE ABOVE NOTED LAYER IS NOW ACCEPTABLE FOR COVERING BY THE NEXT LAYER.

AUTHORIZATION BY:

LINER CONTRACTOR REPRESENTATIVE

SIGNATURE

DATE

PRINT NAME

SUBMITTED TO:

CQA REPRESENTATIVE

SIGNATURE

DATE

PRINT NAME

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.C
DAILY SUMMARY REPORT**

DAILY SUMMARY REPORT

Project: _____ **Project No.:** _____
Owner: _____ **Date:** _____
Project Location: _____ **Report No.:** _____
Weather: _____
A.M.: °F,
P.M.: °F,

Contractor(s)

Summary of Daily Construction Progress and Inspections:

Summary of Problems and Resolutions:

Equipment:

Summary of Meeting Held and Attendees:

Site CQA Technician

GEI CQA Officer

Signature

Signature

Print Name

Print Name

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.D
FIELD COMPACTION TESTING FORM**

FIELD COMPACTION TESTING FORM

| PROJECT INFORMATION | |
|-----------------------------------|-------------------------|
| PROJECT NAME: | PROJECT NO.: |
| OWNER: | DATE: |
| PROJECT LOCATION: | PAGE NO.: |
| TESTING INSTRUMENT | TECHNICIAN: |
| REFERENCE STANDARD PROCTOR (RSP): | REFERENCE MOISTURE (%): |

[illegible][illegible]

REVIEWED BY:

DATE: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.E
GCL INVENTORY CONTROL LOG**

GCL INVENTORY CONTROL LOG

| | |
|---|--|
| PROJECT NAME: _____ OWNER: _____ PROJECT LOCATION: _____ | PROJECT NUMBER: _____ CONTRACTOR: _____ SHEET NUMBER: _____ |
| MATERIAL TYPE: _____ MATERIAL IDENTIFICATION: _____ MATERIAL MANUFACTURER: _____ | DATE OF INVENTORY: _____ INVENTORY MONITOR: _____ UNLOADING METHOD: _____ |

| | ROLL NUMBER | BATCH OR LOT NO. | MATERIAL DIMENSIONS | | | MANUF. QC CERT. (Y/N) | CONFORMANCE SAMPLE (Y/N) | REMARKS |
|----|----------------|------------------------|---------------------|---------------|----------------------------|--------------------------------|--------------------------------|---------|
| | | | LENGTH (FT) | WIDTH (FT) | AREA (FT ²) | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.F
FML INVENTORY CONTROL LOG**

FML INVENTORY CONTROL LOG

| | |
|---|--|
| PROJECT NAME: _____ OWNER: _____ PROJECT LOCATION: _____ | PROJECT NUMBER: _____ CONTRACTOR: _____ SHEET NUMBER: _____ |
| MATERIAL TYPE: _____ MATERIAL IDENTIFICATION: _____ MATERIAL MANUFACTURER: _____ | DATE OF INVENTORY: _____ INVENTORY MONITOR: _____ UNLOADING METHOD: _____ |

| | ROLL NUMBER | BATCH OR LOT NO. | MATERIAL DIMENSIONS | | | MANUF. QC CERT. (Y/N) | CONFORMANCE SAMPLE (Y/N) | REMARKS |
|----|----------------|------------------------|---------------------|---------------|---------------------------|--------------------------------|--------------------------------|---------|
| | | | LENGTH (FT) | WIDTH (FT) | THICKNESS OR WEIGHT | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.G
GEONET INVENTORY CONTROL LOG**

GEONET INVENTORY CONTROL LOG

| | |
|---|--|
| PROJECT NAME: _____ OWNER: _____ PROJECT LOCATION: _____ | PROJECT NUMBER: _____ CONTRACTOR: _____ SHEET NUMBER: _____ |
| MATERIAL TYPE: _____ MATERIAL IDENTIFICATION: _____ MATERIAL MANUFACTURER: _____ | DATE OF INVENTORY: _____ INVENTORY MONITOR: _____ UNLOADING METHOD: _____ |

| | ROLL NUMBER | BATCH OR LOT NO. | MATERIAL DIMENSIONS | | | MANUF. QC CERT. (Y/N) | CONFORMANCE SAMPLE (Y/N) | REMARKS |
|----|----------------|------------------------|---------------------|---------------|---------------------------|--------------------------------|--------------------------------|---------|
| | | | LENGTH (FT) | WIDTH (FT) | THICKNESS OR WEIGHT | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.H
GEOTEXTILE INVENTORY CONTROL LOG**

GEOTEXTILE INVENTORY CONTROL LOG

PROJECT NAME: _____
 OWNER: _____
 PROJECT LOCATION: _____

PROJECT NUMBER: _____
 CONTRACTOR: _____
 SHEET NUMBER: _____

MATERIAL TYPE: _____
 MATERIAL IDENTIFICATION: _____
 MATERIAL MANUFACTURER: _____

DATE OF INVENTORY: _____
 INVENTORY MONITOR: _____
 UNLOADING METHOD: _____

| | ROLL NUMBER | BATCH OR LOT NO. | MATERIAL DIMENSIONS | | | MANUF. QC CERT. (Y/N) | CONFORMANCE SAMPLE (Y/N) | REMARKS |
|----|----------------|------------------------|---------------------|---------------|---------------------------|--------------------------------|--------------------------------|---------|
| | | | LENGTH (FT) | WIDTH (FT) | THICKNESS OR WEIGHT | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.I
LEACHATE COLLECTION AND EXTRACTION PIPE INVENTORY CONTROL LOG**

LEACHATE COLLECTION AND EXTRACTION PIPE INVENTORY CONTROL LOG

PROJECT NAME: _____

OWNER: _____

PROJECT LOCATION: _____

PROJECT NUMBER: _____

CONTRACTOR: _____

SHEET NUMBER: _____

MATERIAL TYPE: _____

MATERIAL IDENTIFICATION: _____

MATERIAL MANUFACTURER: _____

DATE OF INVENTORY: _____

INVENTORY MONITOR: _____

UNLOADING METHOD: _____

| | TYPE | QUANTITY | MATERIAL DIMENSIONS | | | MANUF. QC CERT. (Y/N) | TOTAL LENGTH (FT) | DATE INVENTORIED |
|----|------|----------|---------------------|--------------|-------------|--------------------------------|-------------------------|---------------------|
| | | | LENGTH (FT) | DIA. (IN) | PIPE SDR | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.J
GCL DEPLOYMENT LOG**

GCL DEPLOYMENT LOG

| | | | |
|--------------------------|-------|------------------------|-------|
| PROJECT NAME: | _____ | PROJECT NUMBER: | _____ |
| OWNER: | _____ | CONTRACTOR: | _____ |
| PROJECT LOCATION: | _____ | SHEET NUMBER: | _____ |

[illegible]

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.K
FML DEPLOYMENT LOG**

FML DEPLOYMENT LOG

PROJECT NAME:

PROJECT NUMBER:

OWNER:

CONTRACTOR:

PROJECT LOCATION:

SHEET NUMBER:

| PANEL NUMBER | ROLL NUMBER | APPROXIMATE LENGTH (FT) | APPROXIMATE WIDTH (FT) | APPROXIMATE AREA (FT ²) | DATE INSTALLED |
|--|----------------|-------------------------------|------------------------------|---|-------------------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| TOTAL LINER PLACED (FT ²): | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.L
FML TRIAL SEAMING TEST LOG**

FML TRIAL SEAMING TEST LOG

| PROJECT INFORMATION | | | | | | | | | PROJECT SPECIFICATIONS | | | | | |
|---------------------|------|----------------|----------------------|-------------------|-----------------|-------|-----------------|---------------|------------------------|--------------------|---------|-----------|---------|------------|
| PROJECT NAME: | | | | | PROJECT NUMBER: | | | | FUSION | TEXTURED: | PEEL | 98 lbs/in | SHEAR | 121 lbs/in |
| OWNER: | | | | | CONTRACTOR: | | | | | SMOOTH: | PEEL | 98 lbs/in | SHEAR | 121 lbs/in |
| PROJECT LOCATION: | | | | | SHEET NUMBER: | | | | EXTRUSION | TEXTURED: | PEEL | 78 lbs/in | SHEAR | 121 lbs/in |
| | | | | | | | | | | SMOOTH: | PEEL | 78 lbs/in | SHEAR | 121 lbs/in |
| DATE | TIME | QC INITIALS | WELDER'S INITIALS | MACHINE NUMBER | WEDGE WELDS | | EXTRUSION WELDS | | PULL | FIELD TEST RESULTS | | | | |
| | | | | | Temperature | Speed | Barrel Temp | Pre-Heat Temp | | Test #1 | Test #2 | Test #3 | Test #4 | Test #5 |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | P | | | | | |
| | | | | | | | | | S | | | | | |

REVIEWED BY: _____

DATE: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.M
FML SEAMING LOG**

FML SEAMING LOG

PROJECT NAME: _____
OWNER: _____
PROJECT LOCATION: _____

PROJECT NUMBER: _____
CONTRACTOR: _____
SHEET NUMBER: _____

| | DATE | PANEL #/PANEL # | APPROX. LENGTH WELDED | START TIME | SEAMER INITIALS | MACHINE # | TEMP SETTING | SPEED SETTING | DESTRUCTIVE TEST | MONITORED BY |
|----|------|-----------------|-----------------------------|---------------|--------------------|--------------|-----------------|------------------|---------------------|-----------------|
| 1 | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | | | | | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | | | | | |
| 7 | | | | | | | | | | |
| 8 | | | | | | | | | | |
| 9 | | | | | | | | | | |
| 10 | | | | | | | | | | |
| 11 | | | | | | | | | | |
| 12 | | | | | | | | | | |
| 13 | | | | | | | | | | |
| 14 | | | | | | | | | | |
| 15 | | | | | | | | | | |
| 16 | | | | | | | | | | |
| 17 | | | | | | | | | | |
| 18 | | | | | | | | | | |
| 19 | | | | | | | | | | |
| 20 | | | | | | | | | | |
| 21 | | | | | | | | | | |
| 22 | | | | | | | | | | |
| 23 | | | | | | | | | | |
| 24 | | | | | | | | | | |
| 25 | | | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.N
FML SEAM PRESSURE TEST LOG**

FML SEAM PRESSURE TEST LOG

| PROJECT INFORMATION | | | | | | | | PROJECT SPECIFICATIONS |
|---------------------|-----------------|--------|-------|-----------------|----------|-------|--------------|------------------------|
| PROJECT NAME: | | | | PROJECT NUMBER: | | | | MIN START PSI: |
| OWNER: | | | | CONTRACTOR: | | | | TEST DURATION: |
| PROJECT LOCATION | | | | SHEET NUMBER: | | | | MAX PSI DROP: |
| DATE | PANEL #/PANEL # | TESTER | TIME | | PRESSURE | | MONITORED BY | PASS/FAIL |
| | | | START | FINISH | INITIAL | FINAL | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |
| 31 | | | | | | | | |
| 32 | | | | | | | | |
| 33 | | | | | | | | |
| 34 | | | | | | | | |
| 35 | | | | | | | | |
| 36 | | | | | | | | |
| 37 | | | | | | | | |
| 38 | | | | | | | | |
| 39 | | | | | | | | |
| 40 | | | | | | | | |
| 41 | | | | | | | | |
| 42 | | | | | | | | |
| 43 | | | | | | | | |
| 44 | | | | | | | | |
| 45 | | | | | | | | |
| 46 | | | | | | | | |
| 47 | | | | | | | | |
| 48 | | | | | | | | |
| 49 | | | | | | | | |
| 50 | | | | | | | | |
| 51 | | | | | | | | |
| 52 | | | | | | | | |
| 53 | | | | | | | | |
| 54 | | | | | | | | |
| 55 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.O
FML DESTRUCTIVE FIELD TEST RECORD**

FML DESTRUCTIVE FIELD TEST RECORD

| PROJECT INFORMATION | | | | | | | | | PROJECT SPECIFICATIONS | | | | | | |
|---------------------|------|-------------|-------------------|----------------|-----------------|-------|-------------|---------------|------------------------|--------------------|---------|-----------|---------|------------|----------|
| PROJECT NAME: | | | | | PROJECT NUMBER: | | | | FUSION | TEXTURED: | PEEL | 98 lbs/in | SHEAR | 121 lbs/in | |
| OWNER: | | | | | CONTRACTOR: | | | | | SMOOTH: | PEEL | 98 lbs/in | SHEAR | 121 lbs/in | |
| PROJECT LOCATION: | | | | | SHEET NUMBER: | | | | EXTRUSION | TEXTURED: | PEEL | 78 lbs/in | SHEAR | 121 lbs/in | |
| | | | | | | | | | | SMOOTH: | PEEL | 78 lbs/in | SHEAR | 121 lbs/in | |
| DATE | DT # | QC INITIALS | WELDER'S INITIALS | MACHINE NUMBER | WEDGE WELDS | | EXTRUSION | | PULL | FIELD TEST RESULTS | | | | | COMMENTS |
| | | | | | Temperature | Speed | Barrel Temp | Pre-Heat Temp | | Test #1 | Test #2 | Test #3 | Test #4 | Test #5 | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | P | | | | | | |
| | | | | | | | | | S | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.P
FML SEAM VACUUM TEST/REPAIR LOG**

FML SEAM VACUUM TEST/REPAIR LOG

PROJECT NAME: _____ PROJECT NUMBER: _____
 OWNER: _____ CONTRACTOR: _____
 PROJECT LOCATION: _____ SHEET NUMBER: _____

| | REPAIR DATE | PANEL | TYPE OF REPAIR | REPAIR TECH | NUMBER OF LEAKS | TESTING TECH ID | DATE ACCEPTED | COMMENTS |
|----|----------------|-------|-------------------|----------------|-----------------------|--------------------|------------------|----------|
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| 21 | | | | | | | | |
| 22 | | | | | | | | |
| 23 | | | | | | | | |
| 24 | | | | | | | | |
| 25 | | | | | | | | |
| 26 | | | | | | | | |
| 27 | | | | | | | | |
| 28 | | | | | | | | |
| 29 | | | | | | | | |
| 30 | | | | | | | | |
| 31 | | | | | | | | |
| 32 | | | | | | | | |
| 33 | | | | | | | | |
| 34 | | | | | | | | |
| 35 | | | | | | | | |
| 36 | | | | | | | | |
| 37 | | | | | | | | |
| 38 | | | | | | | | |
| 39 | | | | | | | | |
| 40 | | | | | | | | |
| 41 | | | | | | | | |
| 42 | | | | | | | | |
| 43 | | | | | | | | |
| 44 | | | | | | | | |
| 45 | | | | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.Q
GEONET DEPLOYMENT LOG**

GEONET DEPLOYMENT LOG

PROJECT NAME: _____ PROJECT NUMBER: _____
 OWNER: _____ CONTRACTOR: _____
 PROJECT LOCATION: _____ SHEET NUMBER: _____

| PANEL NUMBER | ROLL NUMBER | APPROXIMATE LENGTH (FT) | APPROXIMATE WIDTH (FT) | APPROXIMATE AREA (FT ²) | DATE INSTALLED |
|---|----------------|-------------------------------|------------------------------|---|-------------------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| TOTAL LINER PLACED (FT²): | | | | | |

REVIEWED BY: _____ **DATE:** _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 7: LINER CONSTRUCTION QUALITY ASSURANCE (CQA) PLAN**

**ATTACHMENT II.7.R
GEOTEXTILE DEPLOYMENT LOG**

GEOTEXTILE DEPLOYMENT LOG

PROJECT NAME: _____ PROJECT NUMBER: _____
 OWNER: _____ CONTRACTOR: _____
 PROJECT LOCATION: _____ SHEET NUMBER: _____

| PANEL NUMBER | ROLL NUMBER | APPROXIMATE LENGTH (FT) | APPROXIMATE WIDTH (FT) | APPROXIMATE AREA (FT ²) | DATE INSTALLED |
|---|-------------|-------------------------|------------------------|-------------------------------------|----------------|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| TOTAL LINER PLACED (FT²): | | | | | |

REVIEWED BY: _____

DATE: _____

GORDON ENVIRONMENTAL, INC.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 8: VADOSE ZONE MONITORING PLAN**

Table of Contents

| | | |
|-----|--------------------------------------|---------|
| 1.0 | INTRODUCTION | II.8-1 |
| 1.1 | Purpose | II.8-1 |
| 1.2 | Site Location | II.8-1 |
| 1.3 | Facility Description | II.8-3 |
| 2.0 | VADOSE ZONE MONITORING NETWORK | II.8-3 |
| 2.1 | Monitoring Well Locations | II.8-3 |
| 2.2 | Well Drilling and Completion | II.8-7 |
| 3.0 | VADOSE ZONE MONITORING PROGRAM | II.8-10 |
| 3.1 | Monitoring Schedule | II.8-10 |
| 3.2 | Monitoring Assessment | II.8-10 |
| 3.3 | Monitoring Data Evaluation | II.8-11 |

List of Figures

| Figure No. | Title | Page |
|------------|--|--------|
| II.8.1 | SITE LOCATION MAP | II.8-2 |
| II.8.2 | SITE PLAN | II.8-4 |
| II.8.3 | TRIASSIC REDBED SURFACE | II.8-5 |
| II.8.4 | VADOSE ZONE MONITORING NETWORK | II.8-6 |
| II.8.5 | VADOSE ZONE MONITORING WELL CONSTRUCTION DETAIL | II.8-9 |

List of Tables

| Table No. | Title | Page |
|-----------|--|---------|
| II.8.1 | VADOSE ZONE MONITORING WELL INSTALLATION SPECIFICATIONS | II.8-8 |
| II.8.2 | VADOSE ZONE MONITORING PARAMETERS | II.8-12 |

List of Attachments

| Attachment No. | Title |
|----------------|---------------------------------------|
| II.8.A | PROPOSAL FOR VADOSE ZONE MONITORING |
| II.8.B | VADOSE ZONE MONITORING FORM (TYPICAL) |

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 8: VADOSE ZONE MONITORING PLAN**

1.0 INTRODUCTION


DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Purpose

The purpose of this Vadose Zone Monitoring Plan (the Plan) is to provide DNCS plans for the monitoring, recordkeeping, and reporting procedures for the site's vadose zone monitoring system. The Plan, as presented herein, is based, in part, on the OCD-approved "Proposal for Vadose Zone Monitoring" provided as **Attachment II.8.A**. The Plan identifies the locations of up to ten vadose zone monitoring points that are positioned appropriately to provide for early detection of potential fluid releases at the site; and provides additional guidance for monitoring point installation.

1.2 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of a 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM (**Figure II.1.1**). Site access will be provided via the south side of NM 529.

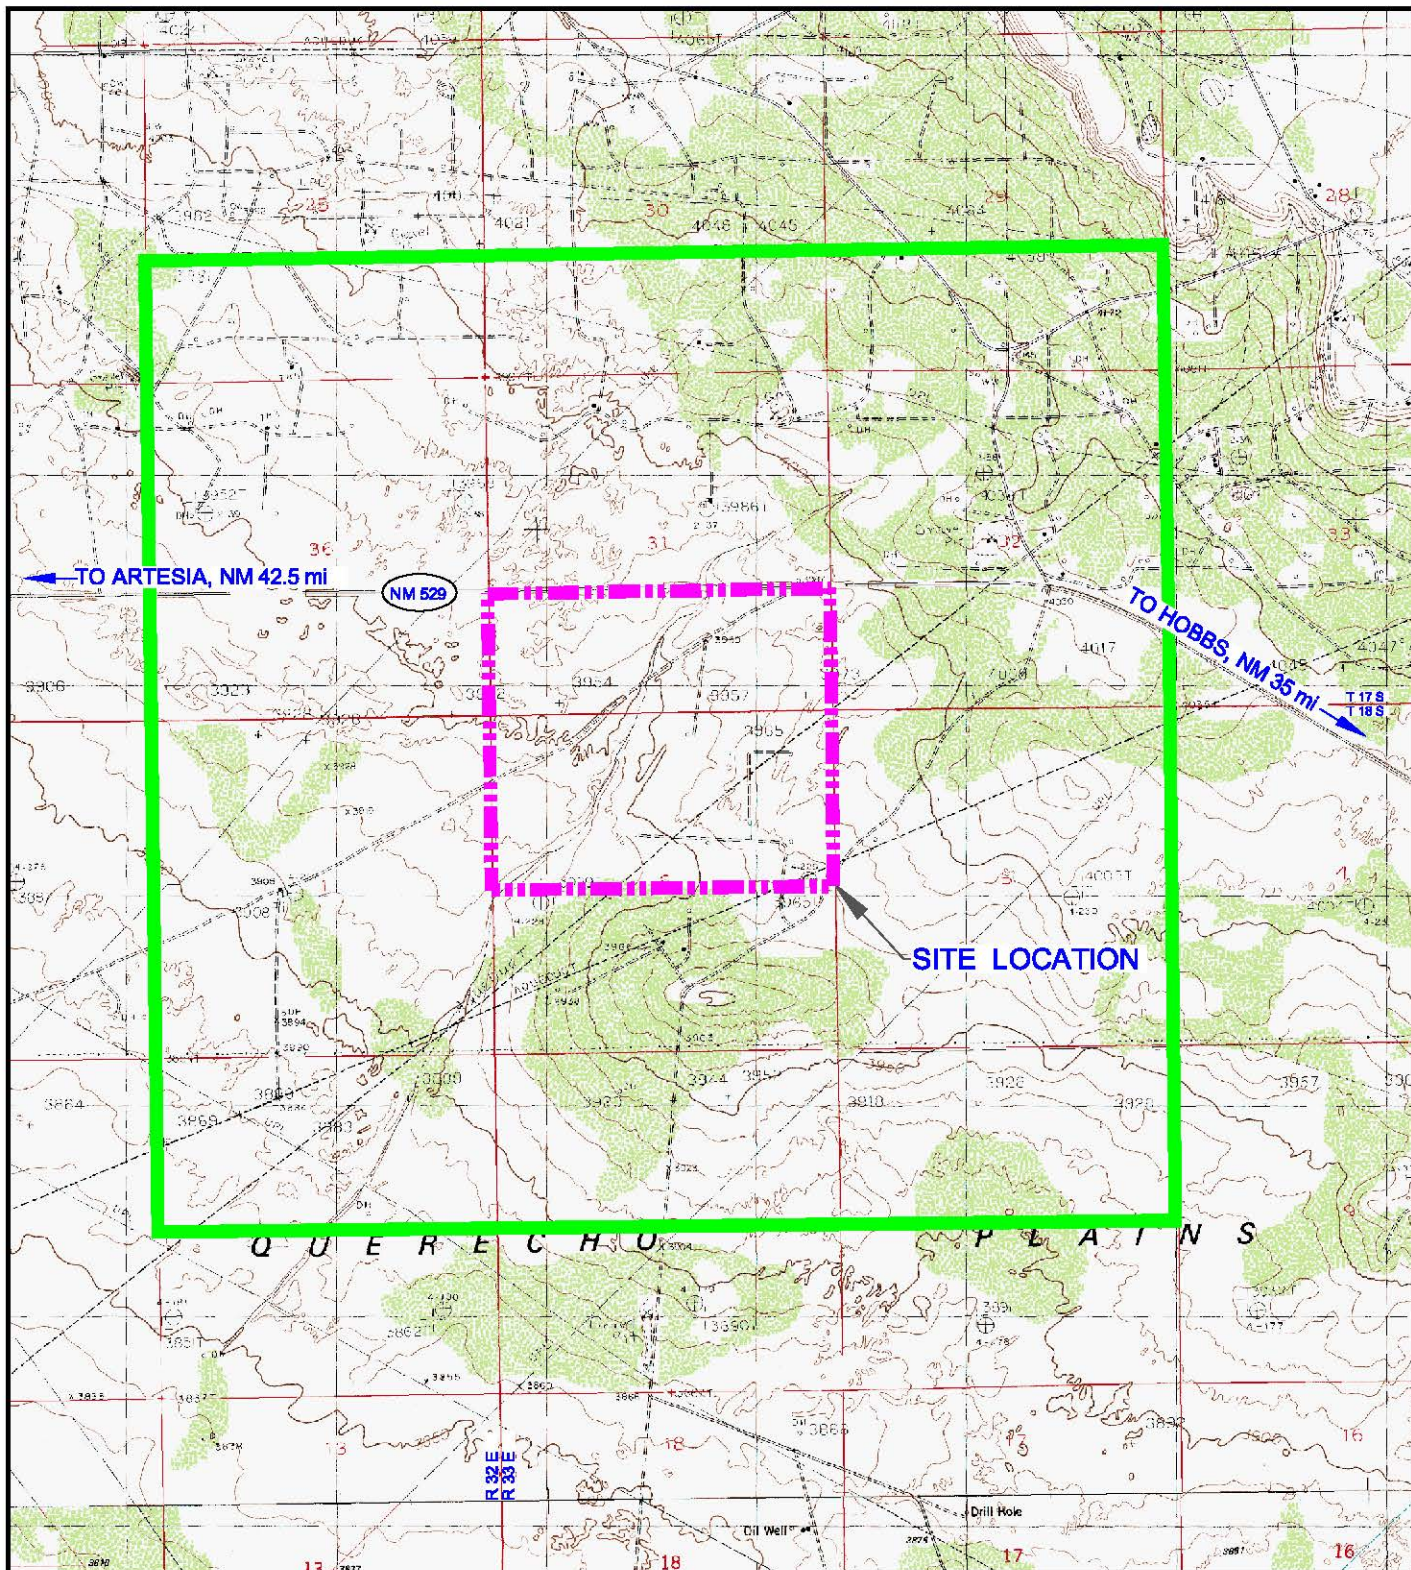


LEGEND

- - - - - SITE BOUNDARY
- 1 MILE OFFSET FROM SITE

MAP REFERENCE:
LAGUNA GATUNA NW 1984,
MALJAMAR 1985 PROVISIONAL EDITION,
GREENWOOD LAKE 1985 PROVISIONAL EDITION, AND
DOG LAKE 1985 PROVISIONAL EDITION,
USGS 1:24000, 7.5 MINUTE SERIES, TOPOGRAPHIC MAPS

Drawing: P:\acsd 2003\542.01.01\RAI 1\SITE LOC MAP.dwg
Date/Time: Jun. 12, 2014-12:59:32 ; LAYOUT: A (P)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2014



SITE LOCATION MAP

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-887-8990
Fax: 505-887-8991

| | | |
|------------------|----------------------------|----------------------|
| DATE: 08/03/2014 | CAD: SITE LOC MAP.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: DRT | FIGURE II.8.1 |
| APPROVED BY: IKG | ge@gordonenvironmental.com | |

1.3 Facility Description


The 562-acre tract is intersected by a drainage feature that will be excluded from development, which includes minimum 250 foot (ft) from the centerline setbacks and totals 67 acres \pm . The DNCS Facility will include two main components; a liquid oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm); totaling 495 acres \pm . Oil field wastes are anticipated to be delivered to the DNCS Facility from oil and gas exploration and production operations in southeastern NM and west Texas. The Site Plan provided as **Figure II.8.2** identifies the locations of the Processing Area and Landfill facilities. The proposed facilities will be developed in four primary phases; which are described in the Operations, Inspection, and Maintenance Plan (**Volume II.1**).


2.0 VADOSE ZONE MONITORING NETWORK


The proposed vadose zone monitoring system for the DNCS Facility is designed to provide for earliest possible detection of potential fluid releases from the Landfill. The hydrogeologic setting described in **Attachment II.8.A** provides the detailed rationale for establishing the vadose zone monitoring network for the site. In summary, the vadose zone monitoring wells (VWs) will be positioned such that downgradient wells are located downslope on the mapped upper redbed surface (i.e., Triassic Chinle) to the west of the Facility, and upgradient wells will be placed upslope on the redbed surface near the southeast corner and along the east boundary of the Facility (**Figure II.8.2**). The redbed structure map provided as **Figure II.8.3** presents a detailed depiction of the terrain on the redbed surface at the Facility; as well as a high confidence level that the proposed downgradient VWs are positioned directly downslope from the proposed waste disposal area in the zone most appropriate for detection of a potential release.

2.1 Monitoring Well Locations

Figure II.8.4 depicts the location of the proposed vadose zone monitoring network designed specifically to address both the known slope of the redbed surface, and the locations of the planned leachate collection sumps for the Landfill. The leachate collection sumps represent the most downgradient termini of the leachate collection system; are the deepest penetrations of the surface deposits; and are vertically most proximate to the redbed surface (e.g., 15 – 30 ft). In addition, the individual disposal cell sumps are the locations with the greatest potential for leachate head development due to their downgradient positions.

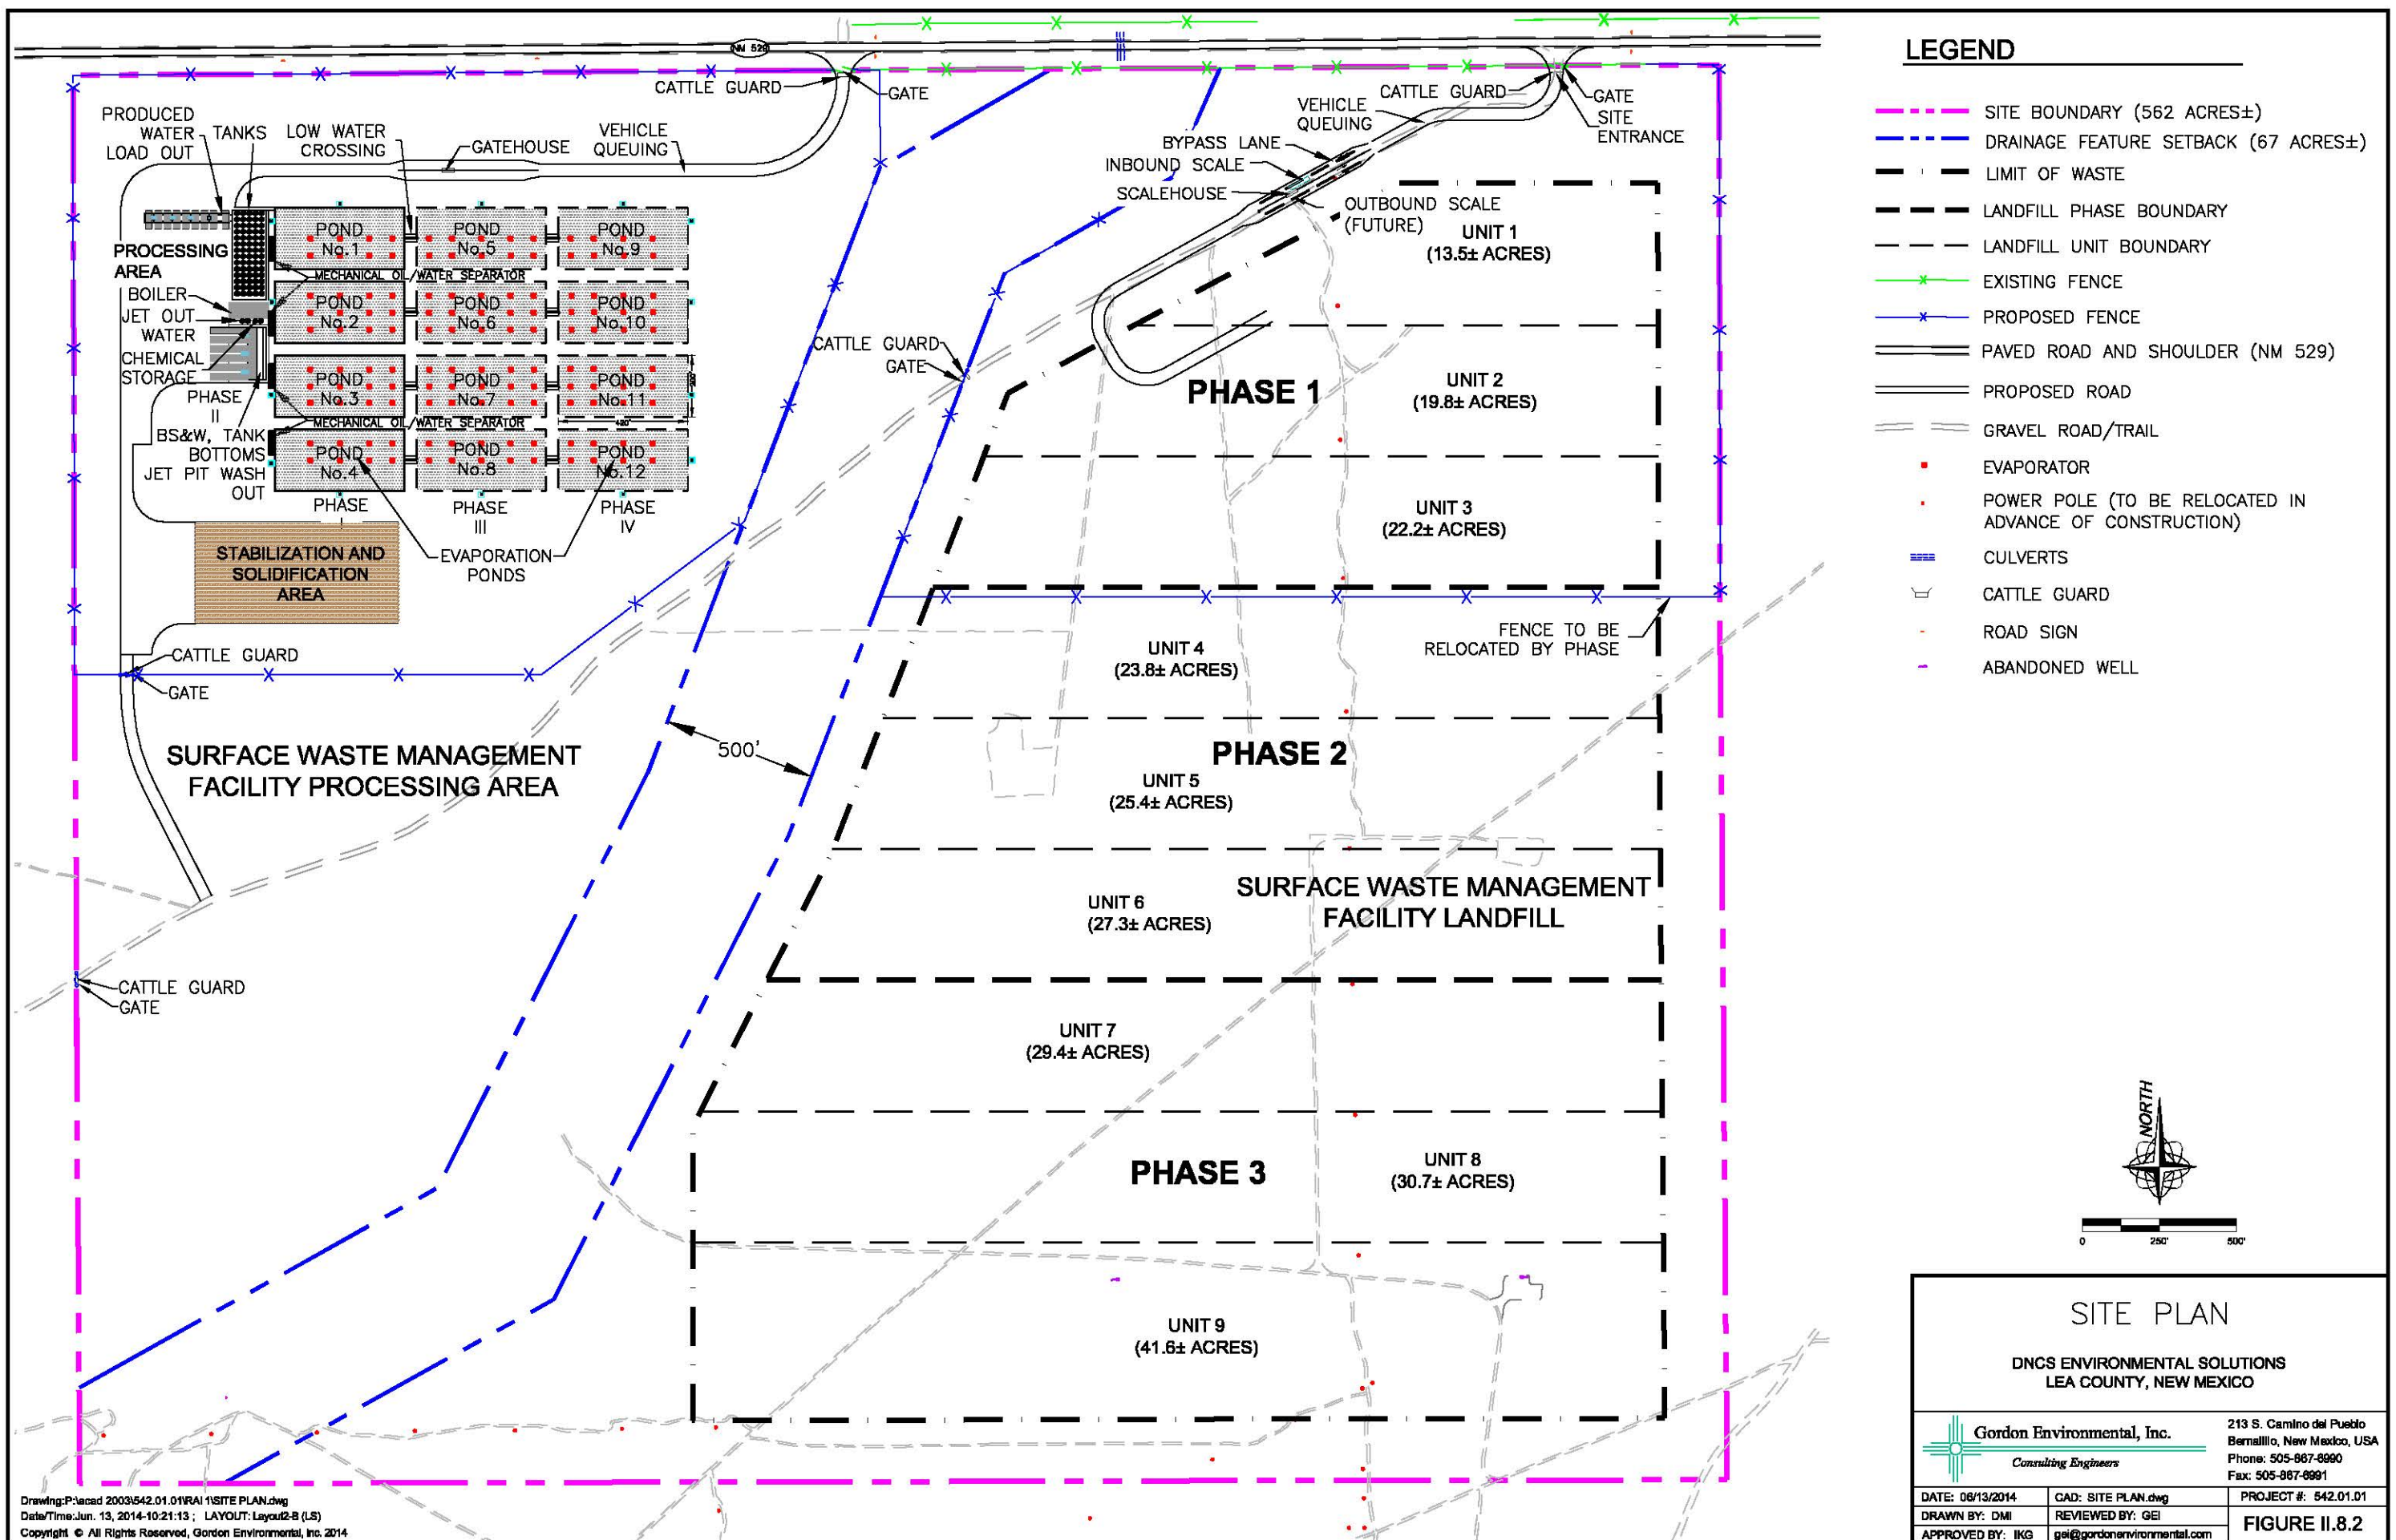

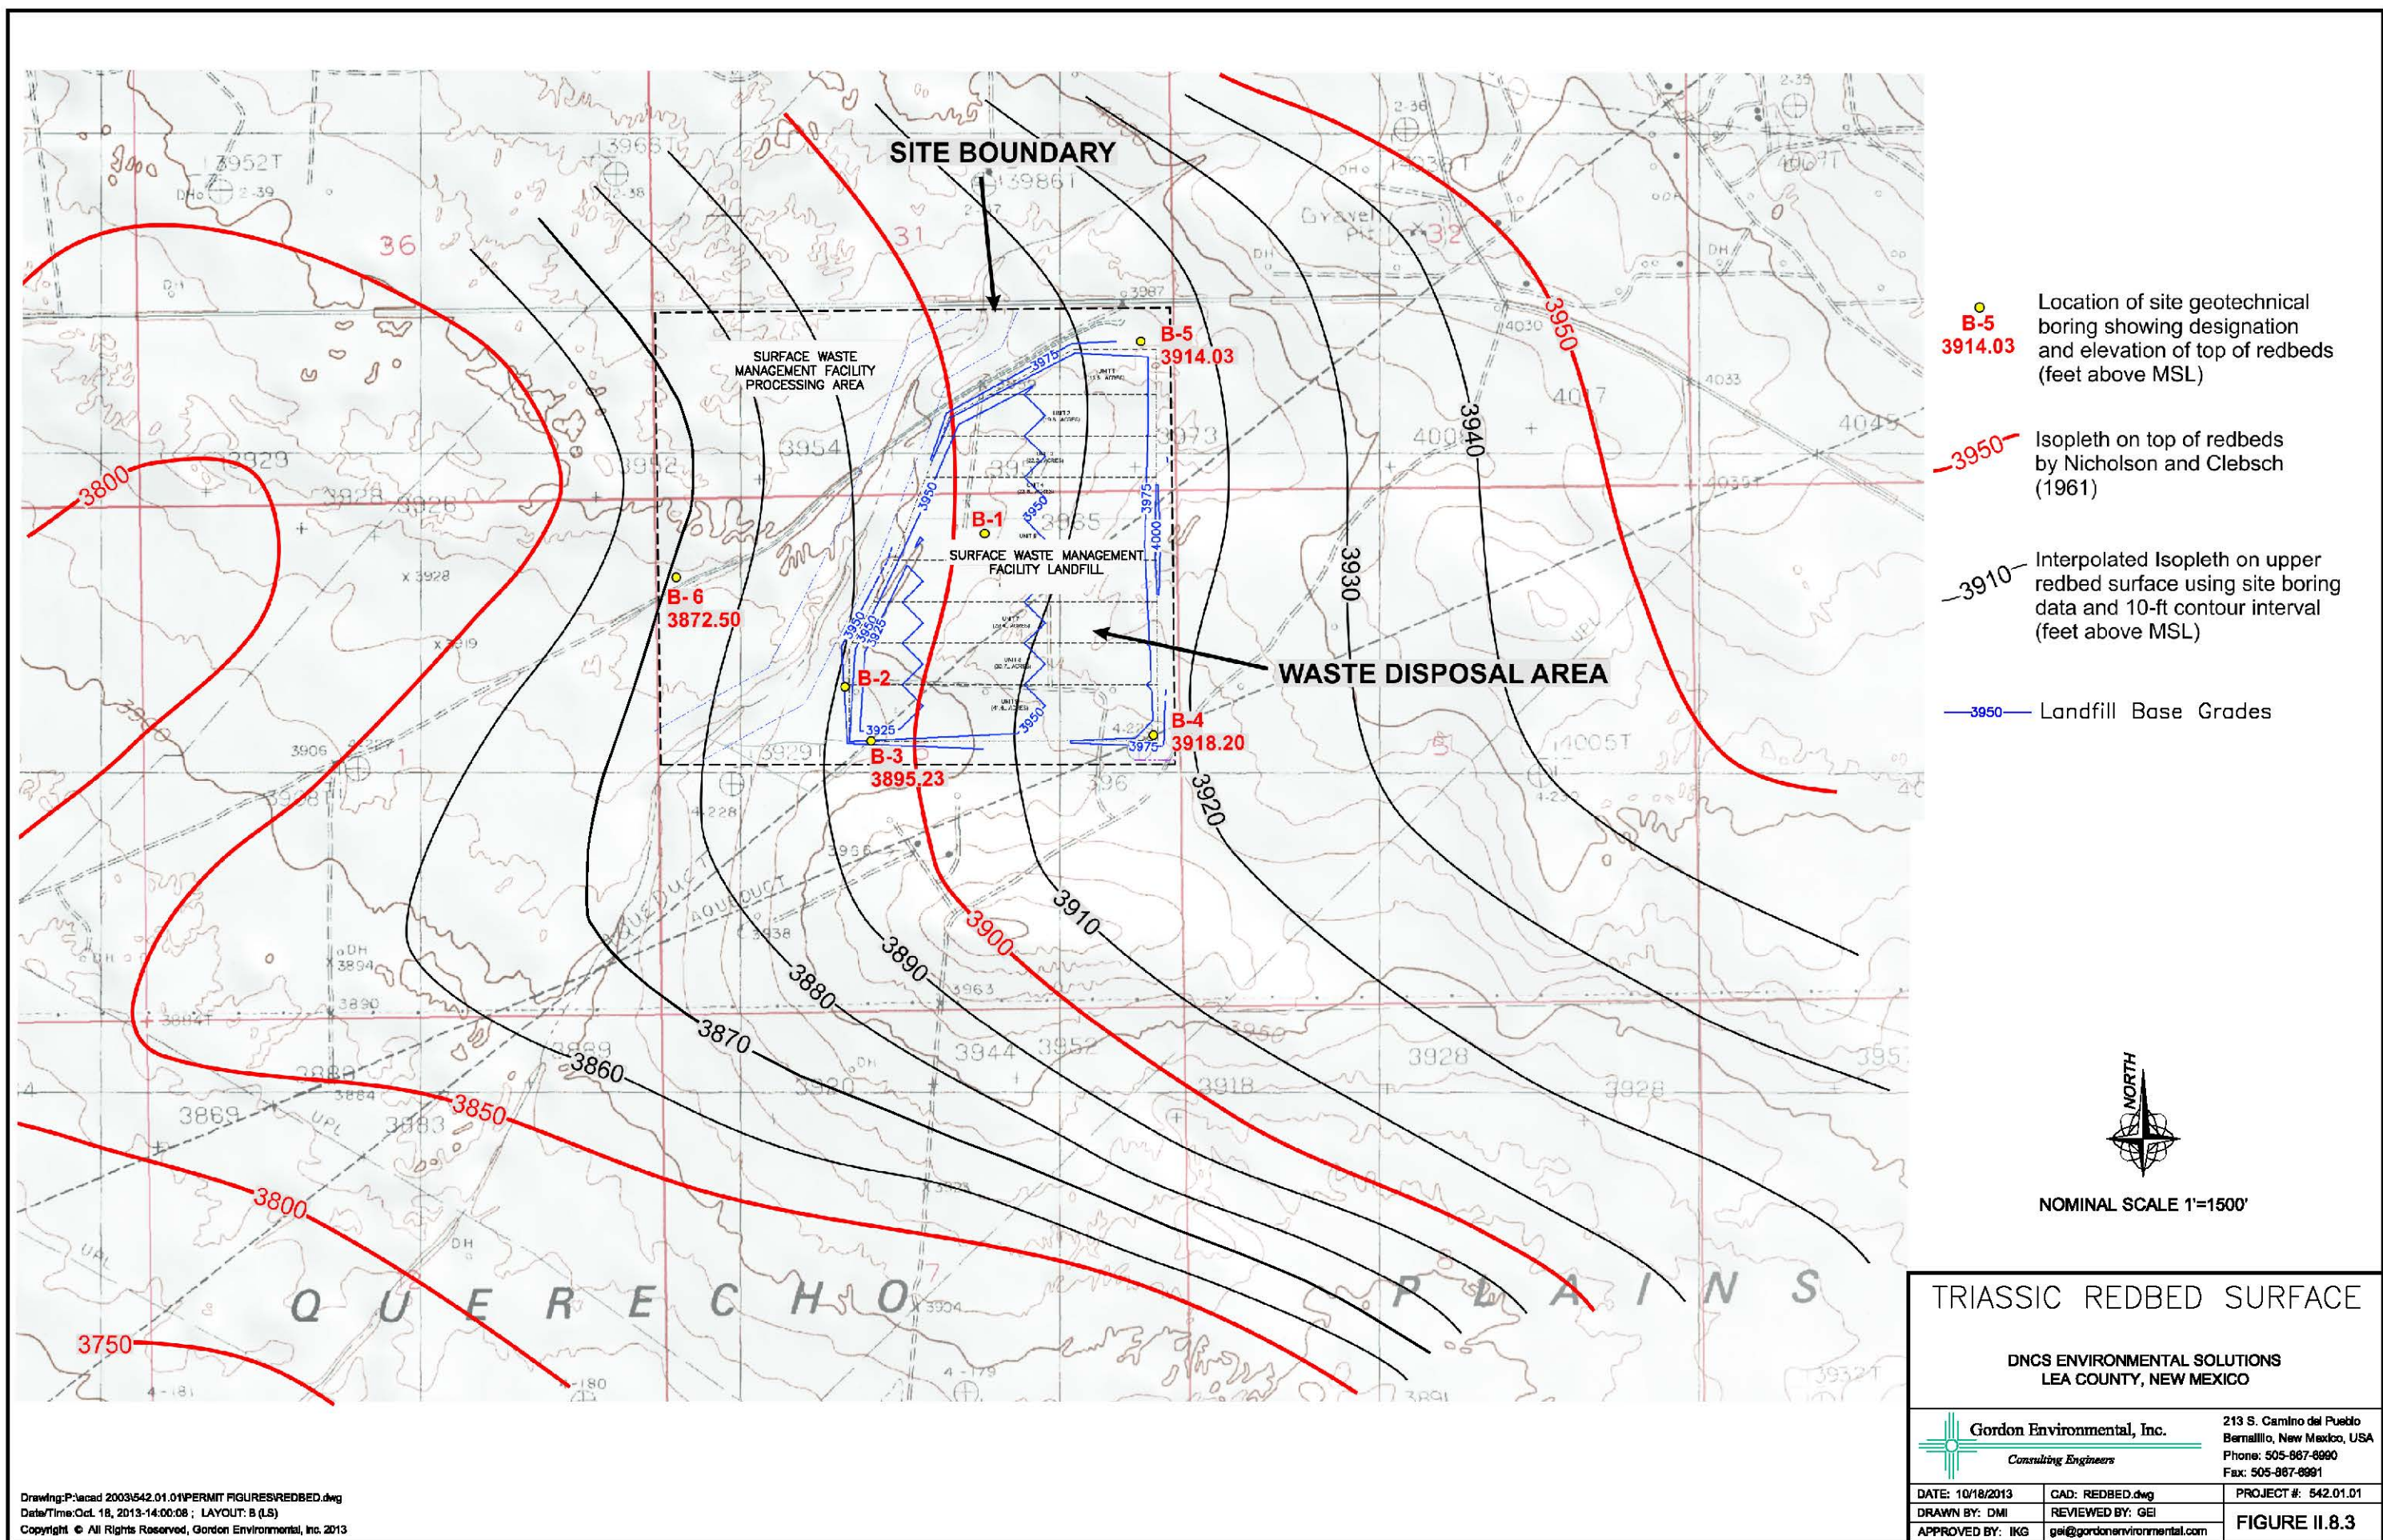

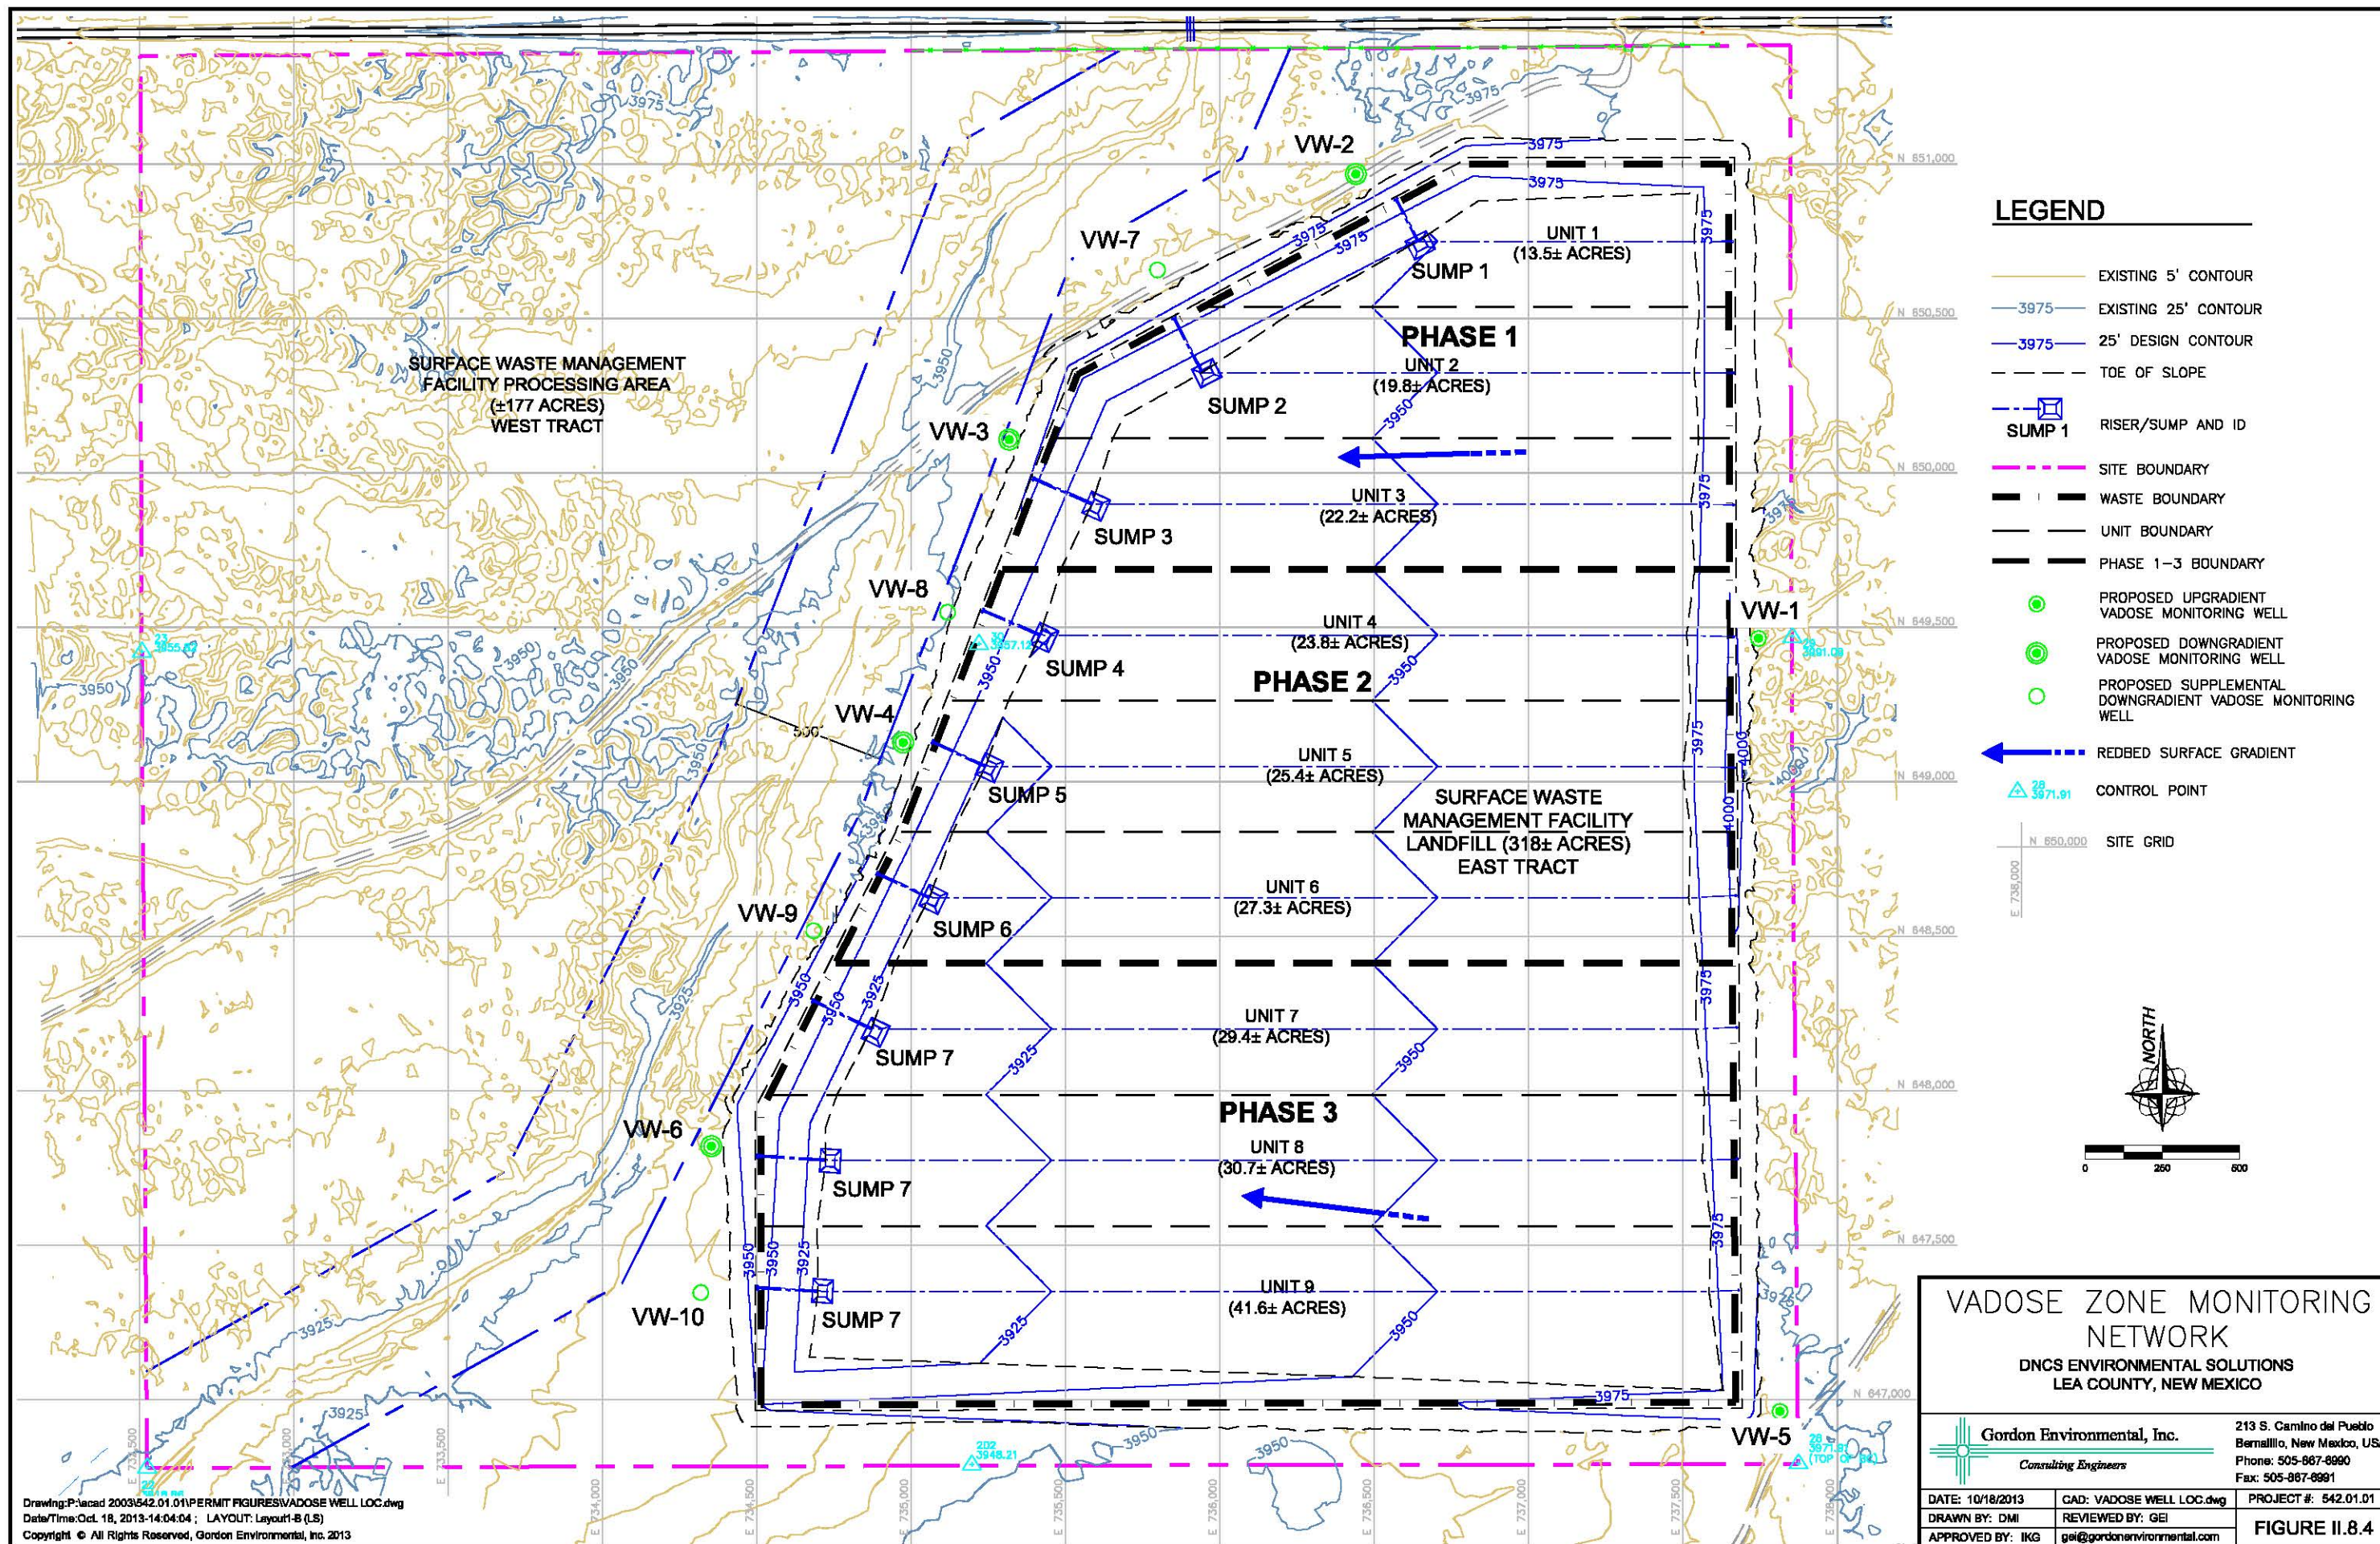

Drawing: P:\acad 2003\542.01.01\PERMIT FIGURES\VADOSE WELL LOC.dwg
Date/Time: Oct. 18, 2013-14:04:04; LAYOUT: Layout1-B (LS)
Copyright © All Rights Reserved, Gordon Environmental, Inc. 2013

The monitoring network strategy consists of the following elements, which are designed to correlate with the Landfill site development sequence shown in **Figure II.8.4**:

1. Following permitting, and prior to Landfill development, wells VW-1, VW-2, and VW-3 will be installed to evaluate ambient conditions; and will be constructed in accordance with the specifications listed in Section 2.2. Well VW-1 will serve as the upgradient monitoring point for Phase 1 operations; and the northern portion of Phase 2 operations. Wells VW-2 and VW-3 will be positioned as “sentinel” downgradient wells for Phase 1 (i.e., Units 1-3), and are specifically located adjacent to Sumps 1 and 3 based on the logic discussed above.
2. Downgradient well VW-4 will be installed prior to the development of Phase 2 (i.e., Units 4-6) in order to evaluate pre-construction conditions; and is deliberately positioned adjacent to Sump 5 for central Unit 5. Well VW-5 will be installed prior to the development of Phase 3, and will serve as the general upgradient monitoring point for all future Landfill development. Well VW-6 is the downgradient sentinel well for Phase 3, and will be installed prior to development of disposal Units 7-9.
3. Shown on **Figure II.8.4** are four additional downgradient monitoring points (i.e., wells VW-7 through VW-10) that may be added incrementally dependent upon monitoring results from the primary network (i.e., wells VW-1 through VW-6). These future wells will be installed to the same specifications prescribed in Section 2.2; and the well locations may be adjusted in consultation with OCD.

2.2 Well Drilling and Completion


Prior to installation of the vadose zone monitoring wells, drilling permits will be obtained from the New Mexico Office of the State Engineer (NMOSE). The vadose zone monitoring wells will be installed using hollow-stem auger drilling methods; and no fluids will be introduced into the borings during drilling. Undisturbed, depth-referenced samples of penetrated sediments will be collected on at least 5-ft intervals using split-spoon sampling equipment. Drive blow counts will be logged during each sampling interval to allow precise determination of the upper redbed surface in each boring; which has typically been well-defined during other subsurface investigations. A qualified hydrogeologist will be present on-site during drilling activities; and will prepare detailed descriptions of the lithology, texture, sorting, rounding, color, and degree of lithification and moisture content of each sample and stratigraphic unit that is penetrated.

Although split-spoon sampling offers ample opportunity to identify saturated sediments with a high degree of confidence, each boring will be further evaluated for the presence of free water. Upon reaching total depth, the drilling rig will be placed on standby for a minimum of two hours, during which time the inside of the augers will be sounded to check for the potential for accumulating fluid.

The vadose zone monitoring wells will be constructed in accordance with the specifications set forth in **Table II.8.1**, and the well detail sheet provided as **Figure II.8.5**:

TABLE II.8.1
Vadose Zone Monitoring Well Installation Specifications
DNCS Environmental Solutions

- The well borehole will be drilled a minimum of 4 inches (in) larger than the casing diameter to allow for the emplacement of the well casing and annular space materials.
- Each boring will be advanced approximately 3 ft into the indurated Triassic redbed.
- Care will be taken not to introduce contamination to the well, i.e., all tools will be decontaminated prior to drilling the borehole.
- Each well will be constructed with 4-in inside diameter (ID) Schedule 40 (SCH 40) polyvinylchloride (PVC) flush-joint casing equipped with a threaded end cap.
- The well casing will extend from the bottom of the borehole to at least 3 ft above ground surface.
- The well casing will be constructed with a 10-ft length of 0.010-in slotted well screen. The well screen will be positioned with the lowermost portion extending approximately 3 ft below the detected upper redbed surface and the upper portion extending approximately 7 ft into the overlying alluvium. Casing centralizers will be placed at the top and bottom of the screened interval as shown on **Figure II.8.5**.
- The remaining well casing will be constructed with solid 4-in ID SCH 40 PVC flush-joint casing equipped with a venting cap.
- The annular space from the bottom of the borehole to 2 ft above the top of the well screen will be packed with 10-20 grade silica sand.
- A minimum of 1 ft of the annular space above the upper surface of the silica sand will be sealed with hydrated granular bentonite or bentonite chips.
- The annular space above the bentonite seal to 3 ft below ground surface will be sealed with bentonite-cement grout (minimum 2% - 5% bentonite).
- The upper 3 ft of the annular space will be filled with concrete to anchor a steel protective shroud.
- The steel protective shroud shall be minimum 6-inch ID, and will be equipped with a 2-piece cast locking protective cover. The locking protective cover shall be positioned a minimum of 6 in from the top of the PVC well casing to allow for easy access for removal of the PVC vent cap.
- A 4-ft x 4-ft x 6-in-thick concrete pad will be poured around the steel protective shroud. The pad will be radially sloped away from the well to promote stormwater drainage away from the well; and will be protected on each corner by a steel, concrete-filled bollard.
- The top of PVC casing, top of steel shroud, and top of concrete pad of the new monitoring well will be surveyed, referenced to a standard horizontal grid and elevations relative to the site control; and will be subsequently mapped by a licensed surveyor. The location of the well will be determined to within one-tenth of a foot, and the height above sea level at the top of the casing will be determined to within one-hundredth of a foot.
- Well completion data; NMOSE drilling permits and well records; and survey location information will be submitted to OCD in a "Well Completion Report".

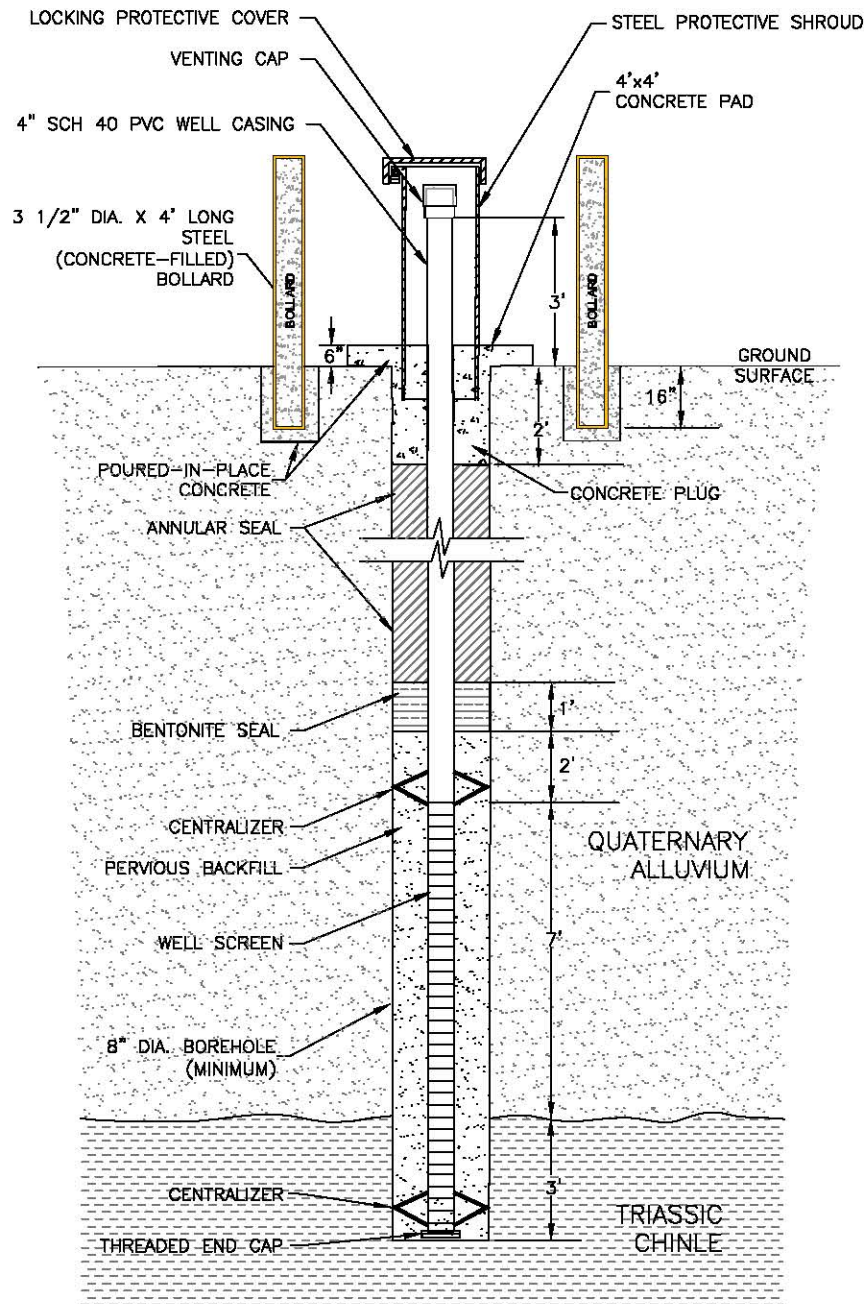

TYPICAL VADOSE ZONE MONITORING WELL

NOT TO SCALE

LEGEND

CASING: 4" DIA. SCH 40 PVC

SCREEN: 4" DIA. 0.010" MACHINE SLOT SCH 40 PVC

PERVIOUS BACKFILL: 10-20 COLORADO® SILICA SAND OR EQUIVALENT

ANNULAR SEAL: NEAT CEMENT WITH 2% TO 5% BENTONITE

NOTE:

SPECIFIC VERTICAL DIMENSIONS FOR EACH NEW WELL WILL BE INCLUDED IN DSE AND OCD SUBMITTALS.

VADOSE ZONE MONITORING WELL CONSTRUCTION DETAIL

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-6990
Fax: 505-867-6991

DATE: 10/18/2013

CAD: VADOSE MW.dwg

PROJECT #: 542.01.01

DRAWN BY: DMI

REVIEWED BY: MJC

APPROVED BY: IKG

gei@gordonenvironmental.com

FIGURE II.8.5

3.0 VADOSE ZONE MONITORING PROGRAM

Evidence of fluids in the VWs should not necessarily be attributed to impacts from the Landfill; and the fluid's origin must be interpreted correctly. For example, reconfiguration of Facility stormwater controls may alter surface water recharge to the subsurface, and it is possible that some liquids may accumulate in a monitoring well from condensation within the well casing. The following sections describe the planned monitoring protocol for the DNCS Facility vadose zone monitoring network.

3.1 Monitoring Schedule

The proposed vadose zone monitoring program will initially include inspection of each well for the presence of fluid in advance of the applicable disposal area construction. After the initial inspection, each VW will be monitored for the presence of free liquids on a monthly basis for a period of 12 months. If the monthly monitoring results continually indicate the absence of fluid, the subject wells will be transitioned to quarterly monitoring. The continued lack of fluids in the VWs may be the subject of future specific approvals by OCD for a reduced monitoring frequency (i.e., semi-annual or annual).

3.2 Monitoring Assessment

Monitoring for the presence of liquid will be performed by lowering a calibrated electronic tape (i.e., water level indicator) that emits an audible signal when a water surface is penetrated. Total well depth measurements will also be recorded with the same electronic tape. **Attachment II.8.B** to this Plan is a typical field information form that may be used for routine vadose zone monitoring purposes.

If the water level indicator shows that free liquids are present in the well casing, an attempt will be made to evacuate the liquid to investigate its origin by lowering a 2-in PVC or Teflon bailer to remove the liquid from the well for sampling/testing purposes. If a liquid sample cannot be retrieved, then the quantity of liquid in the well will be considered *de minimus*; and likely the result of condensation. The same procedures will be used to check for liquid and evacuate (as necessary or if possible) for each subsequent monitoring event.

If a sufficient quantity of liquid is available to allow sample collection, the liquid will be field-screened for specific conductance (SC), pH, and temperature (i.e., field parameters). In addition, initial sampling will include independent qualified commercial laboratory analysis for the parameters identified in **Table II.8.2**. The initial field and laboratory data will be evaluated to determine if the water encountered is the result of surface water infiltration; or potential impacts from the Landfill. These data will be considered “background values”.

If the initial analyses indicate that no impact from the Landfill is evident, then routine monitoring of field parameters will continue on either a monthly or quarterly basis, as applicable for wells with a measureable water column. If subsequent monitoring indicates elevated measurements of the field parameters relative to the initial measurements (i.e., greater than 5 times background values), additional samples will be collected for laboratory analyses, and the data will be evaluated in accordance with the following Section to determine if a release from the Landfill is possible.

3.3 Monitoring Data Evaluation

If the field parameter measurements indicate that a well shows evidence of non-natural constituents, OCD will be notified within 48 hours and verification re-sampling (VRS) for the parameters listed in **Table II.8.2** will be conducted within 2-weeks. If the VRS analytical results indicate that a potential Landfill release may have occurred, within 90 days of the finding, fluid samples from each active Landfill sump will be collected and analyzed for the parameters listed in **Table II.8.2** for comparative evaluation with the VRS results. This data evaluation process is fundamental in determining if the potential source of an identified change is from the monitored Facility, an alternative on-site or off-site source, natural variability, an error in the sampling and analysis process, etc. The DNCS Facility will work with OCD to devise an appropriate scope of work for assessing water quality changes.

If the comparative evaluation indicates that the well may contain non-naturally occurring fluids, the DNCS Facility will submit an Action Plan to OCD within 30-days of the finding detailing the course of action to investigate further the potential release; and/or complete any mitigation measures as appropriate. If the comparative evaluation results indicate that no impacts have occurred, the monitoring data will be maintained as part of the Facility Operating Record, and submitted with annual vadose zone monitoring data for the Facility.

TABLE II.8.2
Vadose Zone Monitoring Parameters
DNCS Environmental Solutions

Field Parameters

- | | |
|------------------------|------------------|
| • Specific Conductance | • Temperature |
| • pH | • Depth to Water |
| • Total Well Depth | |

Major Cations

- | | |
|-------------|-------------|
| • Calcium | • Iron |
| • Magnesium | • Potassium |
| • Sodium | |

Major Anions

- | | |
|----------------|---------------|
| • Fluoride | • Chloride |
| • Nitrate as N | • Phosphorous |
| • Sulfate | |

RCRA Metals

- | | |
|------------|------------|
| • Arsenic | • Lead |
| • Barium | • Mercury |
| • Cadmium | • Selenium |
| • Chromium | • Silver |

Organic Compounds

- | | |
|-----------|----------------|
| • Benzene | • Ethylbenzene |
| • Toluene | • Xylenes |

Additional Parameters

- | | |
|--------------------------------|--------------------------------------|
| • Total Dissolved Solids (TDS) | • Total Petroleum Hydrocarbons (TPH) |
|--------------------------------|--------------------------------------|

Concurrent with each vadose zone monitoring event, methane monitoring will be performed in each active well using an electronic, intrinsically safe portable gas analyzer, or equivalent instrument. Methane concentrations will be expressed either as percent by volume in air or as a percent of the lower explosive limit (LEL) for methane; and will be recorded on the form provided as **Attachment II.8.B**. In the event that methane concentrations exceed regulatory limits, the DNCS Facility will work with OCD to devise an appropriate scope of work for assessing the methane monitoring results.

**APPLICATION FOR PERMIT
DNCS ENVIRONMENTAL SOLUTIONS**

**VOLUME II: FACILITY MANAGEMENT PLANS
SECTION 8: VADOSE ZONE MONITORING PLAN**

**ATTACHMENT II.8.A
PROPOSAL FOR VADOSE ZONE MONITORING**

ATTACHMENT II.8.A
Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico

August 2013
Updated November 2013

Prepared By:

Golder Associates Inc.
5200 Pasadena Ave NE, Suite C
Albuquerque, NM 87113
Contact: Mr. Clay Kilmer
E-mail: ckilmer@golder.com

Prepared With:

Gordon Environmental, Inc.
213 S. Camino del Pueblo
Bernalillo, NM 87004
Contact: Mr. Charles Fiedler, P.E.
E-mail: cfiedler@gordonenvironmental.com

Submitted To:

Oil Conservation Division
1220 South St. Francis Drive
Santa Fe, NM 87505
Contacts: Mr. Brad Jones and Mr. Glenn von Gonten
E-mails: brad.a.jones@state.nm.us
Glenn.vongonten@state.nm.us

ATTACHMENT II.8.A
Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico

Table of Contents

| | | |
|-----|--|----|
| 1.0 | INTRODUCTION | 1 |
| 1.1 | Site Location | 1 |
| 1.2 | Purpose | 1 |
| 2.0 | HYDROGEOLOGIC SETTING | 3 |
| 2.1 | Groundwater Occurrence and Site Conditions | 6 |
| 3.0 | PROPOSED VADOSE ZONE MONITORING PROGRAM | 10 |
| 3.1 | Proposed Monitoring Well Locations | 11 |
| 3.2 | Proposed Well Drilling and Completion | 12 |
| 3.3 | Proposed Monitoring Program | 13 |
| 4.0 | LIST OF REFERENCES | 13 |

List of Figures

| Figure No. | Title | Page |
|-------------------|---|-------------|
| 1 | PHYSIOGRAPHY OF SOUTHERN LEA COUNTY AND EASTERN EDDY COUNTY, NEW MEXICO | 14 |
| 2 | SURFACE GEOLOGY AND WELL LOCATIONS | 15 |
| 3 | HYDROGEOLOGIC CROSS SECTION THROUGH THE DNCS SITE | 16 |
| 4 | TRIASSIC REDBED SURFACE | 17 |
| 5 | VADOSE ZONE MONITORING NETWORK | 18 |
| 6 | VADOSE ZONE MONITORING WELL COMPLETION DETAIL | 19 |

List of Tables

| Table No. | Title | Page |
|------------------|--|-------------|
| 1 | SOILS LABORATORY ANALYSES SUMMARY | 4 |
| 2 | RECORDS OF WELLS WITHIN 2 MILES OF THE DNCS SITE | 8 |

List of Attachments

| Attachment No. | Title |
|-----------------------|---|
| A-1 | LOGS OF GEOTECHNICAL BORINGS AT THE DNCS SITE |
| A-2 | SELECTED WELL DATA FROM WELLS IN THE VICINITY OF THE DNCS SITE (GEOHYDROLOGY ASSOCIATES, 1978) |
| A-3 | NEW MEXICO OFFICE OF THE STATE ENGINEER WELL RECORDS FOR WELLS IN THE VICINITY OF THE DNCS SITE |

**Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico**

1.0 INTRODUCTION

DNCS Environmental Solutions (DNCS Facility) is a proposed Surface Waste Management Facility for oil field waste processing and disposal services. The proposed DNCS Facility is subject to regulation under the New Mexico Oil and Gas Rules, specifically 19.15.36 NMAC, administered by the Oil Conservation Division (OCD). The Facility is designed in compliance with 19.15.36 NMAC, and will be constructed and operated in compliance with a Surface Waste Management Facility Permit issued by the OCD. The Facility is owned by, and will be constructed and operated by, DNCS Properties, LLC.

1.1 Site Location

The DNCS site is located approximately 10.5 miles east of the US 82/NM 529 intersection and 6.3 miles southeast of Maljamar in unincorporated Lea County, New Mexico (NM). The DNCS site is comprised of 562-acre \pm tract of land located south of NM 529 in portions of Section 31, Township 17 South, Range 33 East; and in the northern half of Section 6, Township 18 South, Range 33 East, Lea County, NM. Site access will be provided via the south side of NM 529. A portion of the 562-acre tract is a drainage feature that will be excluded from development. The drainage feature includes a 500-ft buffer zone which totals 67 acres \pm . The DNCS Facility will include two main components; an oil field waste Processing Area (177 acres \pm), and an oil field waste Landfill (318 acres \pm); totaling 495 acres \pm .

1.2 Purpose

Siting criteria for Surface Waste Management Facilities per 19.15.36.13.A(1) NMAC require that the minimum depth to groundwater below the lower limit of waste is ≥ 100 feet (ft).

The Oil and Gas Rules include requirements for groundwater monitoring at facilities where “fresh groundwater” exists, unless “otherwise approved by the division” (19.15.36.14.B NMAC). Fresh groundwater is defined as groundwater that contains less than 10,000 milligrams per liter (mg/L) of total dissolved solids (TDS).

The DNCS site is located in an area where few shallow groundwater resources are known to exist. Information obtained from six borings that were recently advanced on the tract provide adequate demonstration that the minimum depth to the shallowest groundwater bearing zone on the property exceeds 150 ft below land surface; and is more than 100 ft below projected Landfill base grade levels. The northwest portion of the site is planned for oil field waste processing, which has been specifically demonstrated to possess in excess of the required 50-ft vertical setback to groundwater. Based upon projected data from wells in the vicinity, it is anticipated that the shallowest water bearing zones on the DNCS tract are on the order of six hundred ft below projected waste cell base grades, and are vertically separated from the proposed Facility by more than five hundred ft of dense non water-bearing shale.

The proposed Facility design includes double HDPE lining of Landfill waste cells with an intervening protective geonet leak detection layer, as well as installation of equipment and operational provisions for leachate monitoring and collection. Based upon the well documented shallow stratigraphy in the vicinity of the proposed Facility, it is anticipated that if leakage were to occur at the Facility, the leachate would migrate vertically through unconsolidated alluvium and would potentially pool on the upper surface of laterally extensive dense shale redbeds (i.e., Triassic Chinle) that are demonstrated to be present at approximately 50 ft below grade at the site. Available subsurface stratigraphic information for the site and surrounding area indicates that any potential leakage would migrate downslope above the alluvium-shale interface to the west or northwest.

As the proposed Facility design includes double HDPE lined waste cells and provisions for leak detection and leachate extraction, and since the Facility is underlain by laterally extensive dense shale and projected depth to groundwater is great, vadose zone monitoring at the shale-alluvium interface is proposed as the most effective mechanism for detection monitoring for the site. Due to the exceptional anticipated depth to groundwater at the site, as well as the low hydraulic conductance of the shale bedrock, it is anticipated that properly positioned and

completed vadose zone monitoring wells (VWs) at the site would detect leakage from the Facility long before groundwater monitoring wells at great depth (i.e., > 500 ft) could; and thus, would provide a greater level of protection to any groundwater resources present at the Facility. **Table 1** provides the results of site-specific soils laboratory testing, which demonstrate the dramatic change in soils characteristics between the near-surface (i.e., 0-50 ft) coarse-grained deposits; and the thick and dense impermeable redbed deposits below. This site-specific characterization of the onsite soils is entirely consistent with other focused site studies in the area; as well as the documented regional database.

Similar strategies have been deployed nationally where groundwater exists at great depth, and there are intervening zones of dense and impermeable soils. In New Mexico, this technology, which consists of a two-phase vadose zone monitoring approach (i.e., double-liner with leak detection coupled with sentinel (wells) has been effectively implemented at a minimum of three Subtitle D Municipal Solid Waste Landfills approved by the New Mexico Environment Department, including one in Lea County.

The following sections of this submittal provide specific descriptions of the subsurface stratigraphy and water-bearing zones in the vicinity of the proposed Facility, as well as proposed design, installation methods and operational strategy for vadose zone monitoring at the site.

2.0 HYDROGEOLOGIC SETTING

Details regarding the hydrogeology of the DNCS site and region will be included as Volume IV.2 of the DNCS Application for Permit. The DNCS site is located in western Lea County, and is situated in the Upper Pecos-Black watershed (United States Geological Survey [USGS] cataloging Unit 1306001), near the western boundary of the Monument-Seminole Draws watershed (USGS cataloging unit 12080003). The physiography and hydrogeology of the area are described by Nicholson and Clebsch (1961) and the physiography of southern Lea County and eastern Eddy County are shown in **Figure 1** (Nicholson and Clebsch, 1961 and Kelly, 1979). The boundary between the Upper Pecos-Black and Monument-Seminole

TABLE 1
Soils Laboratory Analyses Summary
DNCS Environmental Solutions

| Sample Number ¹ | Sample Depth (ft bgs) | USCS Class ² | Grain Size Distribution | | | Atterberg Limits ³ LL - PI | Natural Dry Density (PCF) | Natural Moisture ⁴ (%) | Standard Proctor | | Permeability (cm/sec) | Porosity (%) |
|----------------------------|-----------------------|-------------------------|-------------------------|--------------|---------------|--|---------------------------|-----------------------------------|------------------------|----------------------|-----------------------|--------------|
| | | | Pass #4 (%) | Pass #40 (%) | Pass #200 (%) | | | | Max. Dry Density (PCF) | Optimum Moisture (%) | | |
| B3-5 | 5-6.5 | SP-SC | 100 | 98 | 9.0 | | | 2.8 | | | | |
| B3-20 | 20-21.5 | SC | 100 | 93 | 13.0 | | | 4.7 | | | | |
| B3-35SS | 35-36.5 | SC | 100 | 97 | 14.0 | | | 4.6 | | | | |
| B3-35CC | 35-40 | SP-SC | 99 | 95 | 11.0 | | | 2.2 | 121.1 | 11.7 | | |
| B3-50.25BR | 50.25-50.75 | SC | 100 | 94 | 47.1 | 32-18 | 112.3 | 7.6 | | | 9.72E-07 | 32.1 |
| B3-65 | 65-66 | SC | 100 | 77 | 18.0 | | | 11.6 | | | | |
| B3-85 | 85-90 | CL | 100 | 88 | 82.1 | 38-24 | 112.3 | 3.3 | | | 1.01E-07 | 32.1 |
| B3-115 | 115-120 | SC | 100 | 66 | 21.0 | | | 12.8 | | | | |
| B3-130 | 130-135 | SC | 100 | 62 | 20.0 | | | 8.7 | | | | |
| B3-145 | 145-150 | SC | 100 | 75 | 31.0 | | | 7.4 | | | | |
| B4-0 | 0-5 | SP-SC | 99 | 92 | 8.0 | | | 11.4 | | | | |
| B4-15 | 15-20 | SP-SC | 100 | 98 | 7.3 | | | 6.8 | | | | |
| B4-30CC | 30-35 | SP-SC | 100 | 98 | 7.9 | | | 4.8 | 119.9 | 12.1 | | |
| B4-30SS | 30-31.5 | SP-SC | 100 | 98 | 8.9 | | | 4.9 | | | | |
| B4-55BR | 55-55.75 | CL | 100 | 88 | 85.0 | 42-19 | 100.8 | 9.7 | | | 7.89E-07 | 39.1 |
| B4-80 | 80-85 | SC | 100 | 80 | 27.0 | | | 13.9 | | | | |
| B4-100 | 100-105 | SC | 100 | 83 | 34.0 | | | 13.8 | | | | |
| B4-120 | 120-125 | CL | 100 | 95 | 93.7 | 38-23 | 100.9 | 2.9 | | | | 39.0 |
| B4-145 | 145-150 | SC | 100 | 83 | 34.0 | | | 7.9 | | | | |

Notes:

Blank field indicates test not conducted

¹ See **Figure 5** for locations of borings and **Attachment A-1** for boring logs.

² Unified Soil Classification System: SM = silty sand; SP = poorly graded sand; SC = clayey sand; ML = low-plasticity silt; CL = low-plasticity clay; CH = high-plasticity clay

³ LL = liquid limit; PI = plasticity index; NV = non viscous; NP = non plastic

⁴ Gravimetric basis

R = remolded sample; I = in-situ sample; (DS) = direct shear test on sample X

Combined Samples used for Standard Proctor on Boreholes 3,4,5

For Porosity a Specific Gravity of 165.4 PCF was used; where Porosity = $1 - (\text{Natural Dry Density} / \text{Specific Gravity})$

TABLE 1
Soils Laboratory Analyses Summary
DNCS Environmental Solutions

| Sample Number ¹ | Sample Depth (ft bgs) | USCS Class ² | Grain Size Distribution | | | Atterberg Limits ³ LL - PI | Natural Dry Density (PCF) | Natural Moisture ⁴ (%) | Standard Proctor | | Permeability (cm/sec) | Porosity (%) |
|----------------------------|-----------------------|-------------------------|-------------------------|--------------|---------------|--|---------------------------|-----------------------------------|------------------------|----------------------|-----------------------|--------------|
| | | | Pass #4 (%) | Pass #40 (%) | Pass #200 (%) | | | | Max. Dry Density (PCF) | Optimum Moisture (%) | | |
| B5-10 | 10-15' | SC | 98 | 87 | 13.0 | | | 4.2 | | | | |
| B5-25 | 25-30 | SP-SC | 98 | 92 | 11.0 | | | 0.7 | | | | |
| B5-30CC | 30-35 | SP-SC | 100 | 97 | 8.8 | | | 4.3 | 123.3 | 9.9 | | |
| B5-30SS | 30-31.5 | SP-SC | 99 | 88 | 11.0 | | | 4.8 | | | | |
| B5-45 | 45-50 | SP-SC | 100 | 85 | 7.2 | | | 6.1 | | | | |
| B5-70SS | 70-70.5 | CL | 100 | 93 | 84.4 | 41-22 | 90.6 | 13.1 | | | | 45.2 |
| B5-80 | 80-85 | SC | 100 | 66 | 19.0 | | | 12.2 | | | | |
| B5-90 | 90-95 | SC | 100 | 69 | 22.0 | | | 12.5 | | | | |
| B5-105 | 105 | SC | 100 | 67 | 21.0 | | | 14.4 | | | | |
| B5-125 | 125-130 | SC | 100 | 59 | 27.0 | | | 6.6 | | | | |
| B5-145 | 145-150 | CL | 100 | 90 | 85.5 | 36-21 | 107.2 | 8.4 | | | 7.54E-07 | 35.2 |
| B6-0 | 0-5 | SP | 100 | 99 | 3.7 | | | 2.1 | | | | |
| B6-7 | 07-13' | SC | 100 | 93 | 15.0 | | | 7.0 | | | | |
| B6-13 | 13-27 | SC | 88 | 70 | 21.0 | | | 3.5 | | | | |
| B6-20 | 20-40 | SC | 95 | 83 | 14.0 | | | 4.1 | 118.2 | 11.0 | | |
| B6-27 | 27-48 | SC | 97 | 86 | 16.0 | | | 4.0 | | | | |
| B6-60 | 60-75 | SC | 100 | 90 | 32.9 | 25-11 | 106.2 | 3.1 | | | 1.13E-05 | 35.1 |

Notes:

Blank field indicates test not conducted

¹ See **Figure 5** for locations of borings and **Attachment A-1** for boring logs.

² Unified Soil Classification System: SM = silty sand; SP = poorly graded sand; SC = clayey sand; ML = low-plasticity silt; CL = low-plasticity clay; CH = high-plasticity clay

³ LL = liquid limit; PI = plasticity index; NV = non viscous; NP = non plastic

⁴ Gravimetric basis

R = remolded sample; I = in-situ sample; (DS) = direct shear test on sample X

Combined Samples used for Standard Proctor on Boreholes 3,4,5

For Porosity a Specific Gravity of 165.4 PCF was used; where Porosity = $1 - (\text{Natural Dry Density} / \text{Specific Gravity})$

Draws is formed by the Mescalero Ridge (alternately called “the Caprock”), which trends north-south along the Chaves and Lea County line from northwest Lea County approximately to Maljamar, where it turns southeast, passing approximately 1.75 miles east of the DNCS site, continuing southeast past the Texas state line east of Eunice. The Mescalero Ridge is also the boundary between the High Plains province to the east and the Querecho Plains province to the west.

The Mescalero Ridge is the western terminus of the Tertiary Ogallala Formation, which is a thick sequence of unconsolidated to semiconsolidated sand, silt and gravel; which were deposited on an erosional surface incised into Triassic Chinle shale in much of southeastern New Mexico. The Ogallala has been removed by erosion west of Mescalero Ridge and a veneer (generally less than 100 ft) of Quaternary age unconsolidated Ogallala detritus and aeolian sands mantle the Triassic Chinle in this area. Well-cemented sections (i.e., caliche) of the Ogallala Formation are the ledge-forming units of the Caprock bluffs.

The DNCS site is located approximately 1.75 miles west of Mescalero Ridge in the eastern portion of the Querecho Plains. The location of the DNCS site, as well as the Mescalero Ridge and the Querecho Plains, are shown in the vicinity map provided as **Figure 2**. Shallow subsurface geologic units at the DNCS site include approximately 50 ft of unconsolidated Quaternary sand, silt, gravel and caliche above Triassic shale bedrock of the Chinle Formation (redbeds), as demonstrated by the site-specific drilling and testing results.

2.1 Groundwater Occurrence and Site Conditions

Water-bearing geologic units in the vicinity of the DNCS site include the Tertiary Ogallala Aquifer, shallow Quaternary alluvial aquifers, and the Santa Rosa Sandstone in the lower portion of the Triassic Chinle shale. The Ogallala Aquifer can be a prolific water-bearing unit in the region east of Mescalero Ridge, but it is absent west of Mescalero Ridge in the area of the DNCS site. In the Querecho Plains area, thin and laterally discontinuous groundwater saturations are occasionally present in the basal alluvium overlying the Triassic Chinle. The Santa Rosa Sandstone is present at depth throughout much of southern Lea County, and this unit can locally produce modest quantities of groundwater.

Configuration of the top of the Chinle shale (redbeds) is an important control on water availability in the Ogallala Aquifer, as well as in the alluvial aquifers in the area. The Chinle shale redbeds were exposed and dissected by erosion throughout the region prior to deposition of the Ogallala. The most prolific Ogallala production occurs in areas where stream channels were cut into the Chinle shale and subsequently filled with coarse fluvial Ogallala detritus. The resulting buried paleochannels are areas where saturated aquifer thickness is greatest, and the best water-bearing properties are present.

In the Querecho Plains area, the Ogallala was removed by erosion and the Chinle shale section was reexposed and dissected by drainages associated with the Pecos River catchment to the southwest. Shallow groundwater in this region is generally restricted to paleochannels and other low-lying areas that were incised into the Triassic redbeds bedrock prior to deposition of the Quaternary alluvium over the shale bedrock. Configuration of the top of the Chinle redbeds is an important control on groundwater availability that was recognized by Nicholson and Clebsch. They utilized data for the Chinle shale formation obtained from oil exploration seismic shot holes to prepare a structure contour map of the top of the Chinle Shale redbeds covering southern Lea County (Nicholson and Clebsch, 1961, Plate 1). The Nicholson and Clebsch structure contour data was projected on the project vicinity map in **Figure 2** (red isopleths).

The geometry of land surface and underlying geologic units, as well as groundwater saturations in the vicinity of the DNCS site are depicted in the hydrogeologic cross-section shown on **Figure 3**. This diagram indicates that no shallow alluvial groundwater is present at the DNCS site, consistent with site-specific drilling results. Based upon information projected from nearby petroleum wells, the shallowest potential water-bearing zone is the Santa Rosa Sandstone (lower Triassic Chinle), which is approximately 600 ft below grade at the DNCS site.

Table 2 provides a summary of information from water wells and other oil wells and/or borings within two miles of the DNCS site. A more extensive table of the wells and borings in the vicinity of the site is included in **Attachment A-3**. Data included in these **Tables** were obtained from the following sources:

TABLE 2
Records of Wells within 2 miles of the DNCS Site
DNCS Environmental Solutions

| Owner or OCD Designation | OSE Permit Number | Location PLS | Location Lat D.dddd | Location Long D.dddd | Use | LS Elev. | TD | WL | WL Elev. | Date | WBZ | Top WBZ | Bottom WBZ | WBZ Thickness | Trc Top | Trc Elev. | Comments or Source |
|----------------------------------|-------------------|-----------------|---------------------|----------------------|----------|----------|---|--------|----------|-----------|--------|---------|------------|---------------|---------|-----------|------------------------|
| Conoco Oil MCA Battery 4 #189 | | 17.32.26.41000 | 32.803679 | 103.735041 | OCD | 3965 | 1024 Log, cased to 1062 | | | | Trc | 710 | 850 | 0 | 80 | 3885 | OCD Record 5/11/78 |
| Continental Oil Pearsall BX #2 | | 17.32.34.241111 | | | OCD | 3952 | casing to 3515, redbeds to 792 | | | | | | | | 64 | 3888 | OCD Record |
| El Paso Natural Gas Co | L 00058-2 misc | 17.33.29.222221 | 32.811945 | 103.682131 | Ind-Dom | 4188 | 244 | 204 | 3984 | 7/22/1958 | To/Qal | 185 | 228 | 40 | 244 | 3944 | OSE Well Record |
| | | | | | | | | 201.35 | | 3/14/1961 | | | | | | | GAI BLM 1978 |
| Oil Test | | 17.33.29.34411 | | | Oil Test | 4044 | | 61.43 | 3982.57 | 2/16/1971 | To/Qal | | | | | | GAI BLM 1978 |
| Conoco MCA Unit Battery 4 #133 | | 17.33.30.11000 | 32.801966 | 103.709129 | OCD | 4033 | casing to 3913, redbeds to 515, anhydrite 515-533 | | | | | | | | 28 | 4005 | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #134 | | 17.33.30.12000 | | | OCD | 4057 | casing to 1185, redbeds to 1145 | | | | | | | | 45 | 4012 | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #135 | | 17.33.30.14000 | | | OCD | 4062 | casing to 20 | | | | | | | | 85 | 3977 | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #197 | | 17.33.30.31111 | 32.80457 | 103.710241 | OCD | 4037 | casing to 3963, redbeds to 791, sandstone 628-650 | | | | | | | | 96 | 3941 | OCD Record 5/11/78 |
| Walter Williams stock well | | 17.33.30.124 | 32.810128 | 103.703623 | | 4045 | | 70 | 3975 | 7/29/1954 | | | | | | | Nicholson & Clebsch |
| | | 17.33.30.12432 | | | | 4053 | | 69.14 | | 2/16/1971 | | | | | | | GAI BLM 1978 |
| Cities Svc SMGSA Unit Tract 1 #2 | | 17.33.30.42000 | 32.803774 | 103.696154 | OCD | 4055 | casing to 1199 | | | | | | | | 145 | 3910 | OCD Record 5/11/78 |
| DNCS Properties LLC Boring 5 | | 17.33.31. | 32.78815 | 103.69491 | | 3979.03 | 150 | dry | | | | | | 0 | 65 | 3914.03 | DNCS Site Boring Log |
| DNCS Properties LLC Boring 6 | | | 32d46m54.1s | 103d42m27.1s | | 3939.5 | 75 | dry | | | | | | 0 | 67 | 3872.5 | DNCS Site Boring Log |
| OXY USA Inc. | CP 758 | 18.33.4.34233 | 32.771967 | 103.669204 | exp | 3989 | 250 | dry | | 5/10/1991 | -- | -- | -- | | 65 | 3924 | OSE Well Record |
| DNCS Properties LLC Boring 3 | | | 32.77692 | 103.70411 | exp | 3940.23 | 150 | dry | | 2/6/2013 | | | | | 45 | 3895.23 | DNCS Site Boring Log |
| DNCS Properties LLC Boring 4 | | | 32.777 | 103.69465 | exp | 3968.20 | 150 | dry | | 2/9/2013 | | | | | 50 | 3918.2 | DNCS Site Boring Log |
| BJ Wooley | CP 546 | 18.33.9.42241 | 32.76111 | 103.660559 | Com | 3978 | 90 | 70 | 3908 | 6/3/1975 | To/Qal | 70 | 85 | 20 | 85 | 3893 | OSE Well Record |
| | L 6131 | 18.33.8.213 | 32.766525 | 103.68429 | | | 194 | 100 | | | | 130 | 193 | 63 | | | OSE Waters POD summary |

- Logs from geotechnical borings at the DNCS tract (**Attachment A-1**)
- Well and water level data from Geohydrology Associates Inc. (1978) (**Attachment A-2**)
- Water well data from Nicholson and Clebsch (1961)
- New Mexico Office of the State Engineer (NMOSE) Well Records (**Attachment A-3**)
- Summary oil well data on shallow stratigraphy and water-bearing units derived from New Mexico OCD records and recorded in NMOSE Well Record files (**Attachment A-3**)

Copies of information from these sources are included with this submittal in the above-referenced sections of **Attachment A**.

Wells and borings in the vicinity of the DNCS site that yielded data of significance with regard to groundwater occurrence or potential are plotted on the map provided as **Figure 2**. Few water wells are present in the Querecho Plains area in the vicinity of the DNCS site. Soil borings advanced on the DNCS tract found dry alluvium on top of the redbeds and no saturation in approximately the upper 100 ft of the redbeds at the site (copies of the logs from these borings are included in **Attachment A-1**).

A few shallow alluvial wells are present in close proximity to Mescalero Ridge, including the Williams stock well, which is located approximately 7,600 ft north of the DNCS site (Nicholson and Clebsch, 1961). Based upon water levels reported by Geohydrology Associates (1978; **Attachment A-2**), an oil test well located approximately 4,400 ft northeast of the DNCS site, and open cased holes located 10,200 ft and 12,400 ft east of the DNCS site, apparently penetrated thin saturations in the alluvium. Based upon information from NMOSE Well Records (Well RA 10175 and Well L 3454; **Attachment A-3**), a well located approximately four miles west of the DNCS site, and another well located 3.5 miles south of the DNCS site, produce limited quantities of water from the alluvium.

Based upon notes taken from OCD records and posted on NMOSE Well Records, thirteen oil wells in the vicinity of the DNCS site penetrated water-bearing zones, or significant sandstones in the Triassic redbeds. Locations of these wells are shown on **Figure 2** and

details of the zone descriptions, as well as summary information are included on the well logs provided in **Attachment A-3**. One of these wells (Conoco, B-4-197), located approximately 5,800 ft north of the DNCS site, penetrated sandstone between 628 ft and 650 ft below land surface; another well (B-4-189), located about 9,000 ft northwest of the DNCS site penetrated a “water sand” between 710 ft and 810 ft below land surface.

Several wells to the south and “downgradient” of the DNCS site appear to produce from water-bearing zones in the Triassic bedrock unit. One of these wells (NMOSE Well Record, CP-677, **Attachment A-3**), located approximately 5.7 miles southwest of the DNCS site, is completed in a sandstone that is between 498 and 510 ft below grade; and the water level in this well was measured at 460 ft below grade, indicating artesian conditions. Another well drilled under the same permit a short distance away found similar conditions. Geohydrology Associates, Inc., (1978, **Appendix A-2**) reported a water level of 434.41 ft below land surface in an oil test well located approximately four miles southwest of the DNCS site. No water-bearing zone interval was identified in this record; however another well located approximately one mile southeast of this well penetrated several sandstones below a depth of 500 ft. The projected geometry of sandstones and associated potentiometric surface of these wells is depicted in the hydrogeologic cross section in **Figure 3**.

3.0 PROPOSED VADOSE ZONE MONITORING PROGRAM

Due to the anticipated great depth to the shallowest water-bearing units, as well as high impedance to vertical water flow posed by the Triassic redbeds at the DNCS site, vadose zone monitoring is proposed as the preferred alternative for the site. The proposed vadose zone monitoring wells would be positioned such that downgradient wells would be located downslope on the mapped upper redbed surface to the west of the Facility, and upgradient wells would be placed upslope on the redbed surface near the southeast corner and along the east boundary of the Facility. Equally important is the planned installation of a double HDPE-lined leak detection system that underlies the entire waste disposal footprint, which will provide for potential fluid capture beneath the primary liner.

3.1 Proposed Monitoring Well Locations

The location of the proposed Facility, as well as the site geotechnical borings and interpreted terrain on the top of the redbed surface are shown on the map provided as **Figure 4**. This diagram projects the isopleths on the upper redbed surface prepared by Nicholson and Clebsch (1961), as well as interpolated isopleths that comport with new redbed surface elevation data obtained from site-specific geotechnical borings on the DNCS site. It should be noted that no adjustment of the Nicholson and Clebsch isopleths was necessary to honor the new data points, confirming both datasets. The resulting structure map presents a detailed depiction of the terrain on the redbed surface at the proposed Facility, and a high confidence level that the proposed VWs are positioned directly downslope from the proposed waste disposal area in the zone most appropriate for detection of a potential release.

Figure 5 depicts the proposed location of the proposed vadose zone monitoring network designed specifically to address both the known slope of the redbed surface, and the locations of the planned leachate collection sumps. The leachate collection sumps represent the most downgradient termini of the leachate collection system; are the deepest penetrations of the surface deposits; and are vertically most proximate to the redbed surface (e.g., 15 – 30 ft). In addition, the individual cell sumps are designed as the locations with the greatest potential for leachate head development.

The planned strategy consists of the following elements, designed to correlate with the Landfill site development sequence (**Figure 5**):

1. Following permitting, and prior to Landfill development; VW-1, VW-2, and VW-3 will be installed to evaluate ambient conditions. These wells will be constructed in accordance with the specifications listed in Section 3.2; and will be sounded for the potential presence of water on the redbed surface. VW-1 will serve as an upgradient monitoring point for Phase 1 operations; and the northern portion of Phase 2 operations. VW-2 and VW-3 will be positioned as “sentinel” downgradient wells for Phase 1 (i.e., Units 1-3), and are specifically located adjacent to Sumps 1 and 3 based on the logic discussed above.
2. Downgradient Well VW-4 will be installed prior to the development of Phase 2 (i.e., Units 4-6) before cell construction in order to evaluate pre-construction conditions. It is deliberately positioned adjacent to the sump for central Unit 5. Well VW-5 will be installed prior to the development of Phase 3, and will serve as the general upgradient monitoring point for all of the Landfill development. Well VW-6 is the downgradient sentinel well for Phase 3, and will be installed prior to development of disposal Units 7-9.

3. Shown on **Figure 5** are four additional potential downgradient monitoring points (i.e., VW-7 through VW-10) that may be added incrementally dependent upon monitoring results from the primary network (i.e., VW-1 through VW-6). These future VWs would be installed to the same specifications prescribed in Section 3.2; and well locations may be adjusted in consultation with OCD.

Evidence of groundwater in the VWs should not necessarily be attributed to Landfill impacts, as reconfiguration of surface stormwater controls may alter recharge. Testing of water samples from the VWs will confirm if any water encountered is the result of surface water infiltration; or potential impacts from the disposal Facility. Details regarding sampling and analysis will be included in the Vadose Zone Monitoring Plan (**Volume II.8** of the Application for Permit).

3.2 Proposed Well Drilling and Completion

Prior to installation, drilling permits will be obtained from the NMOSE. Proposed VWs will be installed using hollow-stem auger drilling methods; and no fluids would be introduced into the borings during drilling. Undisturbed, depth-referenced samples of penetrated sediments will be collected on 5-ft intervals using split-spoon sampling equipment. Drive blow counts will be logged during each sampling event to allow precise determination of the upper redbed surface in each boring. A qualified hydrogeologist will be present on location during drilling, and will prepare detailed descriptions of the lithology, texture, sorting, rounding, color, degree of lithification and moisture content of each sample and stratigraphic unit that is penetrated.

Each boring will be advanced approximately 3 ft into indurated Triassic redbeds. Although split spoon sampling offers ample opportunity to identify saturated sediments with a high degree of confidence, each boring will be further evaluated for the presence of free water. Upon reaching total depth, the rig would be placed on standby for at least two hours, during which time soundings will be made inside the augers to check the potential of accumulating fluid.

VWs will be completed in accordance with specifications set forth on the well detail sheet provided as **Figure 6**. Each well will be completed using 4-inch schedule 40 flush joint casing to allow for sample extraction. Each well will be completed with a 10-ft length of 0.010-inch slotted well screen, positioned with the lowermost end extending approximately 3 ft below the detected upper redbed surface and the upper end extending approximately 7 ft into the overlying alluvium. The well annulus will be backfilled with a 10/20 grade silica sand pack

extending 2 ft above the screen, a bentonite seal extending 1 ft above the sand pack, and an annular seal consisting of bentonite grout or equivalent extending to land surface. Each well will be equipped with a radially sloped concrete surface pad with locking steel shroud extending approximately 3 ft above grade and marked.

3.3 Proposed Monitoring Program

The proposed vadose zone monitoring program will initially include inspection of each well for the presence of fluid in advance of disposal area construction. Results of fluid detection measurements will be submitted with related leachate monitoring results in routine Facility operations reporting to OCD. If fluids are noted in any of the VMs or leak detection system, the fluid will be sampled and tested in accordance with the Vadose Zone Monitoring Plan, which will be provided as **Volume II.8** in the Application for Permit. The continued lack of fluids in the leak detection system and vadose monitoring wells may be the subject of specific approvals by OCD for a reduced monitoring frequency and/or analyte list.

4.0 LIST OF REFERENCES


- Geohydrology Associates, Inc., 1978, Collection of hydrologic data, eastside Roswell Range EIS area: Open-File Consultant Report to Bureau of Land Management, Denver, Colorado, Contract No. YA-512-CT-7-217, Table 4.
- Golder Associates Inc. and Gordon Environmental, Inc., 2013, Hydrogeology (Volume IV.2), Application for Permit, DNCS Environmental Solutions, Surface Waste Management Facility
- Golder Associates Inc. and Gordon Environmental, Inc., 2013, Vadose Zone Monitoring Plan (Volume II.8), Application for Permit, DNCS Environmental Solutions, Surface Waste Management Facility
- Kelly, T.E., Geohydrology Associates, Inc., 1984, Hydrologic assessment of the Salt Lakes area, western Lea County, New Mexico, Consultant report to Pollution Control, Inc., Lovington, New Mexico, Figure 1.
- Nicholson, A., and Clebsch, A., 1961, Geology and ground-water conditions in southern Lea County, New Mexico: New Mexico Bureau of Mines and Mineral Resources Groundwater Report 6.
- Office of the New Mexico State Engineer, 2013, Electronic image well log files for Lea County, http://www.ose.state.nm.us/water_info_rights_dist2_LeaCountyWellLogs.html

NM1-57

Revised Permit Application


June 2014


Volume 2, Part 2 of 2: Facility Management Plans

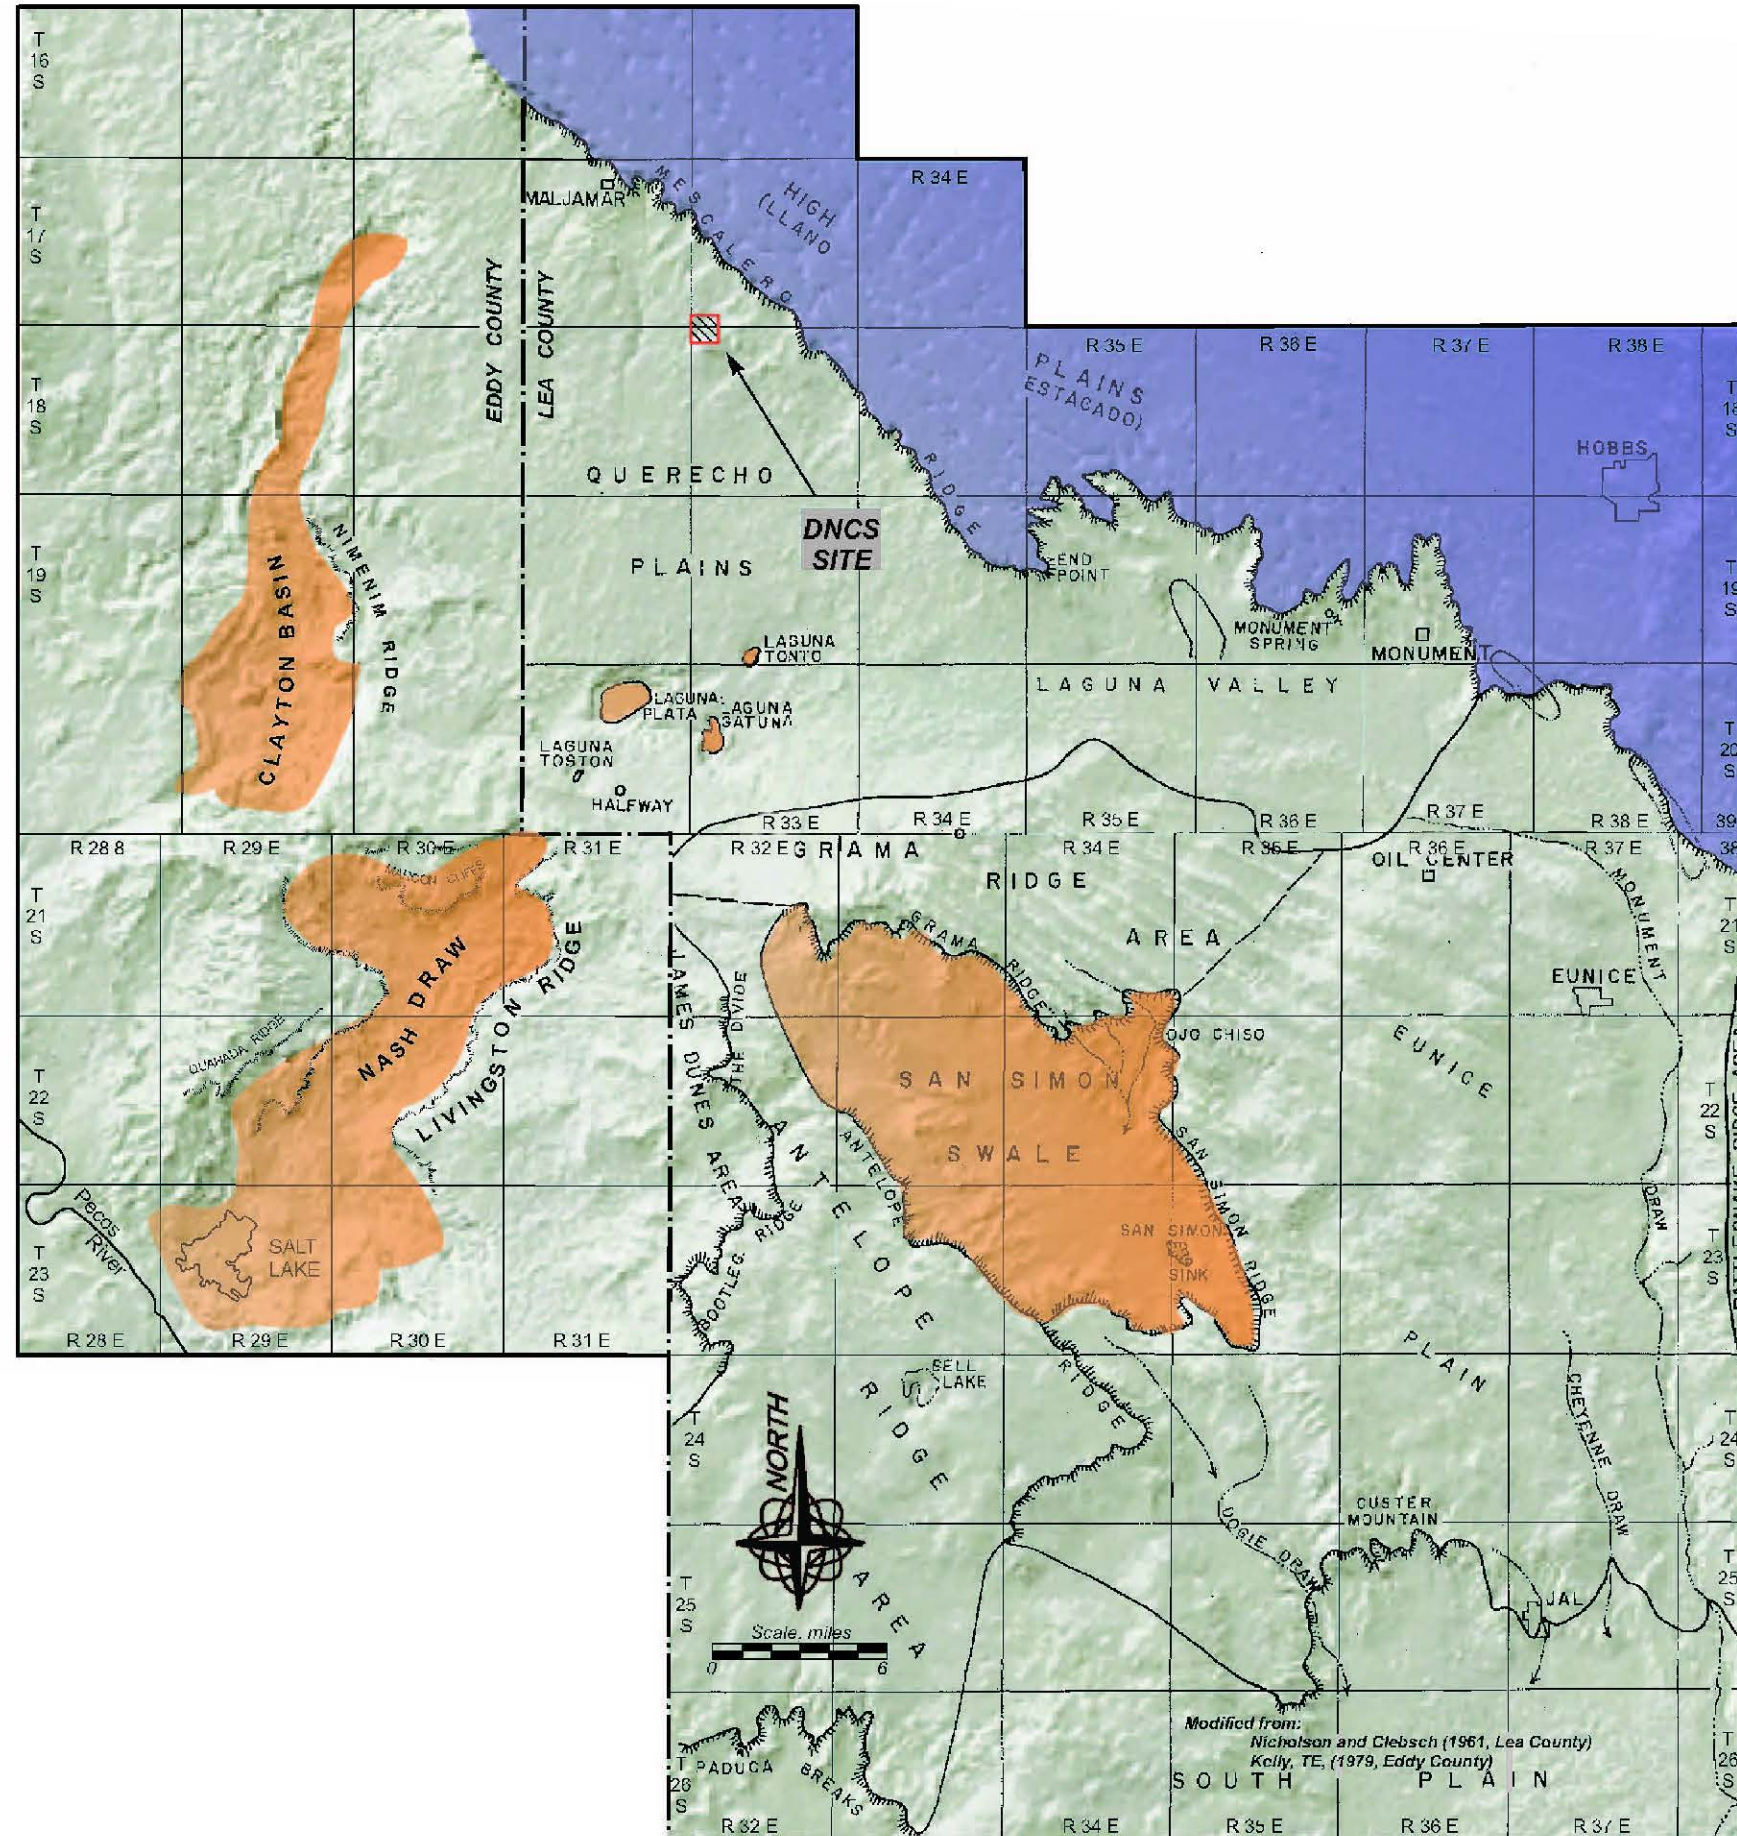

PHYSIOGRAPHY OF SOUTHERN LEA COUNTY
AND EASTERN EDDY COUNTY

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO

| | | |
|--|-----------------------------|---|
|  Gordon Environmental, Inc. <i>Consulting Engineers</i> | | 213 S. Camino del Pueblo Bernalillo, New Mexico, USA Phone: 505-867-8990 Fax: 505-867-8991 |
| DATE: 11/04/2013 | GAD: UPDATED FIGURE 1.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: GEI | FIGURE 1 |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

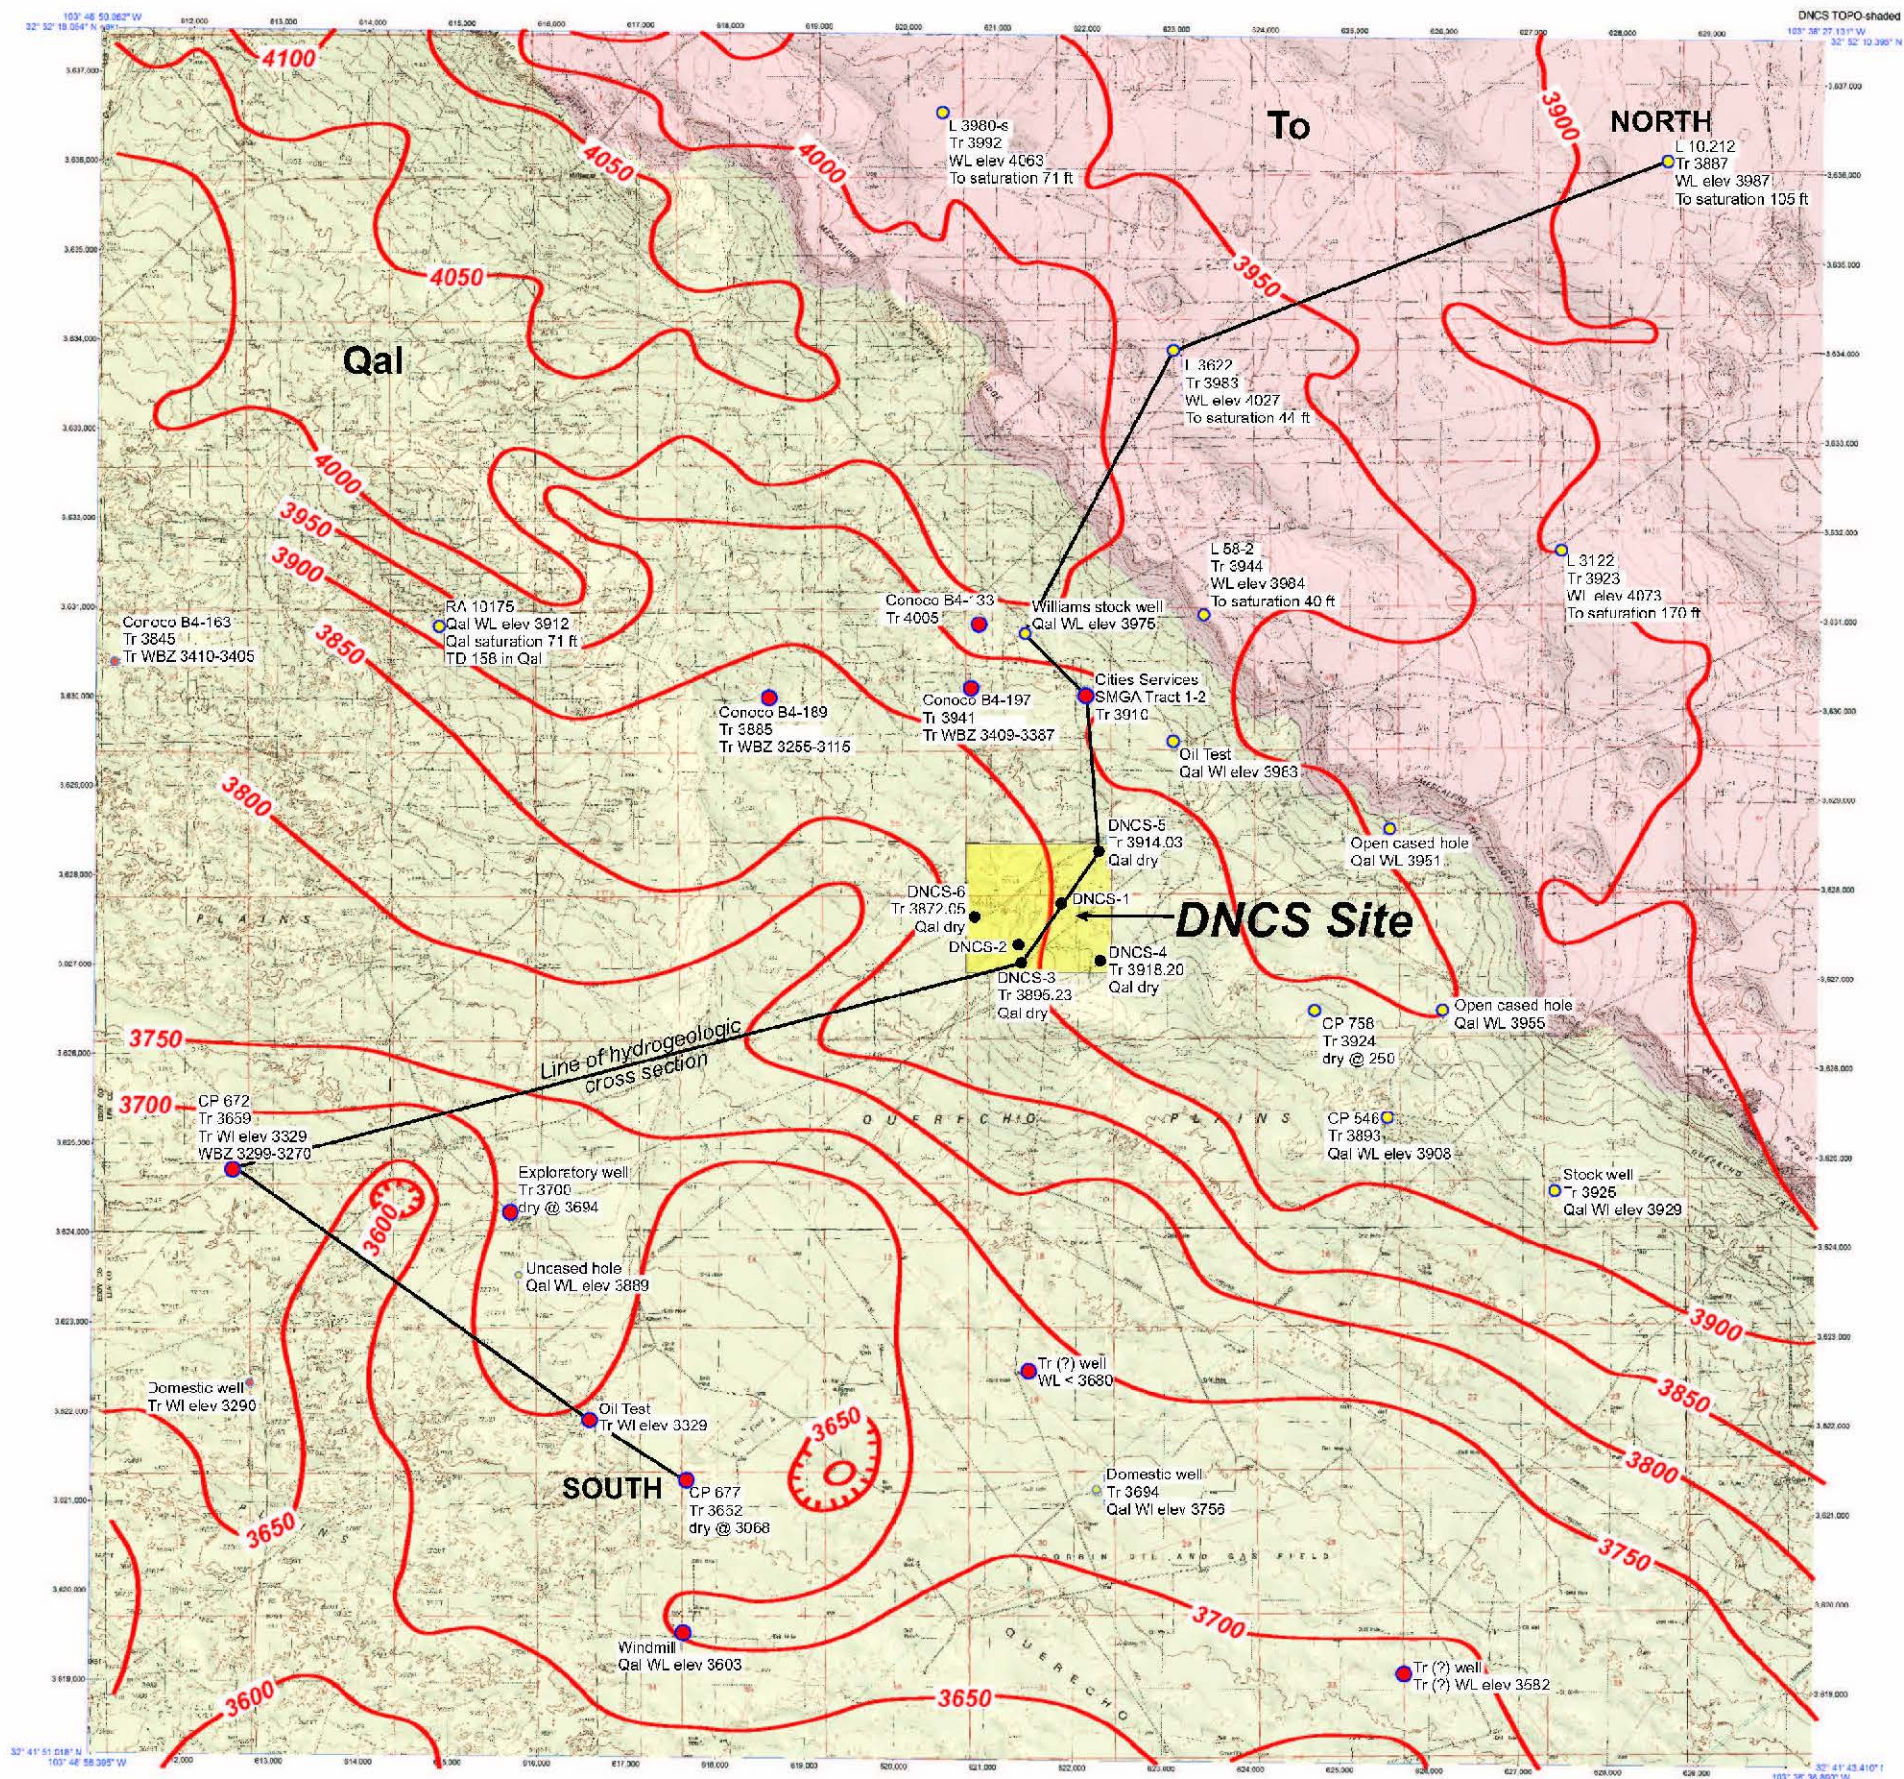

LEGEND

- Location of well having Triassic bedrock top elevation or Triassic water bearing zones and/or water levels
- Location of well completed in alluvium or Ogallala Formation
- Location of hydrogeologic boring on the DNCS site
- 3600 — Isopleth on line of equal elevation (feet above MSL) on the top of Triassic bedrock units (from Nicholson and Clebsch, 1961)

To Outcrop of Tertiary Ogallala Formation

Qal Outcrop of Quaternary alluvium



Scale, miles
0 1.0 2.0

SURFACE GEOLOGY AND WELL LOCATIONS

DNCS ENVIRONMENTAL SOLUTIONS LEA COUNTY, NEW MEXICO




Gordon Environmental, Inc.
Consulting Engineers


213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8960
Fax: 505-867-8991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 11/04/2013 | GAD: UPDATED FIGURE 2.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: GEI | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | FIGURE 2 |

Hydrogeologic Cross Section
DNCS Permit Site, Lea County, New Mexico

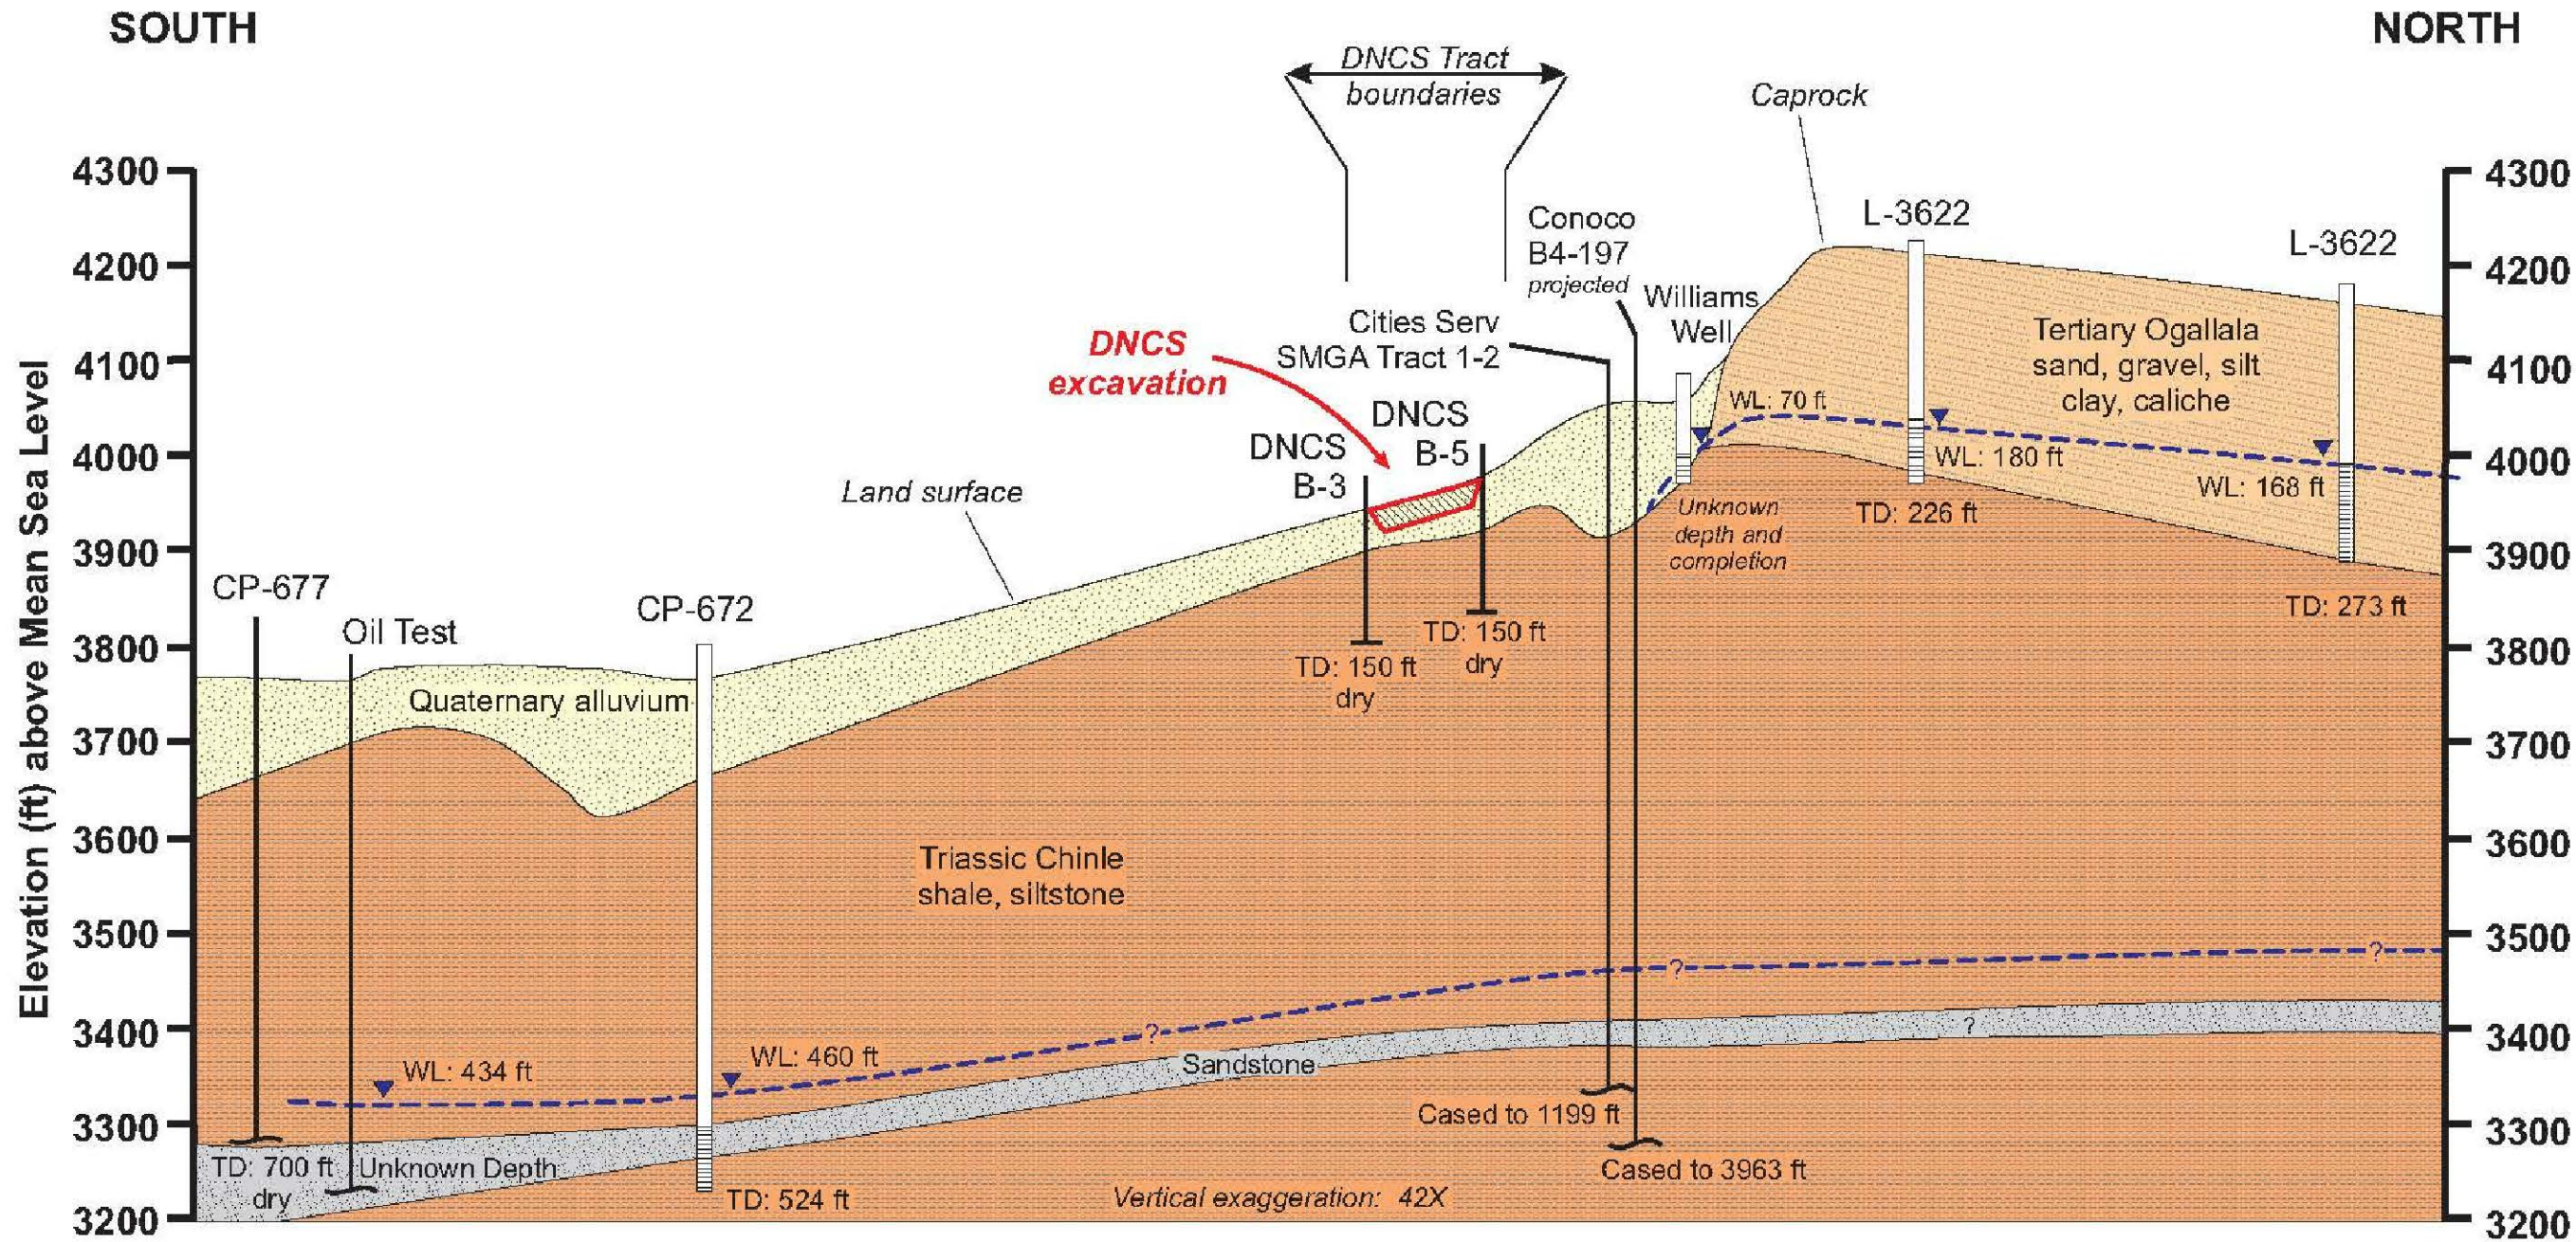


HYDROGEOLOGIC CROSS SECTION
THROUGH THE DNCS SITE
DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO

 Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8990
Fax: 505-867-8991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 11/04/2013 | GAD: UPDATED FIGURE 3.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: GEI | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | FIGURE 3 |

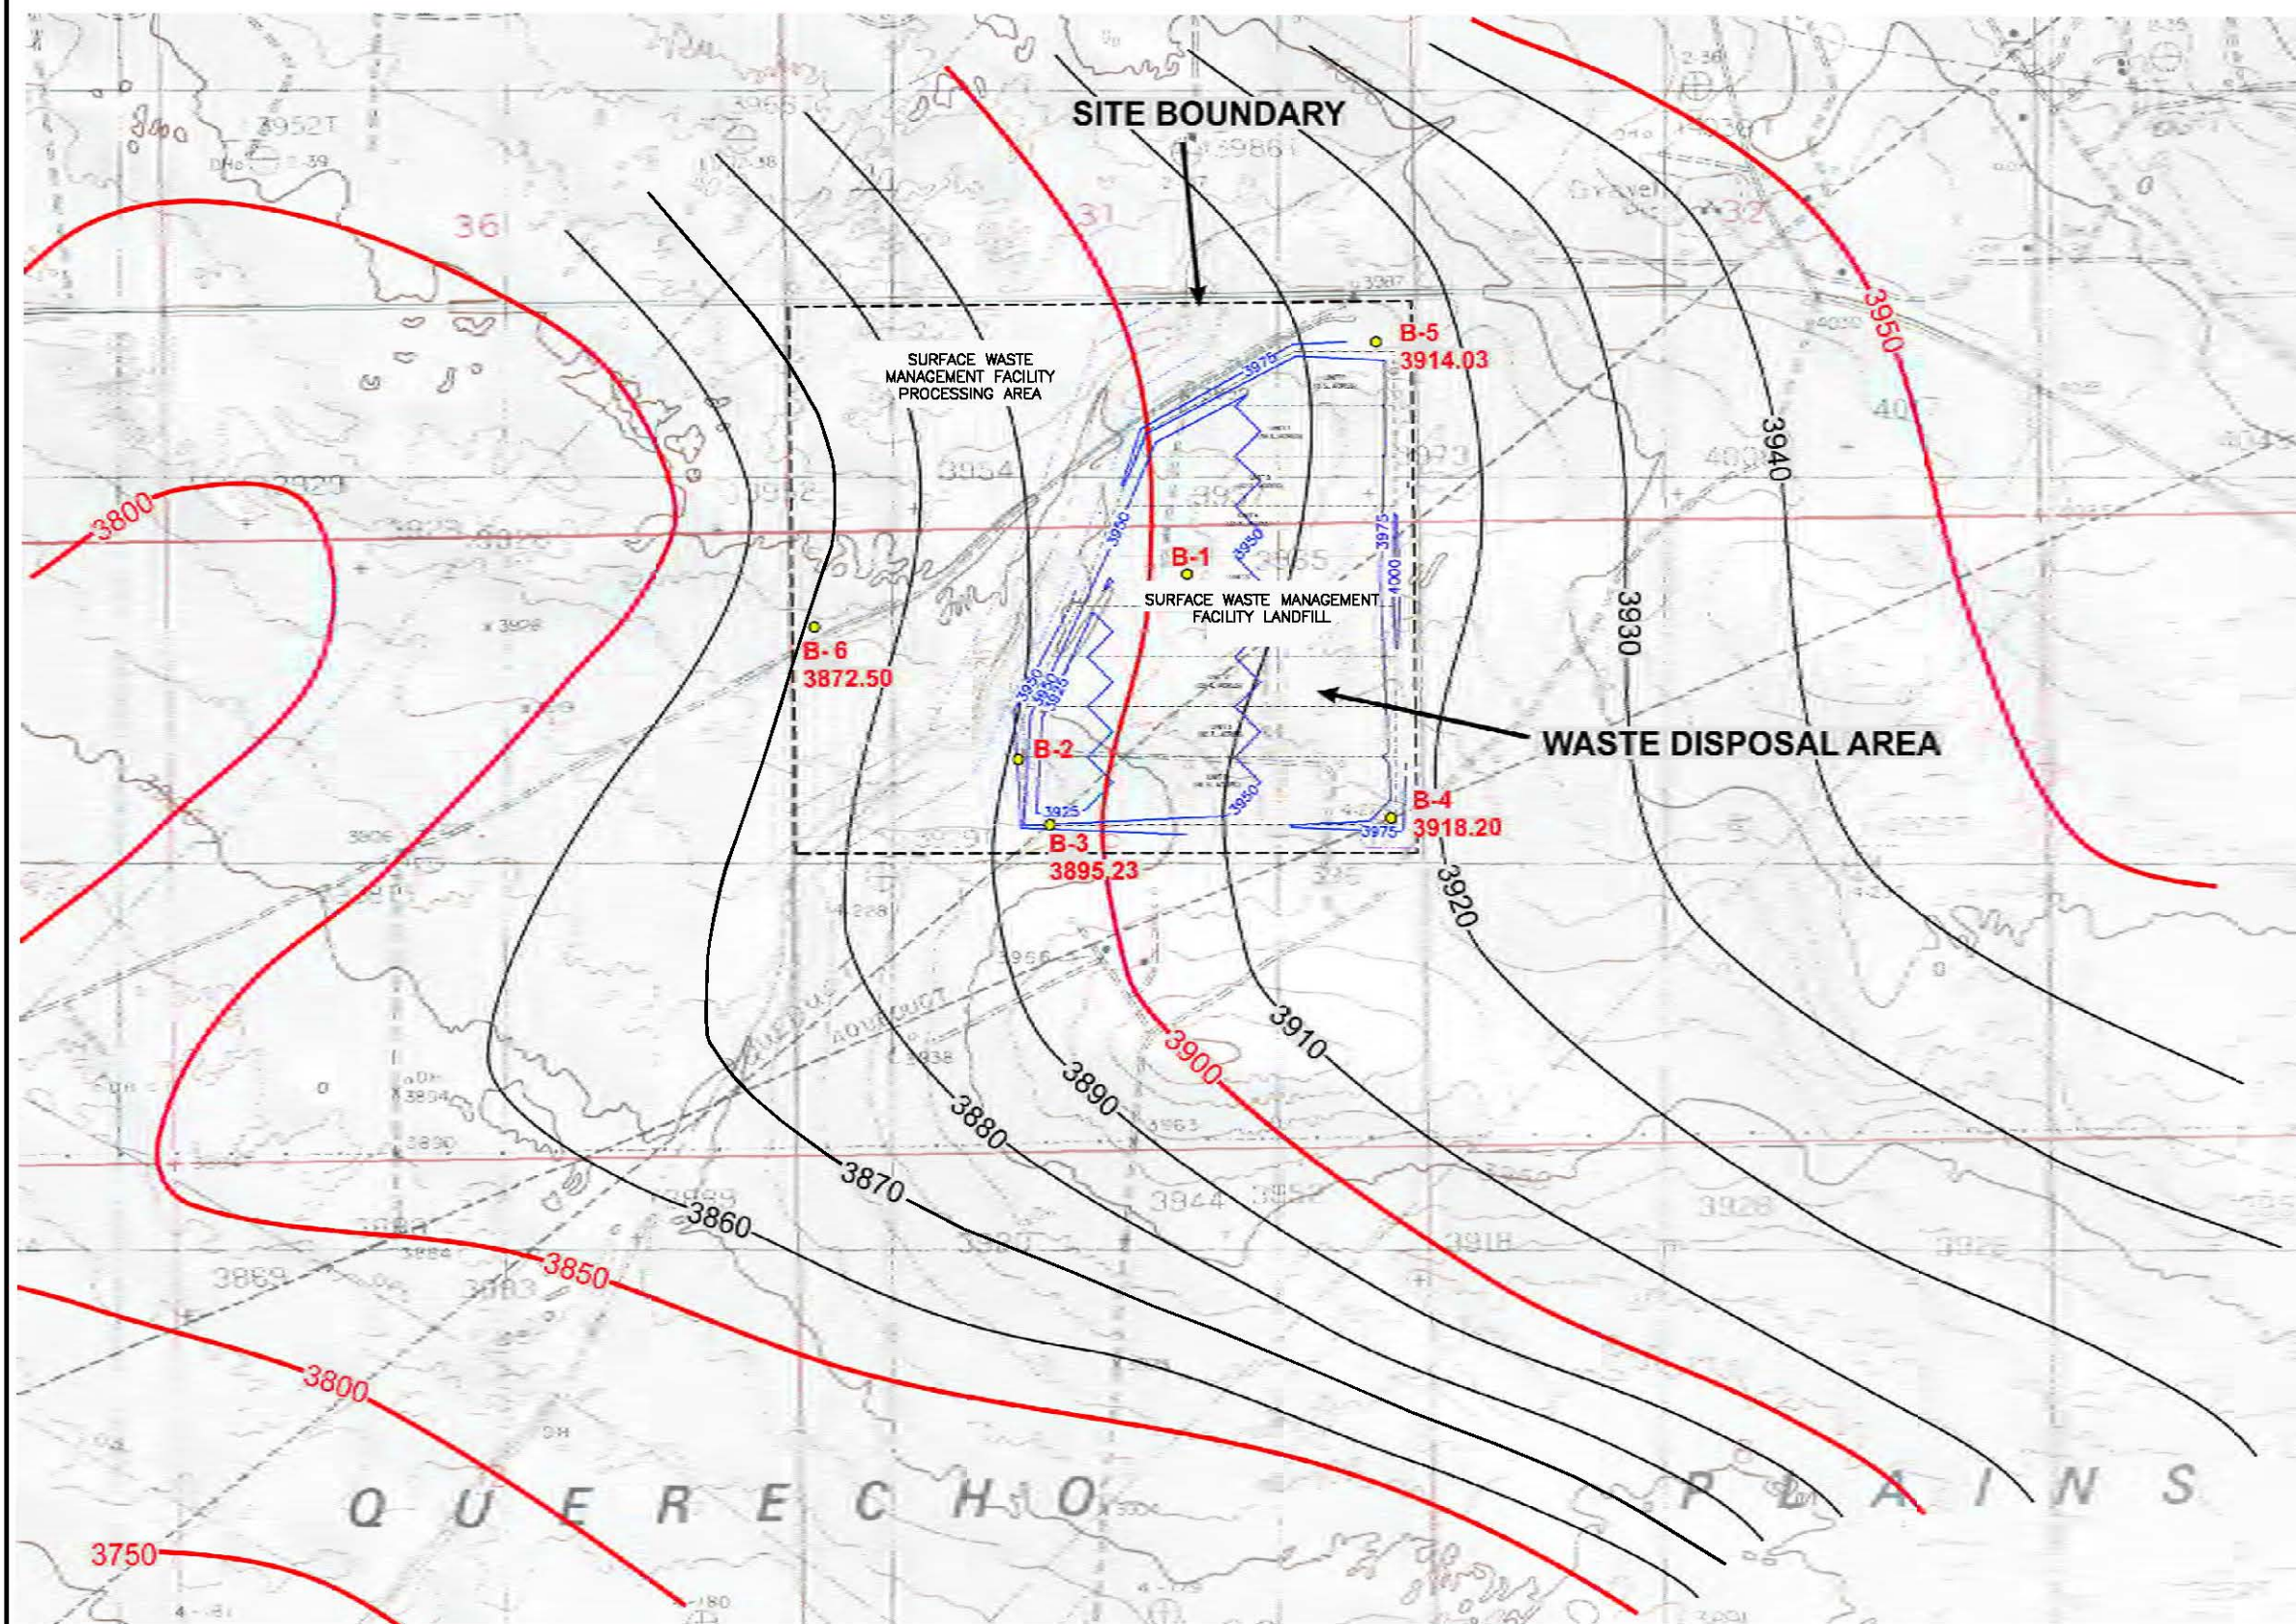

B-5
3914.03

Location of site geotechnical boring showing designation and elevation of top of redbeds (feet above MSL)

3950

Isopleth on top of redbeds by Nicholson and Clebsch (1961)

3910

Interpolated Isopleth on upper redbed surface using site boring data and 10-ft contour interval (feet above MSL)

3950

Landfill Base Grades



NOMINAL SCALE 1"=1500'


TRIASSIC REDBED SURFACE


DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO

Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-8990
Fax: 505-867-8991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 10/18/2013 | CAD: REDBED.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: GEI | FIGURE 4 |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

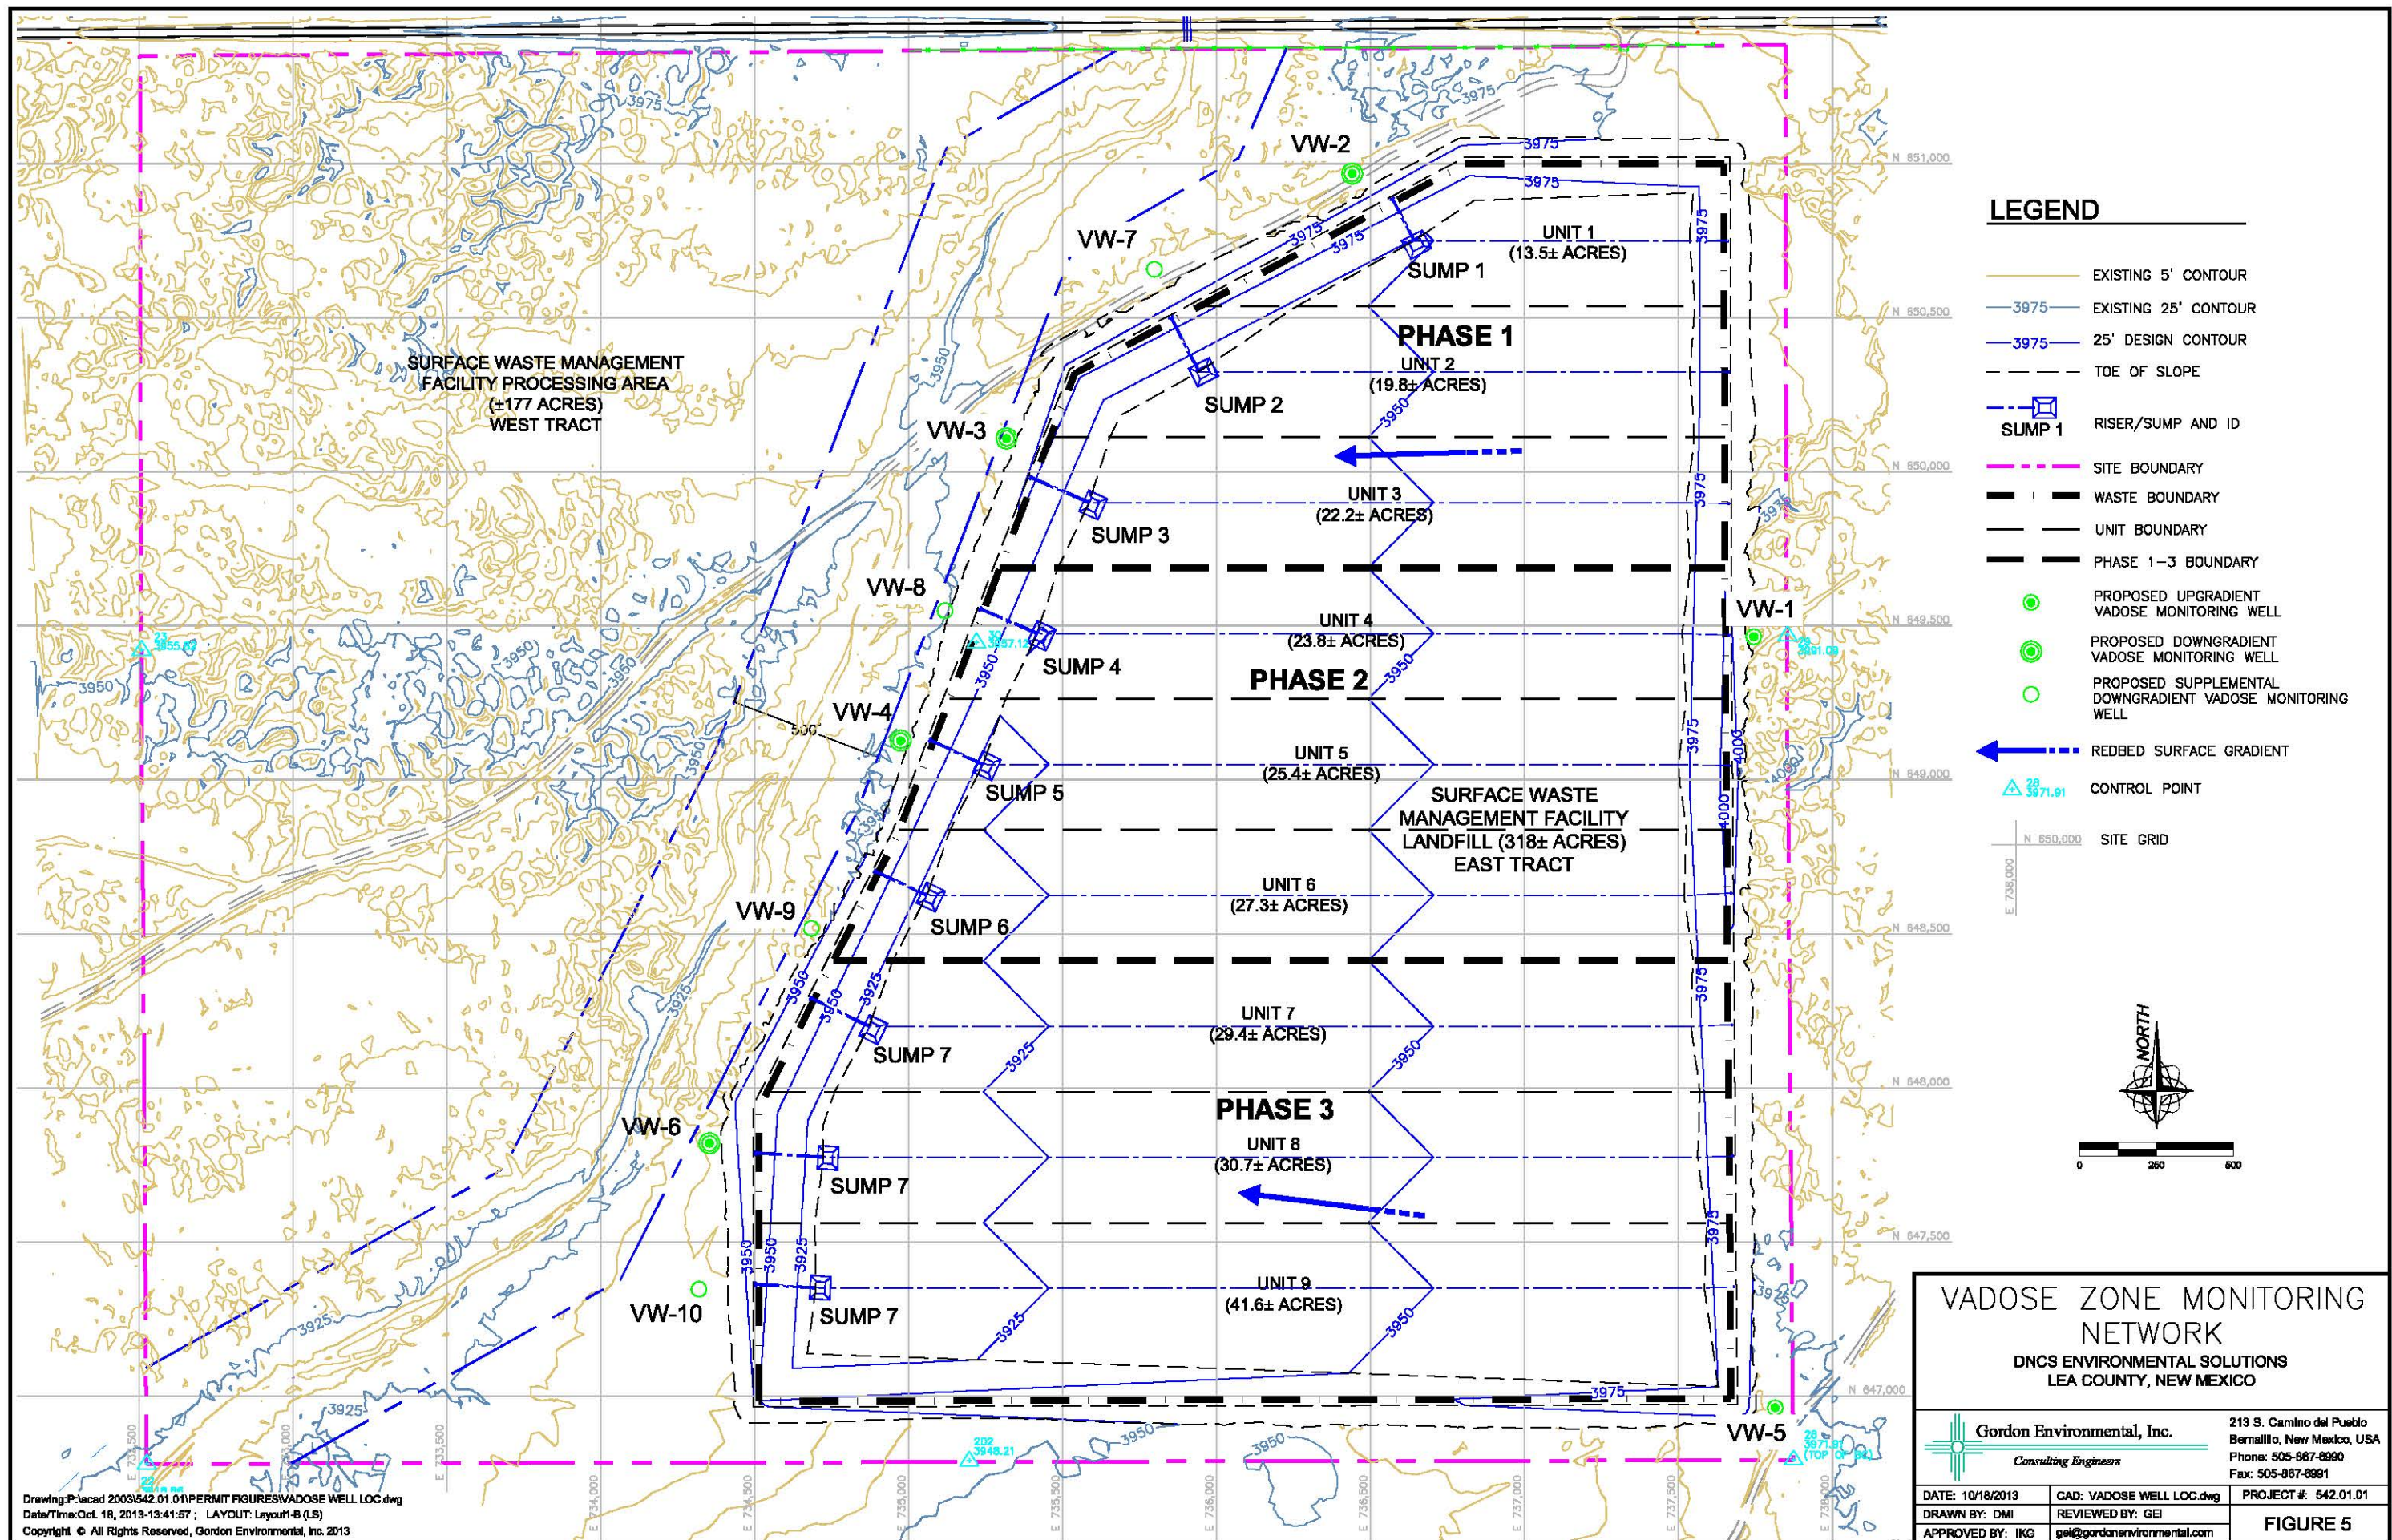

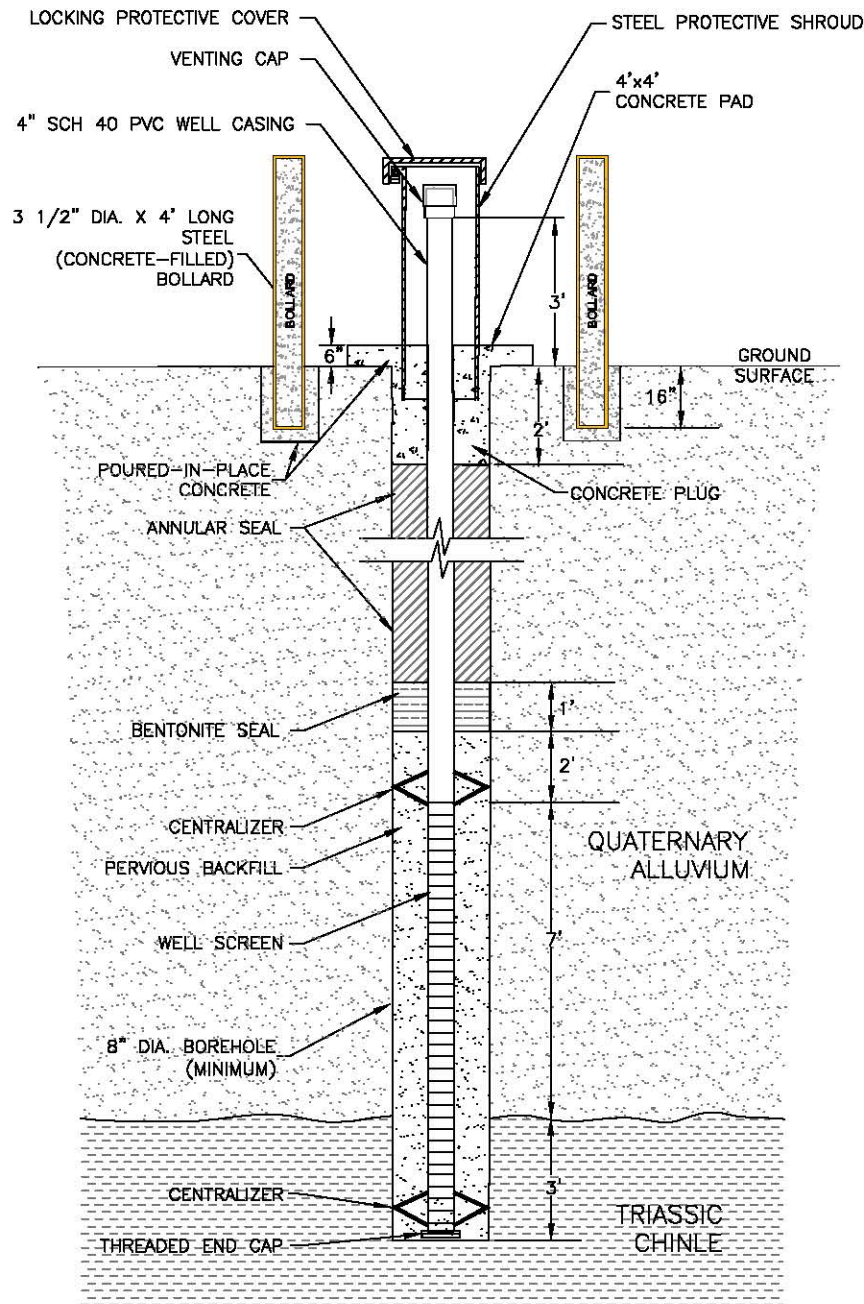

TYPICAL VADOSE ZONE MONITORING WELL

NOT TO SCALE

LEGEND

CASING: 4" DIA. SCH 40 PVC

SCREEN: 4" DIA. 0.010" MACHINE SLOT SCH 40 PVC

PERVIOUS BACKFILL: 10-20 COLORADO® SILICA SAND OR EQUIVALENT

ANNULAR SEAL: NEAT CEMENT WITH 2% TO 5% BENTONITE

NOTE:

SPECIFIC VERTICAL DIMENSIONS FOR EACH NEW WELL WILL BE INCLUDED IN DSE AND OCD SUBMITTALS.

VADOSE ZONE MONITORING WELL CONSTRUCTION DETAIL

DNCS ENVIRONMENTAL SOLUTIONS
LEA COUNTY, NEW MEXICO



Gordon Environmental, Inc.
Consulting Engineers

213 S. Camino del Pueblo
Bernalillo, New Mexico, USA
Phone: 505-867-6990
Fax: 505-867-6991

| | | |
|------------------|-----------------------------|----------------------|
| DATE: 10/18/2013 | CAD: VADOSE MW.dwg | PROJECT #: 542.01.01 |
| DRAWN BY: DMI | REVIEWED BY: MJC | |
| APPROVED BY: IKG | gei@gordonenvironmental.com | |

FIGURE 6

ATTACHMENT II.8.A
Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico

ATTACHMENT A-1
LOGS OF GEOTECHNICAL BORINGS AT THE DNCS SITE



Gordon Environmental, Inc.
Consulting Engineers

Log of Borehole No.: **B3**

Total Depth **150'**

Page **1** of **2**

Client: **DNCS PROPERTIES, LLC**

Project No.: **542.01.01**

DRAFT

| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | | |
|--|-------------------|--|--|--|---|--|--|
| NONE Ft. While Drilling (below ground surface) | | N: 32.77692° | E: -103.70411 | Date Started: 02-06-2013 | Drilling Co.: PRECISION SAMPLING | GEI Rep.: MLH | |
| NONE Ft. at completion (below ground surface) | | E: -103.70411 | | Date Comp: 02-08-2013 | | Drill Meth.: HSA, AIR ROTARY | |
| water level data approximate | | Elevation: 3940.23 | | Location: DNCS SITE, LEA COUNTY | Rig Type: CME 85 | Sampling Meth.: SS/BR/CC/ARC/AC | |
| | | COORD REF SYS WGS84 | | SE/4, N/2, SEC 6, | Driller: JUAN BARRAZA | | |
| | | | | T18S, R33E, N.M.P.M. | Helper: TINO V. | | |
| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | | Rig Blow Counts/ft | Notes: | |
| 0' | | | 0'-1' SAND, FINE AND SILT; BROWN (WINDBLOWN, LOOSE) | | | UNCONFORMITY AS BASE OF DUNE SAND | |
| 5' | | | 1'-5', SAND; FINE, AND CALICHE LIGHT BROWN (7.5YR 6/4), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | | 13 | VARIEGATED CALICHEFIED FROM 4" TO 40" | |
| 10' | | | 5'-10', SAND; FINE, WITH CALICHE AND TRACE GRAVEL TO 1"; PINK (7.5YR 7/2), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | | 33 | | |
| 15' | | | | | 31 | SPARSE GRAVEL TO 2"; ABUNDANT CALICHE FRAGMENTS | |
| 20' | | | 10'-25', SAND; FINE, WITH SILT, CALICHE FRAGMENTS, AND ROUNDED GRAVEL TO 1"; PINK (5YR 8/3), (POORLY GRADED; POORLY TO MODERATELY INDURATED/CALICHEFIED) | | 23 | | |
| 25' | | | | | 45 | | |
| 30' | | | | | 29 | TRACE GRAVEL TO 0.5" DIA. | |
| 35' | | | 25'-45', SAND; FINE, WITH SILT, CALICHE FRAGMENTS, AND ROUNDED GRAVEL TO 3.5"; LIGHT REDDISH BROWN (5YR 6/4), (POORLY GRADED; POORLY TO MODERATELY INDURATED/CALICHEFIED) | | 20 | TRACE GRAVEL TO 3.5" DIA. | |
| 40' | | | | | 32 | | |
| 45' | | | UNCONFORMITY | | 58 | INCREASE IN COARSE SAND AND GRAVEL @ CONTACT WITH UNDERLYING CLAYSTONE AND SILTSTONES | |
| 50' | | | 45'-55', CLAYSTONE AND SILTSTONE; WITH CALICHE FRAGMENTS, AND ROUNDED GRAVEL TO 2"; REDDISH BROWN (2.5YR 5/4), (POORLY GRADED; MODERATELY INDURATED) | | 100+ | CLAYSTONE AND SILTSTONE BEDS @ 45' GRAVEL TO 2" DIA. (ABUNDANT WEATHERED SERRANUS ROCK (TERTIARY AGED SIERRA BLANCA VOLCANIC) AND LIMESTONE CLASTS AT TOP OF CLAYSTONE-SILTSTONE CONTACT / UNCONFORMITY) | |
| 55' | | | | | 100+ | | |
| 60' | | | 55'-70', CLAYSTONE AND SILTSTONE; WITH CALICHE FRAGMENTS, AND ROUNDED GRAVEL TO 2"; REDDISH BROWN (2.5YR 4/4), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | 95 | HOLE CHECKED FOR WATER AFTER SITTING OVERNIGHT (13.5 HOURS), NO WATER DOWN-HOLE. | |
| 65' | | | | | 84+ | | |
| 70' | | | 70'-85', CLAYSTONE AND SILTSTONE; LIGHT RED (2.5YR 6/8), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | 93+ | ENCOUNTERING TO AIR-ROCKET DRILLING AT 80' BGS, NO MORE CONTINUOUS CORING | |
| 75' | | | | | | | |

KEY
BGS = BELOW GROUND SURFACE SS = SPLIT SPOON ARC = AIR ROTARY CUTTINGS AC = AUGER CUTTINGS CC = CONTINUOUS CORE
HSA = HOLLOW STEM AUGER BR = BRASS RING (SPLIT BARREL "MODIFIED CALIFORNIA SAMPLER")



Gordon Environmental, Inc.
Consulting Engineers

Log of Borehole No.: **B3**

Total Depth **150'**

Page **2** of **2**

Client: **DNCS PROPERTIES, LLC**

Project No.: **542.01.01**

DRAFT

| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | |
|---|----------------------------|--|---|--|--|--|
| NONE Ft. While Drilling (below ground surface) | N: 32.77692 | Date Started: 02-06-2013 | Drilling Co.: PRECISION SAMPLING | GEI Rep.: MLH | | |
| NONE Ft. at completion (below ground surface) | E: -103.70411 | Date Comp: 02-08-2013 | Rig Type: CME 85 | Drill Meth.: HSA, AIR ROTARY | | |
| water level data approximate | Elevation: 3840.23 | Location: DNCS SITE, LEA COUNTY SE/4, N/2, SEC 6, | Driller: JUAN BARRAZA | Sampling Meth.: SS/BR/CC/ARC/AC | | |
| | COORD REF SYS WGS84 | T18S, R33E, N.M.P.M. | Helper: TINO V. | | | |

| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | Rig Blow Counts/ft | Notes: |
|-----------------|-------------------|-----------------|--|--------------------|--|
| 80' | | | 70'-85', (CONTINUED) CLAYSTONE AND SILTSTONE; LIGHT RED (2.5YR 6/8), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | 180+ | BRASS RING SAMPLER BROKE DOWN-HOLE ; SMALL DAMAGED BRASS RING SAMPLE RECOVERED. DRILLHOLE CHECKED FOR WATER AFTER SITTING OVERNIGHT, NO WATER. |
| 85' | | | | 100+ | NEW "HAML" INSTALLED FOR SS SAMPLES |
| 90' | | | 85'-90', CLAYSTONE AND SILTSTONE; PALE RED (2.5YR 6/2), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | 100+ | |
| 95' | | | | 100+ | SOME MID-CALCITE VENEILS AND PARTING COATINGS NO MORE SPLIT-SPOON SAMPLING ONLY AIR-ROTARY CUTTINGS FROM 90.25' TO 150' BGS |
| 100' | | | 90'-110', CLAYSTONE AND SILTSTONE; LIGHT RED (2.5YR 7/8), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | |
| 105' | | | | | |
| 110' | | | 110'-115', CLAYSTONE AND SILTSTONE; LIGHT RED (2.5YR 7/6), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | |
| 115' | | | | | |
| 120' | | | 115'-125', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | |
| 125' | | | | | |
| 130' | | | | | |
| 135' | | | 125'-150'=TD, CLAYSTONE AND SILTSTONE; RED (2.5YR 4/8), AND VARIEGATED BROWN TO GREENISH LAYERS AND SPOTS (POORLY GRADED; MODERATELY INDURATED) | | |
| 140' | | | | | |
| 145' | | | | | DRILLHOLE CHECKED FOR WATER AFTER SITTING OVERNIGHT; NO WATER. NO WATER SATURATION OF ANY MATERIAL ON AUGERS PRIOR TO PLUGGING HOLE. |
| 150' | | | | TD=150' | |

KEY

BGS = BELOW GROUND SURFACE SS = SPLIT SPOON ARC = AIR ROTARY CUTTINGS AC = AUGER CUTTINGS CC = CONTINUOUS CORE
HSA = HOLLOW STEM AUGER BR = BRASS RING (SPLIT BARREL "MODIFIED CALIFORNIA SAMPLER")



Gordon Environmental, Inc.

Consulting Engineers

Log of Borehole No.: **B4**Total Depth **150'**

Page 1 of 2

Client: **DNCS PROPERTIES, LLC**Project No.: **542.01.01****DRAFT**

| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | | |
|---|--|--|----------------------------|--|---|-------------------------------------|--|
| NONE Ft. While Drilling (below ground surface) | | N: 32.77700° | COORD REF SYS WGS84 | Date Started: 02-08-2013 | Drilling Co.: PRECISION SAMPLING | GEF Rep.: -MLH- | |
| NONE Ft. at completion (below ground surface) | | E: -103.69465° | | Date Comp: 02-09-2013 | Rig Type: CME 85 | Drill Meth.: HSA, AIR ROTARY | |
| water level data approximate | | Elevation: 3968.2 | | Location: DNCS SITE, LEA COUNTY CENTRAL SEC 6, T18S, R33E, N.M.P.M. | Driller: JUAN BARRAZA | Sampling Meth.: SS/BR/CC/ARC | |
| | | | | | Helper: TINO V. | | |

| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | Rig Blow Counts/ft | Notes: |
|-----------------|-------------------|-----------------|---|--------------------|---|
| 0' | | | 0'-2' SAND, FINE AND SILT; BROWN (WINDBLOWN, LOOSE) | | |
| 5' | | | 2'-5', SAND; FINE, RED (2.5YR 4/6), (POORLY GRADED; POORLY TO MODERATELY INDURATED/CALICHEFIED) | | UNCONFORMITY CALCIFIED FROM 4' TO 40' |
| 10' | | | 5'-10', CALICHE AND SAND; FINE, WHITE (2.5YR 8/1), (POORLY GRADED; MODERATELY INDURATED) | 84+ | |
| 15' | | | 10'-15', CALICHE AND SAND; FINE, PINKISH WHITE (2.5YR 8/2), (POORLY GRADED; MODERATELY INDURATED) | 82+ | |
| 20' | | | 15'-20', CALICHE AND SAND; FINE, LIGHT REDDISH BROWN (2.5YR 6/4), (POORLY GRADED; MODERATELY INDURATED) | | NO SS SAMPLE COLLECTED |
| 25' | | | 20'-25', SAND; FINE, AND CALICHE, LIGHT REDDISH BROWN (2.5YR 7/3), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | 34 | |
| 30' | | | 25'-30', SAND; FINE, AND CALICHE, LIGHT REDDISH BROWN (2.5YR 7/4), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | 35 | |
| 35' | | | 30'-55', SAND; FINE, AND CALICHE, LIGHT REDDISH BROWN (2.5YR 6/4), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | 39 | |
| 40' | | | 30'-40', CALICHE AND SAND; FINE, PINKISH WHITE (2.5YR 8/2), (POORLY GRADED; MODERATELY INDURATED) | 90 | DUNE SAND? UNCONFORMITY ABUNDANT ROOT CISTS AND Voids |
| 45' | | | 30'-40', CALICHE AND SAND; FINE, AND GRAVEL TO 1"; PINK (2.5YR 8/3), (POORLY TO MODERATELY GRADED; MODERATELY INDURATED) | 84+ | |
| 50' | | | 30'-40', CALICHE, SAND; FINE, AND GRAVEL TO 1", PINKISH WHITE (2.5YR 8/2), (POORLY TO MODERATELY GRADED; MODERATELY INDURATED) | 93+ | |
| 55' | | | UNCONFORMITY | 70 | UNCONFORMITY |
| 60' | | | 50'-65', CLAYSTONE AND SILTSTONE; WITH CALICHE FRAGMENTS, AND ROUNDED GRAVEL TO 0.5" AT TOP; DARK REDDISH BROWN (2.5YR 3/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | 70+ | |
| 65' | | | | 64+ | |
| 70' | | | | 90+ | GOING TO AIR-ROTARY DRILLING FROM 65' TO 150' DEE. |
| 75' | | | 65'-75', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 4/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |

KEY

BGS = BELOW GROUND SURFACE SS = SPLIT SPOON ARC = AIR ROTARY CUTTINGS AC = AUGER CUTTINGS CC = CONTINUOUS CORE
HSA = HOLLOW STEM AUGER BR = BRASS RING (SPLIT BARREL MODIFIED CALIFORNIA SAMPLER)



Gordon Environmental, Inc.
Consulting Engineers

Log of Borehole No.: **B4**

Total Depth **150'**

Page **2** of **2**

Client: **DNCS PROPERTIES, LLC**

Project No.: **542.01.01**

DRAFT

| | | | | | | | |
|--|--|---|--|--|---|-------------------------------------|--|
| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | | |
| NONE Ft. While Drilling (below ground surface) | | N: 32.77700° | | Date Started: 02-08-2013 | Drilling Co.: PRECISION SAMPLING | GEI Rep.: MLH | |
| NONE Ft. at completion (below ground surface) | | E: -103.69465° | | Date Comp: 02-09-2013 | Rig Type: CME 85 | Drill Meth.: HSA, AIR ROTARY | |
| water level data approximate | | Elevation: 3968.2 | | Location: DNCS SITE, LEA COUNTY | Driller: JUAN BARRAZA | Sampling Meth.: SS/BR/CC/ARC | |
| | | COORD REF SYS WGS84 | | CENTRAL SEC 6, | | | |
| | | | | T18S, R33E, N.M.P.M. | | Helper: TINO V. | |

| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | Rig Blow Counts/ft | Notes: |
|-----------------|-------------------|-----------------|--|--------------------|---|
| 75' | | SS & BR | | | AIR ROTARY CUTTINGS ONLY, NO MORE AC, SS, OR BR SAMPLES |
| 80' | | | 75'-85', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 85' | | | | | |
| 90' | | | 85'-95', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 4/3) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; POORLY TO MODERATELY INDURATED) | | |
| 95' | | | | | |
| 100' | | | 95'-100', CLAYSTONE AND SILTSTONE; RED (2.5YR 5/6) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 105' | | | 100'-105', CLAYSTONE AND SILTSTONE; RED (2.5YR 5/8) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 110' | | | 105'-115', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/3) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 115' | | | | | |
| 120' | | | 115'-120', CLAYSTONE AND SILTSTONE; RED (2.5YR 5/6) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; POORLY TO MODERATELY INDURATED) | | |
| 125' | | | | | |
| 130' | | | 130'-130', CLAYSTONE AND SILTSTONE; RED (2.5YR 5/8) WITH SPARSE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 135' | | | 130'-135', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4) WITH TRACE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 140' | | | 135'-140', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/3) WITH TRACE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; POORLY TO MODERATELY INDURATED) | | |
| 145' | | | | | |
| 150' | | | 140'-150'=TD, CLAYSTONE AND SILTSTONE; LIGHT REDDISH BROWN (2.5YR 6/4) WITH TRACE VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | CHECKED BOREHOLE FOR WATER AFTER SITTING OVERNIGHT, NO WATER OBSERVED AUGER PULLING, NO SQUATTED MATERIAL ON AUGERS TO-150' |

KEY
BGS = BELOW GROUND SURFACE SS = SPLIT SPOON ARC = AIR ROTARY CUTTINGS AC = AUGER CUTTINGS CC = CONTINUOUS CORE
HSA = HOLLOW STEM AUGER BR = BRASS RING (SPLIT BARREL "MODIFIED CALIFORNIA SAMPLER")



Gordon Environmental, Inc.

Consulting Engineers

Log of Borehole No.: **B5**Total Depth **150'**Page **1** of **2**Client: **DNCS PROPERTIES, LLC**Project No.: **542.01.01****DRAFT**

| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | | |
|---|----------------------------|--|---|-------------------------------------|--|--|--|
| NONE Ft. While Drilling (below ground surface) | N: 32.78815' | Date Started: 02-10-2013 | Drilling Co.: PRECISION SAMPLING | GEI Rep.: MLH | | | |
| NONE Ft. at completion (below ground surface) | E: -103.69491' | Date Comp: 02-11-2013 | Rig Type: CME 85 | Drill Meth.: HSA, AIR ROTARY | | | |
| water level data approximate | Elevation: 3979.03 | Location: DNCS SITE, LEA COUNTY | Driller: JUAN BARRAZA | Sampling Meth.: SS/BR/CC/ARC | | | |
| | COORD REF SYS WGS84 | EAST CENTRAL SEC 31, | Helper: TINO V. | | | | |
| | | T17S, R33E, N.M.P.M. | | | | | |

| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | Rig Blow Counts/ft | Notes: |
|-----------------|-------------------|-----------------|--|--------------------|--|
| 0' | | | 0-3' SAND, FINE AND SILT; BROWN (POORLY TO MODERATELY INDURATED) | | "BEDROCK" SOIL HORIZON 0-3' BGS. MOST DARK SAND HAS BEEN REMOVED BY MINING FROM THIS LOCATION |
| 5' | | | 3'-5', CALICHE AND SAND; FINE, WHITE (5YR 8/1), (POORLY GRADED, MODERATELY INDURATED) | 100+ | DISCONFORMITY |
| 10' | | | 5'-10', CALICHE AND SAND; FINE, PINKISH WHITE (5YR 8/2), (POORLY GRADED; MODERATELY INDURATED) | 44 | STRONGLY CALICHERED FROM 3' TO 10' |
| 15' | | | 10'-20', SAND, FINE, AND CALICHE; LIGHT REDDISH BROWN (2.5YR 7/4), (POORLY GRADED; MODERATELY INDURATED) | 23 | |
| 20' | | | 20'-25', CALICHE AND SAND, FINE, AND GRAVEL TO 0.5"; PINKISH WHITE (5YR 8/2), (POORLY GRADED; MODERATELY INDURATED) | 42 | TRACE MnO ₂ STAINED SPOTS TO 30cm DIA. |
| 25' | | | | 29 | |
| 30' | | | | 36 | |
| 35' | | | 25'-45', SAND, FINE, CALICHE, GRAVEL AND CALCITE CLASTS TO 1"; PINK (5YR 7/4), (POORLY GRADED; MODERATELY INDURATED) | 100+ | MnO ₂ -CALICHE VEGETS, VENTIFACTS AND ROOT CASTS @ 35'-36" (UNCONFORMITY OR PEDOGENIC HORIZON?) |
| 40' | | | | 60 | |
| 45' | | | 45'-50', SAND, FINE, CALICHE AND GRAVEL TO 2"; LIGHT REDDISH BROWN (2.5YR 6/4), (POORLY GRADED; POORLY TO MODERATELY INDURATED) | 74+ | |
| 50' | | | 50'-55', CALICHE, SAND, FINE, AND GRAVEL TO 2"; PINKISH WHITE (2.5YR 8/2), (POORLY TO MODERATELY GRADED; MODERATELY INDURATED) | 88+ | |
| 55' | | | | 100+ | FAIRER WEIGHT PROBLEMS (7/11/13) |
| 60' | | | 55'-65', SAND, FINE, CALICHE, AND GRAVEL TO 2" TRACE CLAY AND SILT @ 64-65'; LIGHT REDDISH BROWN (2.5YR 7/3), (POORLY TO MODERATELY GRADED; MODERATELY INDURATED) | 100+ | |
| 65' | | | UNCONFORMITY | 83+ | DISCONFORMITY |
| 70' | | | 65'-75', CLAYSTONE AND SILTSTONE; WITH CALICHE FRAGMENTS; DARK REDDISH BROWN (2.5YR 3/3) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | 100+ | MnO ₂ -CALICHE VEGETS @ 65'-66' |
| 75' | | | | | GOING TO AIR-ROTARY DRILLING FROM 70' TO 150' BGS. |

| | | | | |
|----------------------------|--|---------------------------|---------------------|----------------------|
| BGS = BELOW GROUND SURFACE | SS = SPLIT SPOON | ARC = AIR ROTARY CUTTINGS | AC = AUGER CUTTINGS | CC = CONTINUOUS CORE |
| HSA = HOLLOW STEM AUGER | BR = BRASS RING (SPLIT BARREL "MODIFIED CALIFORNIA SAMPLER") | | | |



Gordon Environmental, Inc.
Consulting Engineers

Log of Borehole No.: **B5**

Total Depth **150'**

Page 2 of 2

Client: **DNCS PROPERTIES, LLC**

Project No.: **542.01.01**

DRAFT

| | | | | | | | |
|--|--|---|--|--|---|-------------------------------------|--|
| Water Level Data | | Location COORDS's and Elevation (NAVD88) | | Borehole Information | | | |
| NONE Ft. While Drilling (below ground surface) | | N: 32.78815' | | Date Started: 02-10-2013 | Drilling Co.: PRECISION SAMPLING | GEI Rep.: MLH | |
| NONE Ft. at completion (below ground surface) | | E: -103.69491' | | Date Comp: 02-11-2013 | Rig Type: CME 85 | Drill Meth.: HSA, AIR ROTARY | |
| water level data approximate | | Elevation: 3979.03 | | Location: DNCS SITE, LEA COUNTY EAST CENTRAL SEC 31, T17S, R33E, N.M.P.M. | | Sampling Meth.: SS/BR/CC/ARC | |
| | | COORD REF SYS WGS84 | | Driller: JUAN BARRAZA | | Helper: TINO V. | |

| Depth (ft. BGS) | Graphic Lithology | Sampling Method | Soil/Lithology Description | Rig Blow Counts/ft | Notes: |
|-----------------|-------------------|-----------------|---|--------------------|--------|
| 75' | | SS & BR | 75'-80', CLAYSTONE AND SILTSTONE; WEAK RED (2.5YR 4/2) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | 100+ | |
| 80' | | | | | |
| 85' | | | 80'-95', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 90' | | | | | |
| 95' | | | | | |
| 100' | | | 95'-105', CLAYSTONE AND SILTSTONE; RED (2.5YR 5/6) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 105' | | | | | |
| 110' | | | 105'-115', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 115' | | | | | |
| 120' | | | 155'-120', CLAYSTONE AND SILTSTONE; LIGHT REDDISH BROWN (2.5YR 6/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 125' | | | 120'-125', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/3) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 130' | | | 125'-135', CLAYSTONE AND SILTSTONE; LIGHT RED (2.5YR 6/6) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 135' | | | 135'-140', CLAYSTONE AND SILTSTONE; REDDISH BROWN (2.5YR 5/4) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 140' | | | | | |
| 145' | | | 140'-150'=TD, CLAYSTONE AND SILTSTONE; RED (2.5YR 5/6) WITH SOME VARIEGATED BROWN-PURPLE AND GREEN LAYERS AND SPOTS, (POORLY GRADED; MODERATELY INDURATED) | | |
| 150' | | | | | |

CHECKED DRILLHOLE FOR WATER AFTER SITTING OVERNIGHT, NO WATER OBSERVED AUGER PULLING, NO SATURATED MATERIAL ON AUGERS TO 150'

KEY
BCS = BELOW GROUND SURFACE SS = SPLIT SPOON ARC = AIR ROTARY CUTTINGS AC = AUGER CUTTINGS CC = CONTINUOUS CORE
HSA = HOLLOW STEM AUGER BR = BRASS RING (SPLIT BARREL "MODIFIED CALIFORNIA SAMPLER")



Monitor Well/Piezometer Log

SITE NAME AND LOCATION: name and location

DNCS Properties
Hubbs, NM

NORTHING 32° 46' 54.1"
EASTING: -103° 42' 37.1"
DATUM: amsl NAD 83
ELEVATION:

DRILL RIG: CMF-75
ANGLE: 90

BEARING: -

DRILLING METHOD: Hollow Stem Auger 6 1/2" O.D.

SAMPLING METHOD: 1.5" ID Split Spoon
1.5" ID Pressure Ring

WATER LEVEL 12.00
TIME 12:00
DATE 6/12/2013
CASING DEPTH 74'

BORING NO. B-6

SHEET 1 of 2

DRILLING

START FINISH

0920 11:50

DATE DATE

6/11 6/11

SURFACE CONDITIONS: Dry, Wind blown fine sand & shrub/grass cover. New Caliche cover Road.

| DEPTH IN FEET (ELEVATION) | WELL Sample COMPLETION DETAILS | SAMPLE NUMBER AND DESCRIPTION OF MATERIAL (i.e., angularity, moisture, HCL reaction, cementation, max. particle size, gravel/cobble hardness, odor, interbeds, lam.) | % OVERSIZE ¹ | % GRAVEL ² | % SAND ² | % FINES ² | COLOR | CONSISTENCY ³ / CEMENTATION ⁴ | PERMEABILITY (mp, l, m, h) | Blow OTHER TESTS ⁵ Counts |
|---------------------------|--------------------------------|---|-------------------------|-----------------------|---------------------|----------------------|-------|---|----------------------------|--------------------------------------|
| 0-2 | | Silty sand, Fine Wind Blown Red (2.57R4/6) Dry to 1", then slightly moist | | | | | | | | |
| 2-7 | | Sand, Fine, with Caliche + Trace Gravels to 1", Light Brown (7.5YR6/4) Dry - Poorly Graded, Partly to Mod. Indurated | | | | | | | | 23 22 |
| 7-13 | Split Spoon | Sand, Fine, with Caliche + Trace Gravel to 1". Reddish Brown, (7.5YR6/6) Poorly Graded, Partly to moderately Indurated / Caliche Fred. Dry. | | | | | | | | 20 43 46 |
| 13-27 | Split Spoon | Sand, Fine, with Caliche + Some Gravel to 1". Reddish Yellow (7.5YR7/4) Well Graded, Moderately Indurated / Caliche Fred. Dry. | | | | | | | | 23 50+ |
| 27-48 | Split Spoon | Sand, Fine, with Silt + Caliche, Trace Gravels up to 1". Light Brown (7.5YR6/4) Poorly Graded, Poorly Indurated. Dry. | | | | | | | | 21 32 31 5 5 11 |
| 48-55 | Split Spoon | | | | | | | | | 23 29 53 |
| 55-65 | Split Spoon | | | | | | | | | 23 29 53 |

DRILLING CONTRACTOR Precision Sampling - Alex Bonham

LOGGED BY: Michael Peterson

DATE: 6/11/2013

JOB NO. 1300414

FILE NAME:



**Golder
Associates**

Monitor Well/Piezometer Log

SITE NAME AND LOCATION: name and location

DNCS Gordon
Environmental
Hubbs, NM

NORTHING

EASTING:

DATUM: amsl

ELEVATION:

DRILL RIG: CME75

ANGLE: 90

BEARING: -

DRILLING METHOD: 6 1/2" OD HSA

SAMPLING METHOD: 1.5" ID Split Spoon
1.5" ID Brass Ring

BORING NO.

B-6

SHEET

2 of 2

DRILLING

START FINISH

WATER LEVEL

TIME

DATE

CASING DEPTH

9:20 11:00

DATE DATE

6/11 6/12

SURFACE CONDITIONS:

| DEPTH IN FEET (ELEVATION) | WELL SAMPLES COMPLETION DETAILS | SAMPLE NUMBER AND DESCRIPTION OF MATERIAL (i.e., angularity, moisture, HCL reaction, cementation, max. particle size, gravel/cobble hardness, odor, interbeds, lam.) | % OVERSIZE ¹ | % GRAVEL ² | % SAND ² | % FINES ² | COLOR | CONSISTENCY ² CEMENTATION ² | PLASTICITY (mp, l, m, h) | OTHER TESTS ² Counts |
|------------------------------|---------------------------------------|---|-------------------------|-----------------------|---------------------|----------------------|-------|--|-----------------------------|------------------------------------|
| 37 | | 27-47 Sand, Fine, with silt & Caliche, Trace gravels up to 1". Light Brown (2.5 YR 6/4) Poorly Indurated, Dry - * Finely layered (2-5 mm) horizons beginning 35' similar soil characteristics. | | | | | | | | 18 19 14 |
| 48 | 40-41.5 Split Spoon | | | | | | | | | 10 10 11 |
| | 45-46.5 Split Spoon | | | | | | | | | 22 50+ |
| | 50- 51.5 Split Spoon | 48-67 Sand, Well Graded w/ Caliche - Trace Gravels up to 1". White (2.5 Y 8/1) Well Indurated / Calichified. Dry - * Decreased Penetration Rate | | | | | | | | 32 21 23 |
| | 55-56.5 Split Spoon | | | | | | | | | 12 28 8+ |
| | 60-61.5 Split Spoon | | | | | | | | | 22 50+ |
| | 65-66.5 Split Spoon | Unconformity | | | | | | | | 50+ |
| 67 | | 67-75 Claystone and Siltstone, with Caliche fragments, Dark Reddish Brown (2.5 YR 3/3) Poorly to moderately Graded, Moderately Indurated, Dry - * No Recovery from Brass Ring Sample, Split Spoon sample | | | | | | | | 50+ |
| | 70-70.5 Split Spoon | | | | | | | | | 70+ |
| | 70.5-71 Brass Ring | | | | | | | | | |
| 75 | | - 75' Total Depth | | | | | | | | |

DRILLING CONTRACTOR Precision Sampling - Alex Benham

LOGGED BY: Michael Petersen

DATE: 6/11 - 6/12/2013

JOB NO. 1300444

FILE NAME:

ATTACHMENT II.8.A
Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico

ATTACHMENT A-2
SELECTED WELL DATA FROM WELLS IN THE VICINITY OF THE DNCS SITE
(GEOHYDROLOGY ASSOCIATES, 1978)

COLLECTION OF HYDROLOGIC DATA
EASTSIDE ROSWELL RANGE EIS AREA

NEW MEXICO

by

**Geohydrology
Associates, Inc.**

for

BUREAU OF LAND MANAGEMENT


Denver, Colorado

Contract No. YA-512-CT7-217

1201 Childers Dr., N. E., Albuquerque, N. M. 87112
505-293-6971

3225 Candelaria Rd., N.E., Albuquerque, N.M. 87107
505-345-5713

June 1978

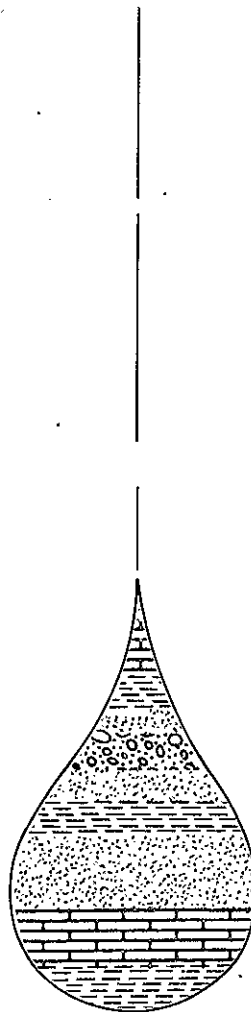

COLLECTION OF HYDROLOGIC DATA
EASTSIDE ROSWELL RANGE EIS AREA
NEW MEXICO

by
GEOHYDROLOGY ASSOCIATES, INC.
Albuquerque, New Mexico

for
BUREAU OF LAND MANAGEMENT
Denver, Colorado

Contract No. YA-512-CT7-217

June 1978

CONTENTS

| | <u>Page</u> |
|--|-------------|
| INTRODUCTION..... | 1 |
| SURFACE WATER..... | 4 |
| Drainage Basins..... | 4 |
| Climatic Conditions..... | 7 |
| Rainfall-Run-off Relationships..... | 8 |
| Effects of Ground Cover on Floods..... | 12 |
| Flood Projections..... | 16 |
| Chemical Quality..... | 26 |
| Human Health Standards..... | 28 |
| Standards of Livestock Water Use..... | 29 |
| Standards for Irrigation Use..... | 29 |
| GROUND WATER..... | 36 |
| Water-Table Contour Maps..... | 38 |
| Chaves County..... | 38 |
| Eddy County..... | 40 |
| Lea County..... | 40 |

| | |
|---|----|
| Depth-to-Water Maps..... | 41 |
| Chaves County..... | 42 |
| Eddy County..... | 42 |
| Lea County..... | 43 |
| Water-Level Fluctuations..... | 44 |
| Well Yields..... | 52 |
| Yields less than five gpm..... | 54 |
| Yields of five to ten gpm..... | 54 |
| Yields of 10 to 100 gpm..... | 55 |
| Yields greater than 100 gpm..... | 55 |
| Springs in the Eastside Roswell Area..... | 56 |
| Chemical Quality..... | 58 |
| SUMMARY..... | 78 |
| BIBLIOGRAPHY..... | 79 |
| APPENDIX A..... | 98 |

ILLUSTRATIONS

| | <u>Page</u> |
|---|-------------|
| Figure 1.--System of numbering wells in New Mexico..... | 3 |
| 2.--Eastside Roswell area showing major drainage basins..... | 5 |
| 3.--Map of part of Chaves County showing integrated drainage basins..... | (in pocket) |
| 4.--Map of part of Eddy County showing integrated drainage basins..... | (in pocket) |
| 5.--Map of Lea County showing integrated drainage basins..... | (in pocket) |
| 6.--Mean annual precipitation in inches for Eastside Roswell area..... | 9 |
| 7.--Relationship between run-off and annual precipitation... | 13 |
| 8.--Potential annual run-off, in inches, for Eastside Roswell area..... | 15 |
| 9.--Surface-water stations maintained by U. S. Geological Survey..... | 27 |
| 10.--Distribution of major constituents in surface-water samples from the Eastside Roswell area..... | 33 |
| 11.--Water-table contour map of part of Chaves County..... | (in pocket) |
| 12.--Water-table contour map of part of Eddy County..... | (in pocket) |
| 13.--Water-table contour map of Lea County..... | (in pocket) |
| 14.--Depth-to-water map of part of Chaves County..... | (in pocket) |
| 15.--Depth-to-water map of part of Eddy County..... | (in pocket) |
| 16.--Depth-to-water map of Lea County..... | (in pocket) |

| | |
|--|----|
| Figure 17.--Estimated yields from wells in the Eastside Roswell area..... | 53 |
| 18.--Chemical-quality sample points in Chaves County.....(in pocket) | |
| 19.--Chemical-quality sample points in Eddy County.....(in pocket) | |
| 20.--Chemical-quality sample points in Lea County.....(in pocket) | |
| 21.--Ion distribution in samples from the Rustler Formation..... | 71 |
| 22.--Ion distribution in samples from Triassic rocks..... | 72 |
| 23.--Ion distribution in samples from the Ogallala aquifer.. | 74 |
| 24.--Ion distribution in samples from alluvial aquifers..... | 75 |

TABLES

| | <u>Page</u> |
|--|-------------|
| Table 1.--Average annual precipitation (since 1900) for stations in and near the Eastside area.... | 10 |
| 2.--Summary of regression equations relating floods of various recurrences to active channel widths..... | 18 |
| 3.--Streamflow characteristics..... | 20 |
| 4.--Water-level records of selected observation wells..... | 45 |
| 5.--Records of springs in Eastside Roswell area... | 57 |
| 6.--Chemical analyses of water..... | 60 |

LEA COUNTY

Records of wells from Lea County, New Mexico

| Location | Well Status | Altitude (feet) | Depth of Well(ft.) | Depth to Water(ft.) | Aquifer | Date of Measurement | Remarks |
|----------------|----------------------|--------------------|-----------------------|------------------------|---------|------------------------|---------|
| 16.38.30.211 | Irrigation | | 118.0 | 57.48 | Og11 | Jan.7,1975 | |
| 30.31111 | Irrigation | 3755 | | 56.29 | Og11 | Feb.17,1971 | |
| 30.41334 | Irrigation | 3749 | | 58.74 | Og11 | Feb.17,1971 | |
| 31.24434 | Used windmill | 3737 | | 66.44 | Og11 | Feb.18,1966 | |
| 32.42113 | Irrigation | 3722 | | 81.72 | Og11 | Feb.17,1971 | |
| 34.131 | Irrigation | | 140.0 | 61.22 | Og11 | Mar.18,1958 | |
| 34.131 | Irrigation | | | 97.42 | Og11 | Jan.7,1975 | |
| 35.110 | Used well | | | 41.33 | Og11 | Jan.6,1952 | |
| 35.124114 | Irrigation | 3693 | | 62.92 | Og11 | Feb.11,1971 | |
| 35.21112 | Irrigation | 3694 | | 62.34 | Og11 | Feb.11,1971 | |
| 35.33122 | Irrigation | 3702 | | 71.68 | Og11 | Feb.11,1971 | |
| 16.39. 5.31132 | Abandoned irrigation | 3702 | | 62.98 | Og11 | Feb.12,1971 | |
| 6.31111 | Irrigation | 3704 | | 45.09 | Og11 | Feb.12,1971 | |
| 7.33132 | Irrigation | 3695 | | 54.85 | Og11 | Feb.12,1971 | |
| 17.311142 | Irrigation | 3685 | | 69.03 | Og11 | Feb.11,1971 | |
| 17.34422 | Irrigation | 3680 | | 75.90 | Og11 | Feb.11,1971 | |
| 19.133121 | Irrigation | 3684 | | 57.76 | Og11 | Feb.11,1971 | |
| 20.13311 | Irrigation | 3673.02 | 132.0 | 54.74 | Og11 | Feb.26,1963 | |
| 20.31111 | Irrigation | 3673 | | 60.50 | Og11 | Feb.26,1963 | |
| 20.41143 | Open cased hole | | | 68.84 | Og11 | Feb.11,1971 | |
| 29.23332 | Irrigation | 3678.7 | 172.0 | 83.54 | Og11 | Jan.7,1975 | |
| 29.343344 | Irrigation | 3681 | | 77.22 | Og11 | Feb.11,1971 | |
| 30.11413 | Irrigation | 3682 | | 60.30 | Og11 | Feb.11,1971 | |
| 30.43424 | Abandoned stock | 3661 | | 51.89 | Og11 | Feb.15,1961 | |
| 17.32. 1.32343 | Irrigation | 4225 | | 165.85 | Og11 | Mar.15,1966 | |

Records of wells from Lea County, New Mexico

| Location | Well Status | Altitude (feet) | Depth of Well(ft.) | Depth to Water(ft.) | Aquifer | Date of Measurement | Remarks |
|----------------|---------------------|--------------------|-----------------------|------------------------|---------|------------------------|------------------|
| 17.32. 1.32343 | Used oil test | 4225 | | 173.19 | Og11 | Mar.10,1966 | |
| 2.433 | Industrial/domestic | 4240 | 200 | 60 | Og11 | 1948 | Yield:50gpm(est) |
| 2.434 | Industrial/domestic | 4240 | 192 | 60 | Og11 | Jun.1,1950 | |
| 2.434343 | Industrial | 4195 | | 148.33 | Og11 | Mar.14,1961 | |
| 2.443 | Industrial/domestic | | 190 | | Og11 | | Yield:50gpm(est) |
| 3.13443 | Unused industrial | 4239 | | 168.14 | Og11 | Feb.10,1966 | |
| 3.140 | Industrial | | | | Og11 | | |
| 3.320 | None | 4250 | | 175.6 | Og11 | Jul.21,1954 | |
| 3.32114 | Industrial | 4232 | | 162.21 | Og11 | Feb.8,1971 | Oil test |
| 3.43333 | Industrial | 4200 | | 136.89 | Og11 | Feb.8,1971 | |
| 4.442 | None | 4180 | | 82.9 | Qta1 | Jun.3,1954 | |
| 11.231 | Industrial/domestic | 4180 | 139 | | Og11 | | |
| 11.233 | Industrial/domestic | 4200 | 140 | 70 | Og11 ? | Sep.20,1947 | Yield:9gpm(est) |
| 11.34332 | Open hole | 4096 | | 47.11 | Og11 | Feb.8,1971 | |
| 11.411 | Industrial/domestic | 4170 | 200 | 70 | Og11 ? | Jun.15,1946 | Yield:90gpm(est) |
| 11.411 | Industrial/domestic | | 130 | 70 | Og11 ? | Sep.23,1947 | Yield:50gpm(est) |
| 12.44414 | Abandoned stock | 4168 | | 120.13 | Og11 | Feb.11,1966 | |
| 14.12121 | Domestic | 4092 | | 31.53 | Og11 | Feb.8,1971 | |
| 17.33. 3.14134 | Unused | 4184 | | 146.98 | Og11 | Feb.14,1966 | |
| 4.241441 | Oil test | 4183 | | 159.58 | Og11 | Feb.18,1971 | |
| 4.44322 | Unused | 4179 | | 149.72 | Og11 | Feb.6,1961 | |
| 4.4444 | Shot hole | 4173 | 152.0 | 145.20 | Og11 | Mar.14,1961 | |
| 5.22221 | Industrial | 4198 | | 162.20 | Og11 | Mar.31,1971 | |
| 6.11111 | Used floodwell | 4198 | 310.0 | 209.87 | Og11 | Mar.31,1971 | |
| 6.42411 | Unused | 4223 | | 181.94 | Og11 | Feb.18,1971 | |

Records of wells from Lea County, New Mexico

| Location | Well Status | Altitude (feet) | Depth of Well(ft.) | Depth to Water(ft.) | Aquifer | Date of Measurement | Remarks |
|-----------------|----------------------|--------------------|-----------------------|------------------------|---------|------------------------|---------|
| 17.33. 7.141221 | Open hole | 4234 | | 192.54 | Og11 | Feb.15,1971 | |
| 7.323221 | Open hole | 4229 | | 188.61 | Og11 | Feb.15,1971 | |
| 9.342113 | Open cased hole | 4191 | | 171.39 | Og11 | Feb.15,1971 | |
| 12.24333 | Used windmill | 4118 | | 122.79 | Og11 | Feb.16,1971 | |
| 13.341 | Observation | 4124 | 252 | 165.46 | Og11 | Jan.8,1975 | |
| 13.434 | Industrial | 4123 | | 175.54 | Og11 | Jan.17,1961 | |
| 16.24242 | Stock | 4176 | | 165.43 | Og11 | Feb.11,1966 | |
| 18.22133 | Domestic | 4216 | | 182.83 | Og11 | Feb.15,1971 | |
| 18.322 | Industrial/domestic | 4230 | 220 | | Og11 | | |
| 18.3223 | Industrial | 4224 | | 196.59 | Og11 | Mar.13,1961 | |
| 20.221443 | Open hole | 4165 | 160.0 | 147.39 | Og11 | Mar.14,1961 | |
| 20.24143 | Used windmill | 4173 | | 163.45 | Og11 | Feb.15,1971 | |
| 22.43233 | Used windmill | 4140 | | 155.17 | Og11 | Feb.16,1971 | |
| 23.3132 | Open cased hole | 4143 | | 157.62 | Og11 | Feb.16,1971 | |
| 25.244 | Industrial | | 230.0 | 140.07 | Og11 | Jan.3,1967 | |
| 26.422 | Abandoned industrial | 4125 | 200.3 | 162.35 | Og11 | Sep.7,1956 | |
| 28.110 | None | 4185 | 241 | 198.0 | Og11 | May 11,1954 | |
| 29.222221 | Industrial | 4188 | | 201.35 | Og11 | Mar.14,1961 | |
| 29.34411 | Used oil test | 4044 | | 61.43 | Og11 | Feb.16,1971 | |
| 30.12432 | Domestic | 4053 | | 69.14 | Og11 | Feb.16,1971 | |
| 33.4224 | Open cased hole | 4082 | | 130.96 | Og11 | Feb.16,1971 | |
| 17.34. 2.1310 | Used windmill | 4057 | | 85.94 | Og11 | Feb.16,1971 | |
| 2.343442 | Abandoned | 4048 | | 86.15 | Og11 | Feb.16,1971 | |
| 4.4320 | Used windmill | 4079 | | 99.79 | Og11 | Feb.16,1971 | |
| 7.213242 | Open cased hole | 4123 | | 130.33 | Og11 | Feb.16,1971 | |

Records of wells from Lea County, New Mexico

| Location | Well Status | Altitude (feet) | Depth of Well(ft.) | Depth to Water(ft.) | Aquifer | Date of Measurement | Remarks |
|----------------|----------------------|--------------------|-----------------------|------------------------|---------|------------------------|---------|
| 17.38.21.41211 | Irrigation | 3682 | 112.0 | 48.23 | Og11 | Feb.3,1971 | |
| 23.111141 | Irrigation | 3673.9 | | 48.0 | Og11 | Aug.3,1971 | |
| 27.133 | Irrigation | | 125.0 | 33.92 | Og11 | Jan.23,1962 | |
| 30.113 | Used well | | | 37.10 | Og11 | Jan.11,1957 | |
| 30.12111 | Irrigation | 3704 | | 56.97 | Og11 | Feb.3,1971 | |
| 30.312 | | | 56.0 | 41.12 | Og11 | May 22,1953 | |
| 31.21111 | Irrigation | 3691 | | 56.97 | Og11 | Feb.3,1971 | |
| 31.31111 | Irrigation | | 110.0 | 50.32 | Og11 | Jan.7,1975 | |
| 31.41422 | Irrigation | 3684 | | 59.61 | Og11 | Aug.3,1971 | |
| 32.232432 | Irrigation | 3689 | | 66.90 | Og11 | Feb.3,1971 | |
| 34.113 | Irrigation | 3660 | 126.0 | 48.18 | Og11 | Jan.7,1975 | |
| 35.14413 | Irrigation | 3659 | | 56.93 | Og11 | Feb.4,1971 | |
| 36.212 | Irrigation | | | 68.37 | Og11 | Jan.23,1962 | |
| 17.39.18.13314 | Used windmill | 3674 | | 78.07 | Og11 | Feb.3,1971 | |
| 18.33242 | Irrigation | 3663 | | 64.04 | Og11 | Feb.3,1971 | |
| 19.31332 | Abandoned stock | 3648 | | 50.04 | Og11 | Feb.22,1966 | |
| 30.23444 | Abandoned irrigation | 3657 | 165.0 | 66.20 | Og11 | Feb.22,1966 | |
| 31.42121 | Irrigation | 3640 | | 64.39 | Og11 | Feb.4,1971 | |
| 32.111 | Irrigation | | | 87.78 | Og11 | Jan.6,1970 | |
| 32.41322 | Irrigation | 3642 | | 80.17 | Og11 | Feb.4,1971 | |
| 18.32.16.22433 | Uncased open hole | 3793 | 100 | 84.18 | Og11 | Mar.18,1968 | |
| 20.13311 | Domestic | 3470 | 270.0 | 179.35 | Trcl | Feb.23,1971 | |
| 22.32322 | Oil test | 3763 | | 434.41 | Trcl | Apr.6,1971 | |
| 34.22241 | Windmill | 3721 | | 117.46 | Trcl | Apr.6,1971 | |
| 18.33. 3.34133 | Open cased hole | 4015 | | 60.10 | Qta1 | Apr.5,1966 | |

Records of wells from Lea County, New Mexico

| Location | Well Status | Altitude (feet) | Depth of Well(ft.) | Depth to Water(ft.) | Aquifer | Date of Measurement | Remarks |
|----------------|-------------------|--------------------|-----------------------|------------------------|---------|------------------------|---------|
| 18.33. 3.343 | Domestic/stock | 4012 | 64 | 59.18 | Qta1 | Feb.19,1971 | |
| 10.23244 | Domestic | 4005 | 75 | 41.64 | Qta1 | Feb.9,1971 | |
| 10.44211 | Stock | 3985 | 60 | 41.64 | Og11 | Feb.9,1971 | |
| 11.4433 | Irrigation | 3986 | | 42.40 | Qta1 | Feb.9,1971 | |
| 12.44211 | Windmill | 4089 | | 137.48 | Qta1 | Feb.5,1971 | |
| 13.13144 | Open cased hole | 3968 | | 31.85 | Qta1 | Feb.8,1971 | |
| 13.44244 | Open cased hole | 3973 | | 46.66 | Qta1 | Feb.8,1971 | |
| 14.111 | None | 3965 | 40.0 | 35.8 | Qta1 | Jun.3,1954 | |
| 14.1114 | Windmill | 3976 | | 35.20 | Qta1 | Feb.9,1971 | |
| 14.11140 | Stock | 3976 | 46.0 | 35.84 | Qta1 | Mar.6,1968 | |
| 19.142 | Stock | 3820 | | 140+ | Trsc ? | Dec.9,1958 | |
| 23.23140 | Open cased hole | 3881 | 58 | 45.65 | Qta1 | Feb.9,1971 | |
| 34.133 | None | 3760 | 200.0 | 177.4 | Trsc | Dec.9,1958 | |
| 18.34. 1.12222 | Industrial | 3991 | | 79.70 | Og11 | Mar.6,1961 | |
| 2.223333 | Industrial | 4009 | | 98.03 | Og11 | Feb.4,1971 | |
| 4.11124 | Open cased hole | 4064 | | 126.78 | Og11 | Feb.4,1971 | |
| 8.23213 | Windmill | 4042 | | 104.20 | Og11 | Feb.4,1971 | |
| 11.43212 | Industrial | 4000 | 211.0 | 110.78 | Og11 | Feb.23,1971 | |
| 12.42333 | Industrial | 3982 | 204.0 | 111.01 | Og11 | Feb.19,1971 | |
| 15.24130 | Windmill | 4015 | | 103.28 | Og11 | Feb.5,1971 | |
| 18.413212 | Open cased hole | 4076 | | 143.30 | Og11 | Feb.5,1971 | |
| 20.323323 | Windmill | 4015 | | 98.92 | Og11 | Feb.5,1971 | |
| 20.323333 | Domestic/stock | 4020 | 111.0 | 100.19 | Og11 | Mar.6,1968 | |
| 22.343 | | | | 109.92 | Og11 | Jan.8,1975 | |
| 25.13111 | Uncased shot hole | 3977 | | 94.88 | Qta1 | Mar.9,1961 | |

ATTACHMENT II.8.A
Proposal for Vadose Zone Monitoring
DNCS Environmental Solutions
Lea County, New Mexico

ATTACHMENT A-3
NEW MEXICO OFFICE OF THE STATE ENGINEER WELL RECORDS FOR
WELLS IN THE VICINITY OF THE DNCS SITE

ATTACHMENT A-3
Records of Wells in the Vicinity of the DNCS Site
DNCS Environmental Solutions

| Owner or OCD Designation | OSE Permit Number | Location PLS | Location Lat D.ddd | Location Long D.ddd | Use | LS Elev | TD | WL | WL Elev. | Date | WBZ | Top WBZ | Bottom WBZ | WBZ thickness | Trc top | Trc elev | Tsr | Driller Yield | Comments or source |
|---|-------------------|-----------------|--------------------|---------------------|----------|----------|--------------------------------|---------|----------|------------|--------|---------|------------|---------------|--------------|----------|-----|---------------|-----------------------------|
| Water Flood Assoc Inc: #2 Mal 2-127-2 | L03980 | 17.32.1.22233 | | | flood | 4251 | 270 | 200 | | 3/6/1960 | To/Qal | 210 | 265 | 70 | 265 | 3986 | | | OSE Well Record |
| Water Flood Assoc Inc: #2 Mal 2-127-2 | L03980-s | 17.32.1.42213 | | | SRO | 4242 | 255 | 179 | 4063 | 9/21/1962 | To/Qal | 205 | 250 | 76 | 250 | 3992 | | | OSE Well Record |
| Maljamar Repressuring Ag. #5 | L04019 | 17.32.2.43424 | | | SROO | 4195 | 182 | 126 est | | 6/6/1948 | To/Qal | 126 | 180 | | 180 | 4015 | | | OSE Well Record |
| Maljamar Repressuring Ag. #6 | L04020 | 17.32.1.43343 | | | SROO | 4195 | 200 | 100 est | | 6/2/1950 | To/Qal | 139 | 195 | | 195 | 4000 | | 100 | OSE Well Record |
| Maljamar Repressuring Ag. #7 | L04021 | 17.32.2.44335 | | | SROO | 4203 | 190 | 160 est | | 6/14/1950 | To/Qal | 160 | 185 | | 185 | 4018 | | 100 | OSE Well Record |
| Mescalero Ridge Water Coop | L04021-s | 17.32.3.23422 | | | PS | 4282 | 260 | 180 est | | 1/21/2002 | To/Qal | 180 | 260 | | 257 | 4025 | | | OSE Well Record |
| Chevron: Maljamar Grayburg Unit #12 | | 17.32.3.4323334 | | | OCD | 4284 | casing to 1384, redbeds to 990 | | | | | | | | 150 | 4134 | | | OCD Record |
| Chevron: Maljamar Grayburg Unit #14 | | 17.32.3.44300 | | | OCD | 4285 | casing to 1275, redbeds to 990 | | | | | | | | 1157 2907 | | | | OCD Record |
| BE Pashall | L04038 | 17.32.1.32343 | | | com/dom | 4225 | 225 | 175 | | 3/3/1960 | To/Qal | 192 | 224 | 50 | 224 | 4001 | | | OSE Well Record |
| Larry Wooton | No permit no | 17.32.10.122 | | | dom | 4186 | 156 | 132 | | 2/6/1959 | To/Qal | 132 | 156 | 24 | 156 est | | | | OSE Well Record |
| George Kenemore | RA 8855 | 17.32.10.11421 | | | dom | 4153 | 158 | dry | | 8/4/1994 | | | | 0 | 157 | 3996 | | | OSE Well Record |
| Maljamar Coop Repressuring Ag. | L00051-2 | 17.32.11.23142 | | | SROO | 4142 | 140 | NA | | 9/10/1947 | To/Qal | NA | NA | 0 | 131 | 4011 | | 100 | OSE Well Record |
| Conoco Phillips | No permit no | 17.32.21.300 | | | monitor | 4009 est | 125 | dry | | 5/15/2007 | | | | 0 | TD in To/Qal | | | | OSE Well Record |
| Conoco Oil MCA Battery 4 #189 | | 17.32.26.41000 | 32.803679 | 103.735041 | OCD | 3965 | 1024 Log, cased to 1062 | | | | Trc | 710 | 850 | 0 | 80 | 3885 | | | OCD Record 5/11/78 |
| Flo CO2 Inc | RA 10175 | 17.32.28.12 | 32.81102 | 103.773641 | dom | 3999 | 158 | 87 est | 3912 | 2/4/2002 | To/Qal | 87 | 124 | 71 | TD in To/Qal | | | | OSE Well Record |
| Conoco Oil MCA Battery 4 #109 | | 17.32.29.11000 | | | OCD | 3937 | casing to 873 | | | | | | | | 70 | 3867 | | | OCD Record 5/11/78 |
| Conoco Oil MCA Battery 4 #154 | | 17.32.29.32000 | | | OCD | 3984 | casing to 860 | | | | | | | | 105 | 3879 | | | OCD Record |
| Conoco Oil MCA Battery 4 #170 | | 17.32.29.32000 | | | OCD | 3933 | casing to 990 | | | | | | | | 55 | 3878 | | | OCD Record |
| Conoco Oil MCA Battery 4 #214 | | 17.32.29.33000 | | | OCD | 4091 | casing to 1050 | | | | | | | | 214 | 3877 | | | OCD Record 5/11/78 |
| Conoco Oil MCA Battery 4 #163 | | 17.32.30.13000 | 32.807566 | 103.812556 | OCD | 3895 | casing to 870, redbeds to 675 | | | | Trc | 575 | 580 | | 50 | 3845 | | | OCD Record 5/11/78 |
| | | | | | | | anyhdrite 675-810 | | | | Pr | 810 | 820 | | | | | | Rustler FM? |
| Conoco Oil MCA Battery 1 #218 | | 17.32.30.33000 | | | OCD | | casing to 1018, redbeds to 590 | | | | | 545 | 590 | | 50 | | | | OCD Record |
| Continental Oil Pearsall BX #2 | | 17.32.34.24111 | | | OCD | 3952 | casing to 3515, redbeds to 792 | | | | | | | | 64 | 3888 | | | OCD Record |
| Warton Drilling Co | L03750 | 17.33.1.140 | | | OWD | 4150 | 180 | 150 | | 12/21/1957 | To/Qal | 150 | 180 | 30 | | | | | OSE Well Record |
| Denver Drilling Company | L03782 | 17.33.2.444 | | | OWD | 4155 | 183 | 152 | | 2/6/1958 | To/Qal | 151 | 183 | 31 | | | | | OSE Well Record |
| Yates Petroleum | L00010.212 | 17.33.2.44423 | 32.857521 | 103.626451 | OWFR | 4155 | 273 | 168 | 3987 | 7/7/1994 | To/Qal | 168 | 268 | 105 | 268 | 3887 | | 120 | OSE Well Record |
| Carper Co: Daya Operating State B No. 2 | L04935 | 17.33.2.120 | | | OWD | 4167 | 204 | 162 | | 7/12/1962 | To/Qal | 162 | 201 | 42 | | | | | OSE Well Record |
| Lomax Drilling Co | L03012 | 17.33.3.140 | | | Oil | 4182 | 210 | 155 | | 11/1/1955 | To/Qal | 186 | 198 | 55 | 198 | 3984 | | | OSE Well Record |
| Conoco #2 Caprock 2-174-25 | L03528-s-3 | 17.33.3.1443 | | | OWD | 4183 | 271 | 155 | | 12/12/1968 | To/Qal | 150 | 265 | 116 | 265 | 3918 | | | OSE Well Record |
| Maljamar Coop #1 Maljamar 2-137-1 | L03528 | 17.33.4.44322 | | | OWD | 4179 | 265 | 158 | | 12/11/1957 | To/Qal | 160 | 225 | 107 | 240 | 3939 | | | OSE Well Record |
| Yucca Water Co | L03598-x | 17.33.5.22220 | | | SR | 4198 | 272 | 160 | | 6/25/1959 | To/Qal | 160 | 260 | 112 | 260 | 3938 | | | OSE Well Record |
| Yucca Water Co | L03598 | 17.33.6.11110 | | | SRO | 4243 | 287 | 210 | | 6/18/1962 | To/Qal | 230 | 280 | 77 | 280 | 3963 | | | OSE Well Record |
| RE Paschall | L04524 | 17.33.6.440 | | | dom | 4227 | 100 | 90 | | 9/28/1960 | To/Qal | -- | -- | 10 | -- | | | | OSE Well Record |
| Dual Drilling Co | L04122 | 17.33.7.32322 | | | OWD | 4229 | 249 | 214 | | 5/3/1959 | To/Qal | 214 | 249 | 35 | 247 | 3982 | | | OSE Well Record |
| Kewanee Oil Co | L02771 | 17.33.7.4000 | | | PS | 4217 | 227 | 182 | | 6/28/1955 | To/Qal | 164 | 215 | 45 | 222 | 3995 | | | OSE Well Record |
| Thunderbird Drilling Co | L03749 | 17.33.9.342113 | | | OWD | 4195 | 230 | 160 | | 12/19/1957 | To/Qal | 160 | 230 | 70 | | | | | OSE Well Record |
| Continental Oil Company | L03528-s-2 | 17.33.9.331432 | | | SRO | 4200 | 262 | 180 | | 7/19/1967 | To/Qal | 198 | 262 | 82 | 252 | 3948 | | | OSE Well Record |
| Potash Company of America: PCA No. 8 | L01880-s-3 | 17.33.12.14110 | | | Min Dev | 4148 | 268 | 155 | | 5/4/1981 | To/Qal | 159 | 230 | 113 | 258 | 3890 | | | OSE Well Record |
| Potash Company of America | L01880-1884 comb | 17.33.12.33444 | | | Min Dev | 4135 | 259 | 115 | | 5/2/1966 | To/Qal | 115 | 250 | 144 | 250 | 3885 | | | OSE Well Record |
| Donnelly Drilling Co | L04333 | 17.33.13.110 | | | OWD | 4136 | 217 | 165 | | 12/4/1959 | To/Qal | 165 | 202 | 52 | -- | | | | OSE Well Record |
| Potash Company of America | L01880-s-2 | 17.33.13.31413 | | | Min Dev | 4124 | 235 | 151 | | 3/16/1972 | To/Qal | 154 | 230 | 84 | 230 | 3894 | | | OSE Well Record |
| Potash Company of America | L01880 | 17.33.13.343 | | | Min Dev | 4129 | 245 | -- | | 8/18/1955 | To/Qal | -- | -- | -- | -- | | | | OSE Well Record (clean-out) |
| Potash Company of America | L01882 | 17.33.13.43444 | | | Min Dev | 4128 | 245 | 144 | | 3/16/1948 | To/Qal | 162 | 228 | 101 | 228 | 3900 | | | OSE Well Record |
| Potash Company of America | L01882 | 17.33.13.434 | | | Min Dev | 4128 | 245 | | | 9/22/1964 | To/Qal | | | | | | | | OSE Well Record (workover) |
| Potash Company of America | L01883 | 17.33.13.44444 | | | Min Dev | 4123 | 259 | 147 | | 7/24/1952 | To/Qal | 120 | 239 | 112 | 241 | 3882 | | | OSE Well Record |
| Potash Company of America | L01883 | 17.33.13.444 | | | Min Dev | | | | | 9/26/1955 | | | | | | | | | OSE Well Record (workover) |
| Midland Drilling Co | L03622 | 17.33.17.12444 | 32.838584 | 103.685601 | OWD | 4207 | 226 | 180 | 4027 | 7/25/1957 | To/Qal | 180 | 200 | 46 | 224 | 3983 | | | OSE Well Record |
| Kewanee Oil Co | L02770 | 17.33.18.24111 | | | PS | 4215 | 214 | 179 | | 6/28/1955 | To/Qal | 169 | 213 | 35 | 213 | 4002 | | | OSE Well Record |
| Kewanee Oil Co | L02773 | 17.33.18.322 | | | PS | 4218 | 214 | 184 | | 6/6/1955 | To/Qal | 196 | 214 | 30 | | 4218 | | | OSE Well Record |
| Kewanee Oil Co | L02773 | 17.33.18.322 | | | PS | 4225 | 220 | 202 | | 7/16/1955 | To/Qal | 202 | 215 | 18 | 215 | 4010 | | | OSE Well Record |
| Henry Black Drilling Co | L03726 | 17.33.18.22113 | | | OWD | 4216 | 208 | 188 | | 11/30/1957 | To/Qal | 188 | 207 | 20 | 207 | 4009 | | | OSE Well Record |
| Warren-Bradshaw Exploration | L02785 | 17.33.20.220 | | | OWD | 4171 | 250 | 190 | | 5/20/1955 | To/Qal | 190 | 235 | 60 | 235 | 3936 | | | OSE Well Record |
| Phillips Petroleum Co | L03133 | 17.33.23.31320 | | | OWD | 4143 | 230 | 160 | 3983 | 3/4/1956 | To/Qal | 158 | 198 | 70 | 220 | 3923 | | | OSE Well Record |
| Phillips Petroleum Co | L03133 | 17.33.23.310 | 32.81832 | 103.6395 | OWD | 4143 | 230 | 70 | 4073 | 9/3/1958 | To/Qal | 158 | 198 | 160 | 220 | 3923 | | | OSE Well Record (workover) |
| Southwest Potash Co | L01695 | 17.33.25.24444 | | | Min Dev | 4093 | 230 | 137 | | 4/21/1950 | To/Qal | 137 | 187 | 93 | 190 | 3903 | | | OSE Well Record |
| Zapata Petroleum Co | L03713 | 17.33.28.143 | | | OWD | 4180 | 210 | dry | | 10/23/1957 | To/Qal | -- | -- | -- | -- | | | | OSE Well Record |
| El Paso Natural Gas Co | L00058-2 misc | 17.33.29.222221 | 32.811945 | 103.682131 | Ind-Dom | 4188 | 244 | 204 | 3984 | 7/22/1958 | To/Qal | 185 | 228 | 40 | 244 | 3944 | | | OSE Well Record |
| | | | | | | | | 201.35 | | 3/14/1961 | | | | | | | | | GAI BLM 1978 |
| Oil Test | | 17.33.29.34411 | | | Oil Test | 4044 | | 61.43 | 3982.57 | 2/16/1971 | To/Qal | | | | | | | | GAI BLM 1978 |

ATTACHMENT A-3
Records of Wells in the Vicinity of the DNCS Site
DNCS Environmental Solutions

| Owner or OCD Designation | OSE Permit Number | Location PLS | Location Lat D.ddd | Location Long D.ddd | Use | LS Elev | TD | WL | WL Elev. | Date | WBZ | Top WBZ | Bottom WBZ | WBZ thickness | Trc top | Trc elev | Tsr | Driller Yield | Comments or source |
|----------------------------------|-------------------|-----------------|--------------------|---------------------|-------|---------|---|--------|-----------|------------|------------------------------|---------|------------|---------------|---------|----------|-----|---------------|-----------------------------|
| Conoco MCA Unit Battery 4 #133 | | 17.33.30.11000 | 32.801966 | 103.709129 | OCD | 4033 | casing to 3913, redbeds to 515, anhydrite 515-533 | | | | | | | | 28 | 4005 | | | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #134 | | 17.33.30.12000 | | | OCD | 4057 | casing to 1185, redbeds to 1145 | | | | | | | | 45 | 4012 | | | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #135 | | 17.33.30.14000 | | | OCD | 4062 | casing to 20 | | | | | | | | 85 | 3977 | | | OCD Record 5/11/78 |
| Conoco MCA Unit Battery 4 #197 | | 17.33.30.31111 | 32.80457 | 103.710241 | OCD | 4037 | casing to 3963, redbeds to 791, sandstone 628-650 | | | | | | | | 96 | 3941 | | | OCD Record 5/11/78 |
| Walter Williams stock well | | 17.33.30.124 | 32.810128 | 103.703623 | | 4045 | 70 | 3975 | 7/29/1954 | | | | | | | | | | Nicholson & Clebsch |
| | | 17.33.30.12432 | | | | 4053 | 69.14 | | 2/16/1971 | | | | | | | | | | GAI BLM 1978 |
| Cities Svc SMGSA Unit Tract 1 #2 | | 17.33.30.42000 | 32.803774 | 103.696154 | OCD | 4055 | casing to 1199 | | | | | | | | 145 | 3910 | | | OCD Record 5/11/78 |
| DNCS Properties LLC Boring 5 | | 17.33.31. | 32.78815 | 103.69491 | | 3979.03 | 150 | dry | | | | | | 0 | 65 | 3914.03 | | | DNCS Site Boring Log |
| DNCS Properties LLC Boring 6 | | | 32d46m54.1 | 103d42m27.1s | | 3939.5 | 75 | dry | | | | | | 0 | 67 | 3872.5 | | | DNCS Site Boring Log |
| Open Cased Hole | | 17.33.33.4224 | | | | 4082 | | 130.96 | 3951.04 | 2/16/1971 | To/Qal | | | | | | | | GAI BLM 1978 |
| Dillard & Walterader Drilling Co | L 04363 | 17.33.35.32142 | | | OWD | 4122 | 226 | 160 | | 1/5/1960 | To/Qal | 170 | 200 | 66 | 222 | 3900 | | | OSE Well Record |
| Gulf Oil Corp | L 05096 | 17.33.35.433 | | | OWD | 4124 | 233 | 150 | | 4/6/1968 | To/Qal | 150 | 230 | 83 | 230 | 3894 | | | OSE Well Record |
| Gulf Oil Corp | L 05096 | 17.33.35.43332 | | | OWD | 4120 | 233 | 150 | | 3/15/1963 | To/Qal | 150 | 230 | 83 | 230 | 3890 | | | OSE Well Record |
| BE Frizzell | CP 566 | 18.32.4.144 | | | dom | 3864 | 133 | 65 | | 6/3/1977 | To/Qal | 65 | 133 | 68 | 129 | 3735 | | | OSE Well Record |
| Virgil Linam | CP 672 | 18.32.7.44233 | 32.756902 | 103.79895 | stock | 3759 | 524 | 430 | 3329 | 8/7/1992 | Trc | 460 | 489 | 29 | 100 | 3659 | | | OSE Well Record |
| Virgil Linam | CP 672 | 18.32.7.44144 | | | stock | 3767 | 540 | 460 | 3307 | 1/29/1985 | Trc | 498 | 510 | | 647 | | | 12 | OSE Well Record |
| Billy Williams | Not permitted | 18.32.16.223433 | 35.752 | 103.7652 | exp | 3794 | 100 | dry | | 9/3/1991 | -- | -- | -- | 0 | 94 | 3700 | | | OSE Well Record |
| Uncased open hole | | 18.32.16.22433 | | | | 3973 | 100 | 84.18 | 3888.82 | 3/18/1968 | To/Qal | | | | | | | | GAI BLM 1978 |
| Domestic Well | | 18.32.20.13311 | | | dom | 3470 | 270 | 179.35 | 3290.65 | 2/23/1971 | Trc | | | | | | | | GAI BLM 1978 |
| Oil test | | 18.32.22.32322 | | | | 3763 | | 434.41 | 3328.59 | | Trc | | | | | | | | GAI BLM 1978 |
| TXO Production | CP 677 | 18.32.26.11143 | 32.724776 | 103.744505 | OWD | 3768 | 700 | dry | | 5/9/1985 | Sandstone 500-605 | | | 0 | 116 | 3652 | | | OSE Well Record |
| Duval Corp. | O 13 002 | 18.32.32.111244 | | | exp | 3701 | 2060 | | | 6/22/1977 | 2 WBZ's Trc @ 274, Tsr @ 575 | | | | | 3701 | 575 | | OSE Well Record |
| Windmill | | 18.32.34.22241 | | | stock | 3721 | | 117.46 | 3603.54 | 4/6/1971 | Trc | | | | | | | | GAI BLM 1978 |
| Open Cased Hole | | 18.33.3.34133 | | | | 4015 | | 60.1 | 3954.9 | 4/5/1966 | To/Qal | | | | | | | | GAI BLM 1978 |
| OXY USA Inc. | CP 758 | 18.33.4.34233 | 32.771967 | 103.669204 | exp | 3989 | 250 | dry | | 5/10/1991 | -- | -- | -- | | 65 | 3924 | | | OSE Well Record |
| DNCS Properties LLC Boring 3 | | | 32.77692 | 103.70411 | exp | 3940.23 | 150 | dry | | 2/6/2013 | | | | | 45 | 3895.23 | | | DNCS Site Boring Log |
| DNCS Properties LLC Boring 4 | | | 32.777 | 103.69465 | exp | 3968.20 | 150 | dry | | 2/9/2013 | | | | | 50 | 3918.2 | | | DNCS Site Boring Log |
| BJ Wooley | CP 546 | 18.33.9.42241 | 32.76111 | 103.660559 | Com | 3978 | 90 | 70 | 3908 | 6/3/1975 | To/Qal | 70 | 85 | 20 | 85 | 3893 | | | OSE Well Record |
| | L 6131 | 18.33.8.213 | 32.766525 | 103.68429 | | | 194 | 100 | | | | 130 | 193 | 63 | | | | | OSE Waters POD summary |
| Heyco | CP 702 | 18.33.11.314112 | | | OWD | 4054 | 100 | | | 10/21/1986 | To/Qal | 52 | 82 | 100 | 82 | 3972 | | 40 | OSE Well Record |
| Heyco | CP 701 | 18.33.11.314121 | | | OWD | 3997 | 100 | | | 10/20/1986 | To/Qal | 54 | 84 | 100 | 84 | 3913 | | 40 | OSE Well Record |
| BJ Wooley | L 8288 | 18.33.12.33334 | | | Com | 3997 | 79 | 60 | | 5/11/1982 | To/Qal | 60 | 80 | 19 | | 3997 | | | OSE Well Record |
| Yates Drilling Co | L 2878 | 18.33.12.440 | | | OWD | 4089 | 205 | 150 | | 5/30/1955 | To/Qal | 150 | 205 | 55 | 200 | 3889 | | | OSE Well Record |
| Scharbauer Cattle Co | L 6347 | 18.33.12.440 | | | stock | | 170 | 130 | | 7/12/1968 | To/Qal | | | 40 | | | | | OSE Well Record (clean-out) |
| BJ Wooley | CP 623 | 18.33.13.11112 | | | Com | 3989 | 82 | 60 | | 5/10/1982 | To/Qal | 70 | 80 | 22 | 80 | 3909 | | 40 | OSE Well Record |
| Sun Oil | CP 689 | 18.33.13.12122 | | | OWD | 4003 | 100 | | | 12/7/1985 | To/Qal | 70 | 95 | 100 | 95 | 3908 | | 100 | OSE Well Record |
| KMR Inc | CP 768 exp | 18.33.13.21142 | | | exp | 4018 | 115 | 70 | | 5/6/1992 | To/Qal | 80 | 110 | 45 | 110 | 3908 | | 20 | OSE Well Record |
| Unnamed well (Nicholson) | | 18.33.14.111 | 32.753778 | 103.640397 | stock | 3965 | 40 | 35.8 | 3929.2 | 6/3/1954 | Qal | | | 4.2 | 40 | 3925 | | | Nicholson and Clebsch |
| Unnamed well (Nicholson) | | 18.33.19.142 | 32.735618 | 103.703433 | stock | 3820 | | >140 | <3680 | | Tr(?) | | | | | | | | Nicholson and Clebsch |
| Unnamed well (Nicholson) | | 18.33.34.133 | 32.704955 | 103.658439 | | 3760 | 200 | 177.4 | 3582.6 | 12/9/1958 | Tr(?) | | | | | | | | Nicholson and Clebsch |
| W.E. Ellison | L 3454 | 18.33.30.220 | | | dom | 3791 | 100 | 35 | 3756 | 3/30/1957 | To/Qal | 70 | 97 | 65 | 97 | 3694 | | | OSE Well Record |

SECTION _____

TOWNSHIP 17S

RANGE 32E

WELL RECORD

INSTRUCTIONS: This form should be executed in triplicate, preferably typewritten, and submitted to the nearest district office of the State Engineer. All sections, except Section 5, shall be answered as completely and accurately as possible when any well is drilled, repaired or deepened. When this form is used as a plugging record, only Section 1A and Section 5 need be completed.

Section 1

| | | | |
|----|-----|---------|--|
| | | | |
| | | | |
| #2 | Map | 2-127-2 | |
| | | | |

(Plat of 640 acres)

(A) Owner of well Water Flood Assoc., Inc.
 Street and Number 3017 Lubbock St.
 City Ft Worth 9, State Texas
 Well was drilled under Permit No. 1-3980 and is located in the
NE 1/4 NE 1/4 NE 1/4 of Section 1 Twp. 17S Rge. 32E
 (B) Drilling Contractor O. R. Musslowwhite License No. WD99
 Street and Number Box 56
 City Hobbs, State New Mexico
 Drilling was commenced March 6, 1960
 Drilling was completed March 15, 1960

Elevation at top of casing in feet above sea level 4257 Total depth of well 270
 State whether well is shallow or artesian shallow Depth to water upon completion 200

Section 2

PRINCIPAL WATER-BEARING STRATA

| No. | Depth in Feet | | Thickness in Feet | Description of Water-Bearing Formation |
|-----|---------------|-----|-------------------|--|
| | From | To | | |
| 1 | 210 | 265 | 55 | Sand, grey tight |
| 2 | | | | |
| 3 | | | | |
| 4 | | | | |
| 5 | | | | |

Section 3

RECORD OF CASING

| Dia in. | Pounds ft. | Threads in | Depth | | Feet | Type Shoe | Perforations | |
|---------|------------|------------|-------|--------|------|-------------|--------------|-----|
| | | | Top | Bottom | | | From | To |
| 10 3/4 | 40 | 8 | 0 | 270 | 270 | Shoe collar | 122 | 260 |
| | | | | | | | | |
| | | | | | | | | |

Section 4

RECORD OF MUDDING AND CEMENTING

| Depth in Feet | | Diameter Hole in in. | Tons Clay | No. Sacks of Cement | Methods Used |
|---------------|----|----------------------|-----------|---------------------|--------------|
| From | To | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Section 5

PLUGGING RECORD

Name of Plugging Contractor _____ License No. _____
 Street and Number _____ City _____ State _____
 Tons of Clay used _____ Tons of Roughage used _____ Type of roughage _____
 Plugging method used _____ Date Plugged _____ 19 _____
 Plugging approved by: _____ Cement Plugs were placed as follows:

| No. | Depth of Plug | | No. of Sacks Used |
|-----|---------------|----|-------------------|
| | From | To | |
| | | | |
| | | | |
| | | | |

Basin Supervisor _____

FOR USE OF STATE ENGINEER ONLY

Date Received 1960 MAR 22 AM 8:35

File No. 1-3980 Use Water Flood Location No. 1232.122233

LOG OF WELL

L S Elev _____ 4251 ✓
 Depth to K _____ Trc 2654
 Elev of K _____ Trc 3986?

Hydro. Survey _____ Field Check ☒

Other _____

O. B. Mussler
Well Driller

change the location on map
to read Sta. 1.22233
Was plotted @ 1.33322

WELL RECORD

INSTRUCTIONS: This form should be executed in triplicate, preferably typewritten, and submitted to the nearest district office of the State Engineer. All sections, except Section 5, shall be answered as completely and accurately as possible when any well is drilled, repaired or deepened. When this form is used as a plugging record, only Section 1A and Section 5 need be completed.

Section 1

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |

(A) Owner of well B.E. Paschall,
 Street and Number 412 Central St.
 City Artesia State New Mexico,
 Well was drilled under Permit No. L-4079 and is located in the
1/4 1/4 1/4 of Section I Twp. 17-S Rge. 32-E,
 (B) Drilling Contractor G.O. Aldredge License No. WD. 79
 Street and Number Box 379
 City Lovington State New Mexico,
 Drilling was commenced Feb. 18 1960
 Drilling was completed March 2, 1960

(Plat of 840 acres)

Elevation at top of casing in feet above sea level _____ Total depth of well 225 Ft.
 State whether well is shallow or artesian Shallow Depth to water upon completion 175 Ft.

Section 2

PRINCIPAL WATER-BEARING STRATA

| No. | Depth in Feet | | Thickness in Feet | Description of Water-Bearing Formation |
|-----|---------------|-----|-------------------|--|
| | From | To | | |
| 1 | 192 | 210 | 18 | Red water sand |
| 2 | 212 | 224 | 12 | Brown Water sand |
| 3 | | | | |
| 4 | | | | |
| 5 | | | | |

Section 3

RECORD OF CASING

| Dia in. | Pounds ft. | Threads in | Depth | | Feet | Type Shoe | Perforations | |
|---------|------------|------------|-------|--------|------|-----------|---------------|-----|
| | | | Top | Bottom | | | From | To |
| 8" | | welded | 0 | 225 | 225 | Collar | 182 | 225 |
| | | | | | | | Gravel packed | |
| | | | | | | | | |
| | | | | | | | | |

Section 4

RECORD OF MUDDING AND CEMENTING

| Depth in Feet | | Diameter Hole in in. | Tons Clay | No. Sacks of Cement | Methods Used |
|---------------|----|----------------------|-----------|---------------------|-------------------|
| From | To | | | | |
| | | 12 | | | 10 sacks mud used |
| | | | | | |
| | | | | | |

Section 5

PLUGGING RECORD

Name of Plugging Contractor _____ License No. _____
 Street and Number _____ City _____ State _____
 Tons of Clay used _____ Tons of Roughage used _____ Type of roughage _____
 Plugging method used _____ Date Plugged _____ 19 _____
 Plugging approved by: _____ Cement Plugs were placed as follows:

| No. | Depth of Plug | | No. of Sacks Used |
|-----|---------------|----|-------------------|
| | From | To | |
| | | | |
| | | | |
| | | | |
| | | | |

Basin Supervisor _____

FOR USE OF STATE ENGINEER ONLY

Date Received _____

22 18 AM 25 MAR 1960

File No. L-4079

Used Cement & Sand Location No. 17 32.1 32343

LOG OF WELL

| | | |
|------------|--|------|
| LS Elev | | 4325 |
| Depth to K | | 224 |
| Elev of K | | 4001 |

Loc. No. 17.22.1, 22243
Hydro. Survey ☒ Field Check ☐

~~SOURCE OF ALTITUDE GIVEN~~

Interpolated from Topog. Sheet: X

Determined by Inst. Leveling

| | |
|-------|--|
| Other | |
|-------|--|

The undersigned hereby certifies that, to the best of his knowledge and belief, the foregoing is a true and correct record of the above described well.

E. B. Rudge
Well Driller

WELL RECORD

INSTRUCTIONS: This form should be executed in triplicate, preferably typewritten, and submitted to the nearest district office of the State Engineer. All sections, except Section 5, shall be answered as completely and accurately as possible when any well is drilled, repaired or deepened. When this form is used as a plugging record, only Section 1A and Section 5 need be completed.

Section 1

| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |

(A) Owner of well W. C. G. - 180000, L. C.
 Street and Number Box 125
 City Maljamar State NEW MEX.
 Well was drilled under Permit No. 3980-X and is located in the
180000, 660, 04E-1, 11N/4 of Section 1 Twp. 17 Rge. 5E
 (B) Drilling Contractor W. J. NICHOLS License No. 73
 Street and Number Box 213
 City LOVINGTON State NEW MEXICO
 Drilling was commenced Sept. 21 1952
 Drilling was completed Oct. 12 1952

(Plat of 640 acres)

Elevation at top of casing in feet above sea level 4242 Total depth of well 255
 State whether well is shallow or artesian SHALLOW Depth to water upon completion 175

Section 2

PRINCIPAL WATER-BEARING STRATA

| No. | Depth in Feet | | Thickness in Feet | Description of Water-Bearing Formation |
|-----|---------------|-----|-------------------|--|
| | From | To | | |
| 1 | 205 | 225 | 20 | gray water sand |
| 2 | 220 | 250 | 22 | gray water sand |
| 3 | | | | |
| 4 | | | | |
| 5 | | | | |

Section 3

RECORD OF CASING

| Dia. in. | Pounds ft. | Threads in | Depth | | Feet | Type Shoe | Perforations | |
|----------|------------|------------|-------|--------|------|-----------|--------------|-----|
| | | | Top | Bottom | | | From | To |
| 1) | 1000 | 6 | 0 | 255 | 255 | 100000000 | 215 | 255 |
| | | | | | | OPEN END | | |
| | | | | | | | | |
| | | | | | | | | |

Section 4

RECORD OF MUDDING AND CEMENTING

| Depth in Feet | | Diameter Hole in In. | Tons Clay | No. Sacks of Cement | Methods Used |
|---------------|----|----------------------|-----------|---------------------|---|
| From | To | | | | |
| | | 16 | GRAVEL | PACKED | SACKS OF GRAVEL PLACED IN HOLE WHILE DRILLING |
| | | | | | |
| | | | | | |

Section 5

PLUGGING RECORD

Name of Plugging Contractor _____ License No. _____
 Street and Number _____ City _____ State _____
 Tons of Clay used _____ Tons of Roughage used _____ Type of roughage _____
 Plugging method used _____ Date Plugged _____ 19 _____
 Plugging approved by: _____ Cement Plugs were placed as follows:

Basin Supervisor _____

FOR USE OF STATE ENGINEER ONLY
 DISTRICT OFFICE
 STATE ENGINEER OFFICE
 Date Received NOV 7 7 AM 1952

File No. L-3980-X Use SRO Location No. 12-32-1-98213

#3 Maljamar 2-127-2

| No. | Depth of Plug | | No. of Sacks Used |
|-----|---------------|----|-------------------|
| | From | To | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

LOG OF WELL

G. O. Aldredge
Well Driller

17. 32. 1. 420